

KELLY

Better Tillage. Better Tomorrow.




KELLY TILLAGE SYSTEM: Model 2006

Improving soil health **now** and for **future** generations

Australian design meets German engineering with the Kelly Tillage System. Made from the ground up for European farmers, this unique tool is designed for efficient and effective tillage of the top 2-4cm of soil. Farmers can trust in Kelly for strength, reliability and a better seedbed for a better bottom line. Farmers can also trust in Kelly for contributing to a sustainable future; the Kelly Tillage System reduces fuel and herbicide use, increases productivity and allows for improvements in soil structure.

MACHINE FEATURES

- Multiple hitch options for customisation
- Low wear rates on ground engaging tools
- Versatile shallow tillage capabilities to suit land and production needs
- Uniform wheels to provide greater stability and floatation
- Floating wing cylinders to follow undulating terrain
- Greasable hinge points and wheel hubs for longevity
- Wide range of Kelly chain options
- Hydraulic chain tension for easy setup

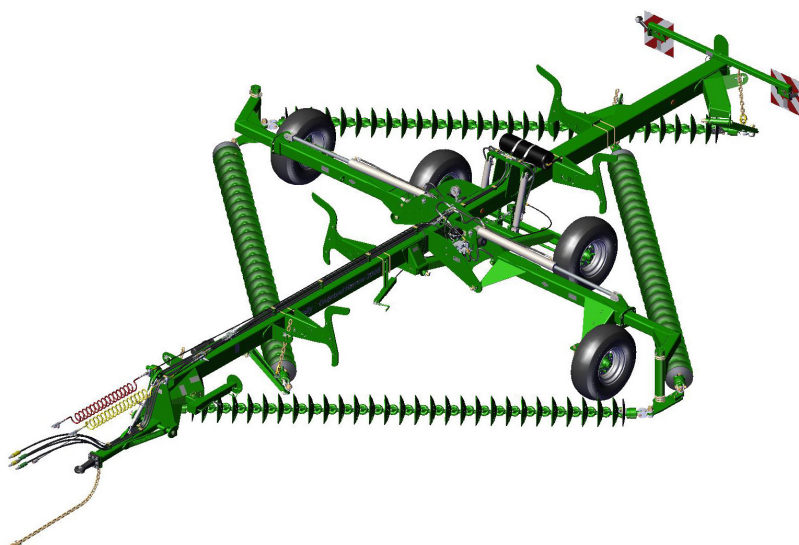

**LOW
MAINTENANCE**



**HIGH FIELD
EFFICIENCIES**



**LOW DIESEL
CONSUMPTION**

The Kelly Tillage System can be used for year-round tillage requirements, including weed control, residue management, levelling and preparing the seedbed for planting, fighting herbicide resistance and mulching cover crops back into the soil. By breaking the soil capillaries in the shallow 2-4cm range, the system is able to reduce evaporation and protect the essential subsurface moisture.



**WEED
CONTROL**



**RESIDUE
MANAGEMENT**



**SEEDBED
PREPARATION**



**COVER
CROPS**

DIMENSIONS

| | |
|--------------------------|--------|
| Transport Length | 10.4 m |
| Transport Width | 2.4 m |
| Transport Height | 3.9 m* |
| Maximum Width (unfolded) | 7.2 m |
| Cut Width | 6.4 m |

* (Transport Height for Model 2006 can be reduced to 3.6m by dumping pressure in the wing cylinder using the valve)

WEIGHT

| | |
|------------------------------|---------|
| Total Weight (without discs) | 4021 kg |
| Total Axle Weight | 4000 kg |

AVERAGE PERFORMANCE

| | |
|------------|-----------|
| at 10km/hr | 5.1 ha/hr |
| at 12km/hr | 6.1 ha/hr |

OPERATING INFORMATION

| | |
|------------------|--------------|
| Speed | 10 - 12 km/h |
| Fuel Consumption | 2.5 - 4 L/ha |

AXLES AND TYRES

| | |
|---------------------|--------------------|
| Main Axle | 606XF track 2100mm |
| Wing Stubs Axle | 606XR |
| Main and Wing Tyres | 11.5/80-15.3 |



CL1



K4



CL2



SPIKED



W36



PRICKLE

Kelly Disc Chains are effective, innovative and unique, used for everything from primary tillage to planting pastures. With a custom Disc Chain configuration, every farmer can find a setup to suit their soil conditions.





Better Tillage. Better Tomorrow.

KELLY

Head Office (Australia)
+61 8 8667 2253

Global Locations
Visit our website for contact details

Email sales@kellytillage.com
kellytillage.com

