



Revision E - September 2018

Serial Number:



Thank you for choosing a Kelly Engineering product

We trust that you find the following manual clear and easy to follow. If you should require additional customer support or assistance, please do not hesitate to contact us.

Spare parts can be purchased, as required, through your local dealer or by contacting Kelly Engineering Australia or in the United States, Hood & Company.

Kelly Engineering welcomes feedback. Should you have any difficulties that you wish to raise, suggestions for improvement or modifications that you feel would enhance our products we look forward to hearing from you.

Australia Kelly Engineering

PO Box 100

Booleroo Centre SA 5482 Phone: + 61 8 8667 2253

Fax: + 61 8 8667 2250

Email: sales@kellyengineering.com.au

Spare Parts: parts@kellyengineering.com.au **Website:** www.kellyengineering.com.au

United States Kelly Engineering

526 1st Street PO Box 121

New Glarus WI 53574 Phone: 608 527 2386

Mobile: 316 304 6178 Email: waynerosenbaum@kellyharrows.com

Website: www.kellyharrows.com

Spare Parts Hood & Company Inc Springfield MO

Phone: 417 865 2100 **Fax:** 417 865 2105

Email: hoodco@hoodco.com

Contents


Section 1: Unpacking	Page no 5
Section 2: Parts and Assembly	7
Section 3: Hydraulics Setup	85
Section 4: Light Kit	112
Section 5: Chain Assembly	124
Section 6: Diagrams & Charts	131
Section 7: Operation & Assembly Updates	136





This symbol indicates which bag the relevant fastners are in

This symbol indicates which bag the relevant hydraulics are in



This symbol indicates which way the machine is travelling

This document highlights the part numbers and locations of U-bolts to suit machines constructed of imperial sized steel tube.

Note: New machines will be supplied with the specific imperial sized U-bolt. Please use the specific imperial sized part number when ordering U-bolts as a spare part.

0271-12105104	0271-12107106U	U-Bolt M12 x 107 Deep x 106 Wide
0271-128077	0271-1287279U	U-Bolt M12 x 82 Deep x 76 Wide
0271-16112104	0271-16114106U	U-Bolt M16 x 114 Deep x 106 Wide
0271-16160127	0271-16162129U	U-Bolt M16 x 162 Deep x 129 Wide
0271-1616077	0271-1616779U	U-Bolt M16 x 190 Deep x 106 Wide
0271-16185104	0271-16190106U	U-Bolt M16 x 190 Deep x 106 Wide
0271-168577	0271-168779U	U-Bolt M16 x 87 Deep x 79 Wide

Bolt Torque Settings

Bolt Type		Whee	el nut			U Bolt	t		Grad	8.8 ab	Bolt		Gra 10.9	ade Bolt	Grade 8 Bolt
Bolt Size	M18	M20	1/2"	9/16"	M10	M12	M16	M10	M12	M16	M20	M24	M20	M24	1" UNF
Ft lb	255	265	90	100	22	36	55	32	48	140	190	270	300	350	849
Nm	345	360	125	140	30	50	75	44	65	190	260	370	406	475	1151

[1] When fitting a wheel & tire to a hub, tighten the wheel nuts in rotation to the correct tension. To achieve this choose a wheel nut & tighten, then proceed clockwise to the next wheel nut & tighten & so on until all wheel nuts are tight. Then repeat the procedure to check that all nuts are tight. Do not use impact tools to tighten wheel nuts. For a guide to the correct tension of the wheel nuts please use the appropriate tension for your size wheel nuts from the Bolt Torque Settings table.

Torque values are for dry threads and surfaces however it is permissible to apply a small amount of anti corrosive oil to the threads.

Section 1 Unpacking





Before cutting straps attach slings or chains and take the weight of the frames to avoid them slipping or falling and causing injury.



CAUTION

Wear eye and hand protection when cutting straps. Sharp edges are exposed as straps separate and may cause injury.



CAUTION


To avoid falling or moving components, before cutting straps attach slings or chains to individual pieces and only cut the straps holding the piece to be lifted.

- Remove boxes from rear of container one at a time using a forklift truck. Each box weighs approximately 2600 lbs (1200 kg)
- Cut straps holding bundles and separate parts and place in assembly area
- Identify parts for each machine by serial no. or description and separate. Open parts box and check that all parts are accounted for against checklist
- Once all parts have been identified machines are ready for assembly
- Read assembly instructions before proceeding.


Section 2 Parts & Assembly

Please note Start at page 22 for machines that are part assembled on delivery


Item No.	Description	Qty	Number
1	46' Centre Frame	1	1646-01
2	LH Walking Axle Arm	2	1610-30
3	RH Walking Axle Arm	2	1610-31
4	1-1/2 ID x 2" DU Bush	8	0113-MB 24DU32




Please note bushes are factory inserted

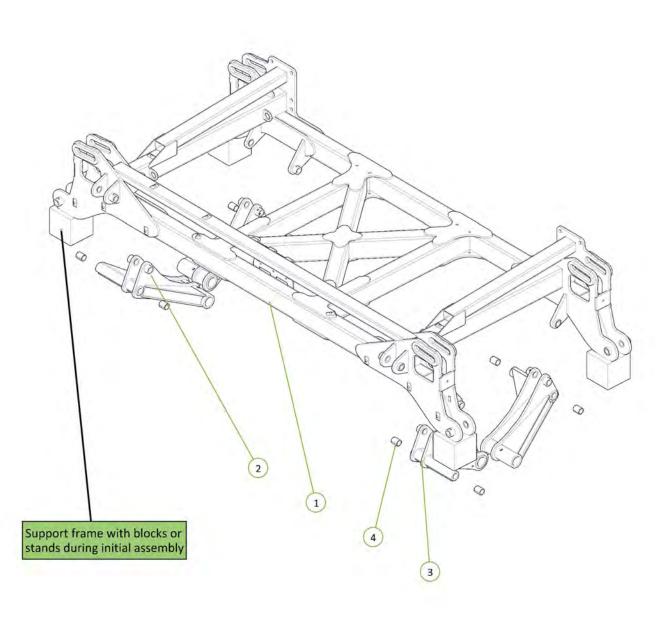



Item No.	Description	Qty	Number
1	Cotter Pin M13 x 63	4	0261-PINC1363
2	Walking Axle Pivot Pin	4	1601-P38-525
3	Nyloc Nut M12	4	0221-NYL12
4	M12 x 65 grade 8.8 ZP Bolt	4	0211-1265
5	Washer High Tensile 1 3/8"	8	0232-HT11-2



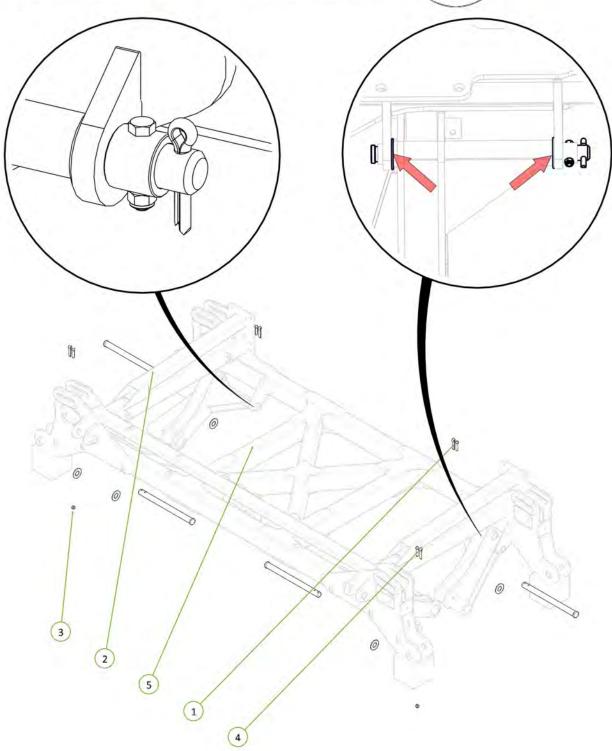


Item No.	Description	Qty	Number
1	Walking Axle Linkage	2	1610-33
2	1-1/2 ID x 1-1/4mm DU Bush	8	0113-MB 24DU20
3	Walking Axle Linkage Pivot Pin	4	1601-P38-220
4	Cotter Pin M13 x 63	4	0261-PINC1363
5	M12 x 65 grade 8.8 ZP Bolt	4	0211-1265
6	Nyloc Nut M12	4	0221-NYL12




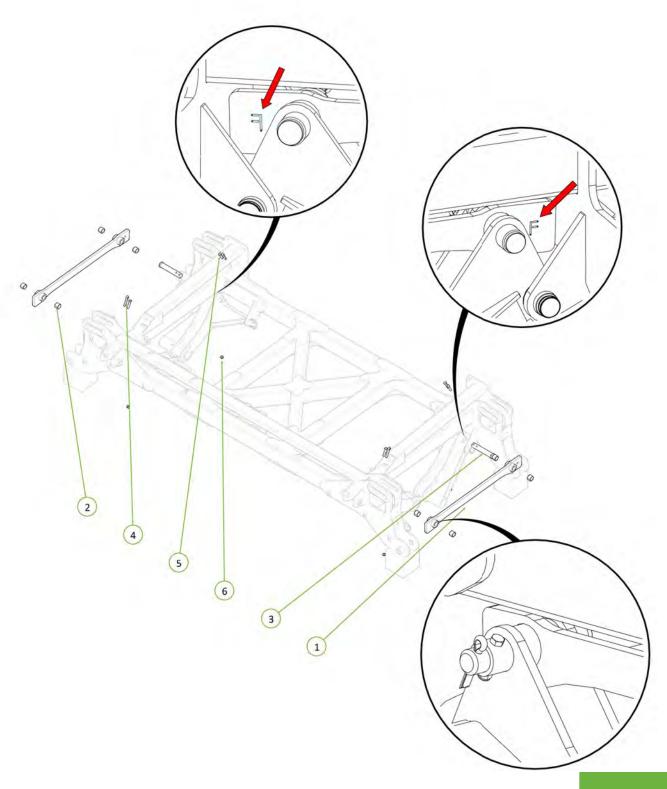

Item No.	Description	Qty	Number
1	2.75"R C/W 6 tonne 8 on 8" PCD Complete Assembly	4	0733-SH27596880
2	M20 x 120 grade 8.8 ZP Bolt	4	0211-20120
3	Nyloc Nut M20	4	0221-NYL20







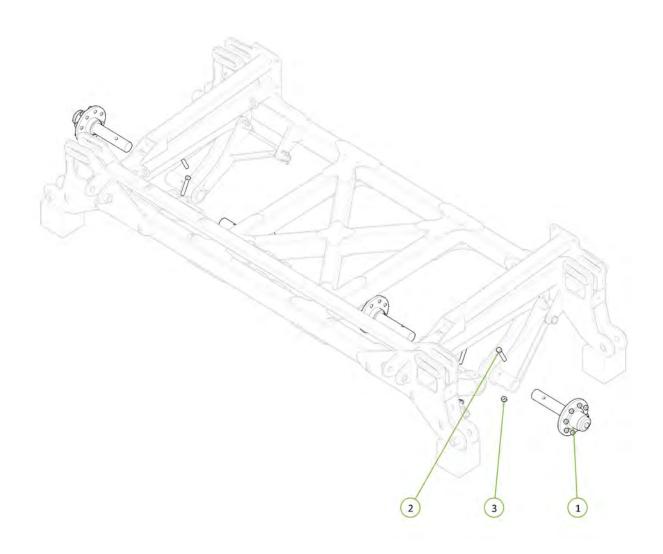


Item No.	Description	Qty	Number
1	Wing Folding Buffer	4	1201-12
2	M16 x 55 grade 8.8 zp Bolt	4	0211-1655
3	Washer Flat M16	4	0231-F16
8	Nyloc Nut M16	4	0221-NYL16






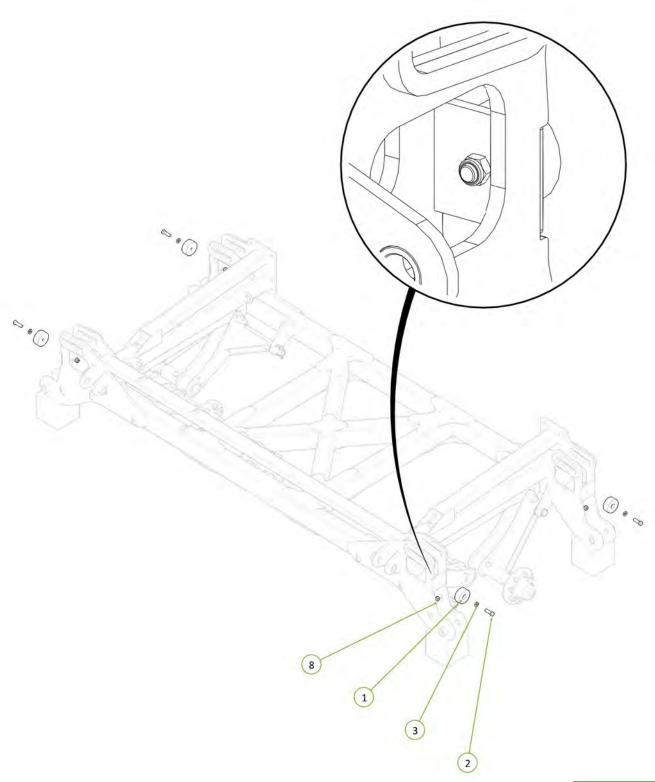



Item No.	Description	Qty	Number
1	46' RH Inner Wing Frame	1	1646-04
2	35 ID x 30mm DU Bush	4	0113-MB 3530DU
3	PCH Wing Pivot Pin	2	0801-10-08-235
4	COTTER PIN M13 X 63mm	2	0261-PINC1363
5	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265
6	Nyloc Nut M12	2	0221-NYL12



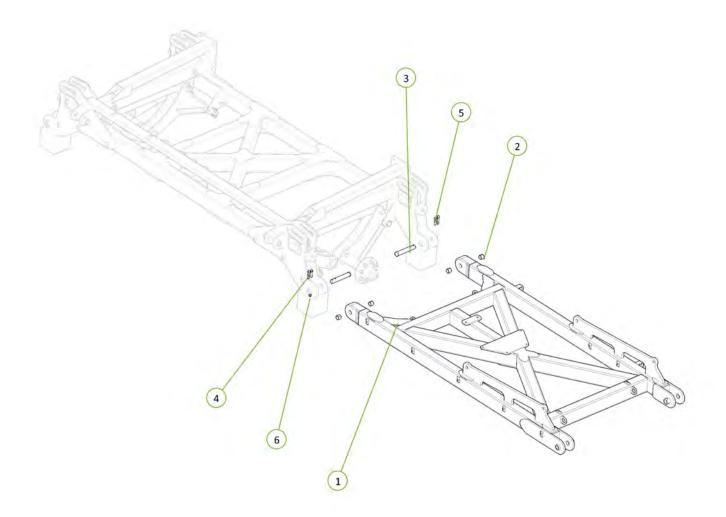

Item No.	Description	Qty	Number
1	46' RH Outer Wing Frame	1	1646-06
2	35 ID x 30mm DU Bush	4	0113-MB 3530DU
3	PCH Wing Pivot Pin	2	0801-10-08-235
4	COTTER PIN M13 X 63mm	2	0261-PINC1363
5	Nyloc Nut M12	2	0221-NYL12
6	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265




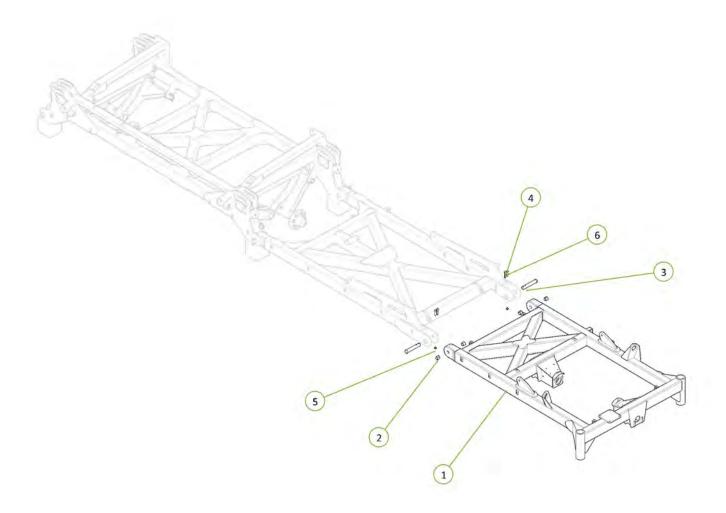


Item No.	Description	Qty	Number
1	2.75"R C/W 6 tonne 8 on 8" PCD Complete Assembly	2	0733-SH27596880
2	M20 x 170 grade 8.8 ZP Bolt	2	0211-20170
3	Nyloc Nut M20	2	0221-NYL20






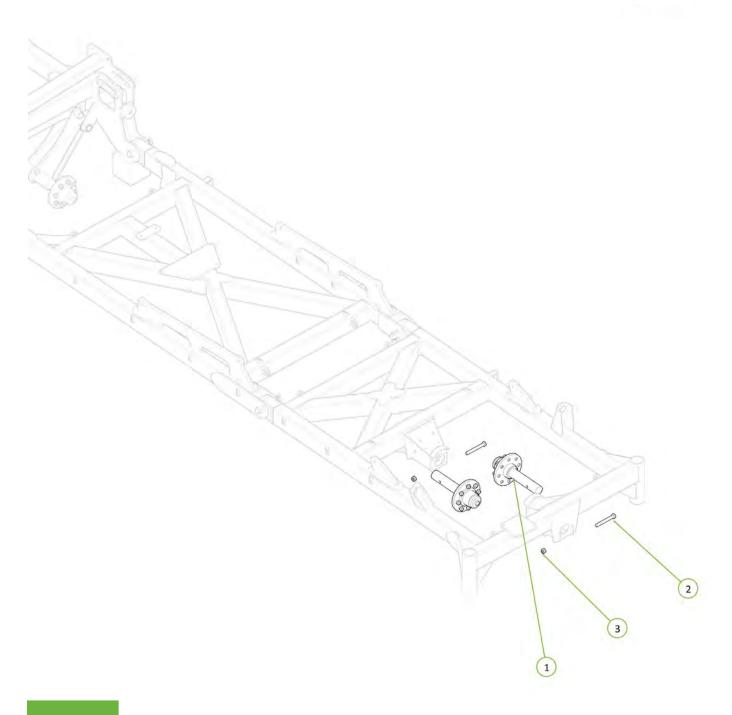


Item No.	Description	Qty	Number
1	46' LH Inner Wing Frame	1	1646-05
2	Cotter Pin M13 x 63	2	0261-PINC1363
3	35 ID x 30mm DU Bush	4	0113-MB 3530DU
4	PCH Wing Pivot Pin	2	0801-10-08-235
5	Nyloc Nut M12	2	0221-NYL12
6	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265




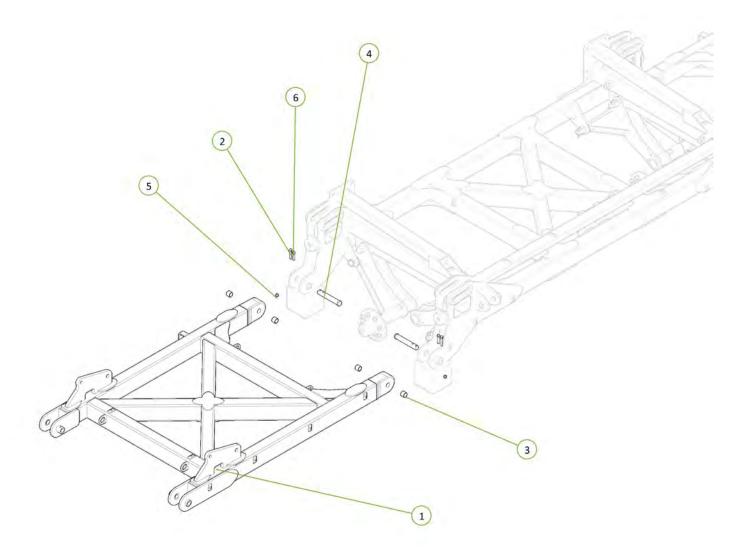

Item No.	Description	Qty	Number
1	46' LH Outer Wing Frame	1	1646-07
2	35 ID x 30mm DU Bush	4	0113-MB 3530DU
3	PCH Wing Pivot Pin	2	0801-10-08-235
4	COTTER PIN M13 X 63mm	2	0261-PINC1363
5	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265
6	Nyloc Nut M12	2	0221-NYL12






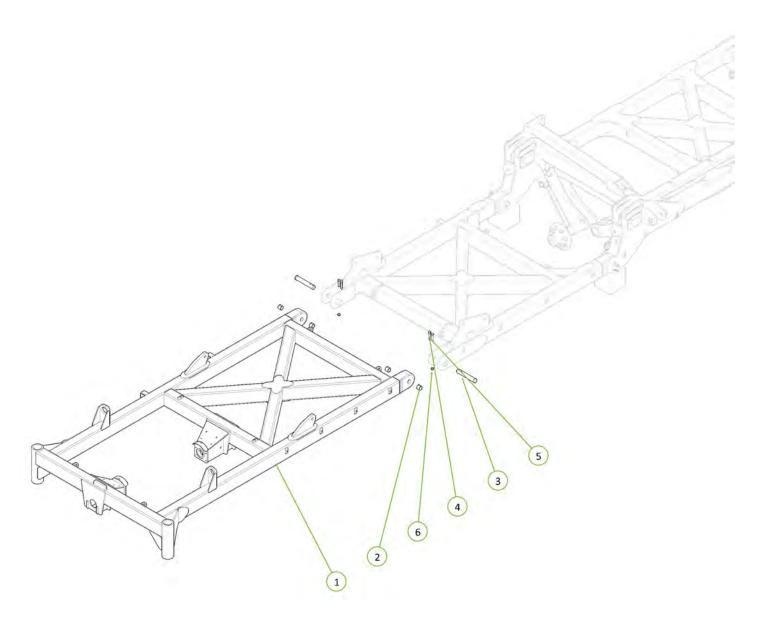


Item No.	Description	Qty	Number
1	2.75"R C/W 6 tonne 8 on 8" PCD Complete Assembly	2	0733-SH27596880
2	Nyloc Nut M20	2	0221-NYL20
3	M20 x 170 grade 8.8 ZP Bolt	2	0211-20170



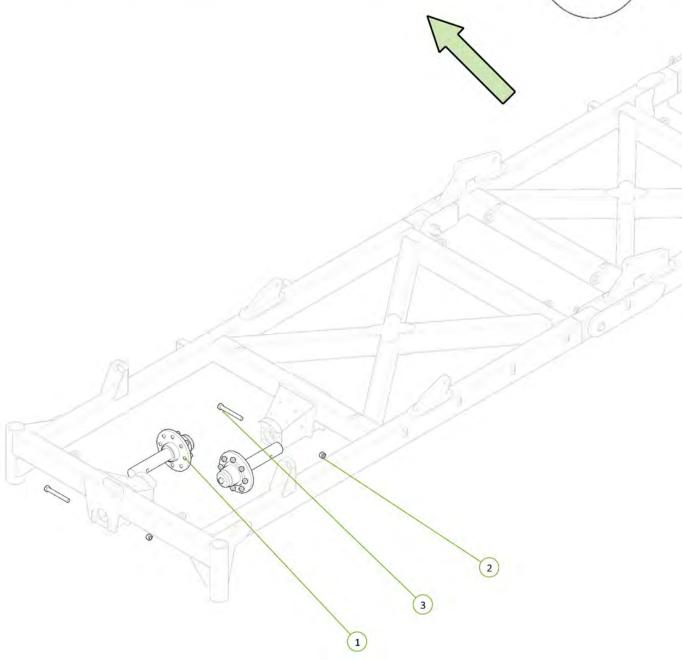



Item No.	Description	Qty	Number
1	5" Bore 30" Stroke 3 1/8" S/Tube 2" Rod Hydraulic Cylinder	4	0311-530STSP
2	Long Cylinder Pin Bearing Bush	8	1201-19



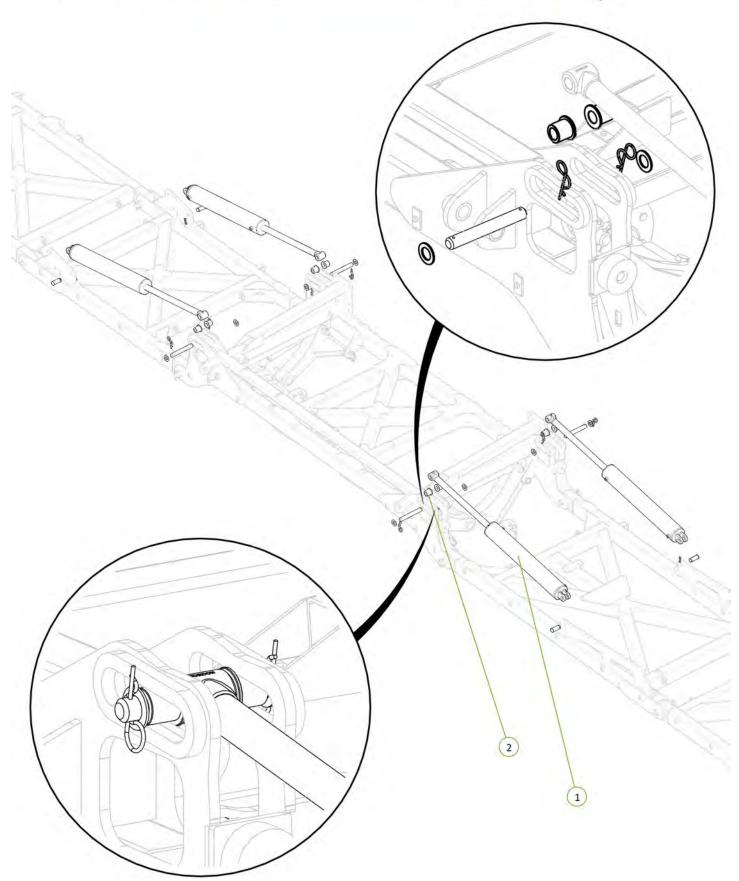


Item No.	Description	Qty	Number
1	3" Bore x 24" Stroke 1.5" Rod Cylinder Side Port	2	0311-324SP



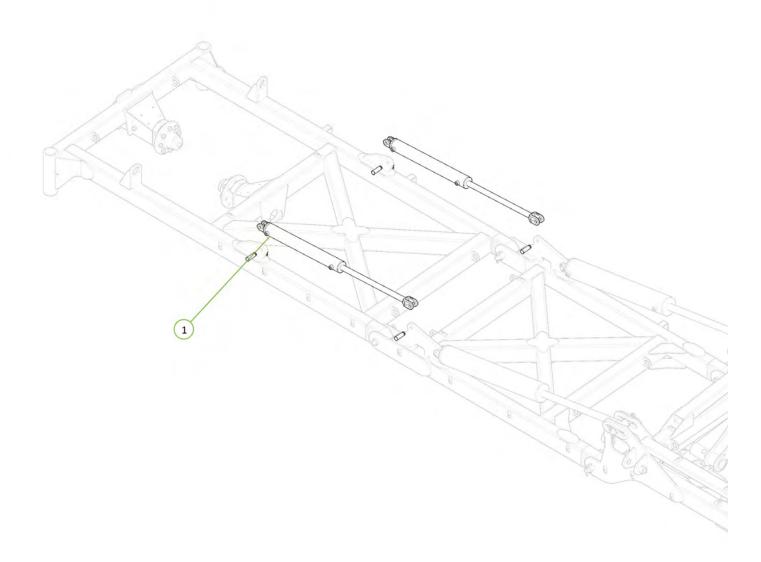



Item No.	Description	Qty	Number
1	3" Bore x 24" Stroke 1.5" Rod Cylinder Side Port	2	0311-324SP



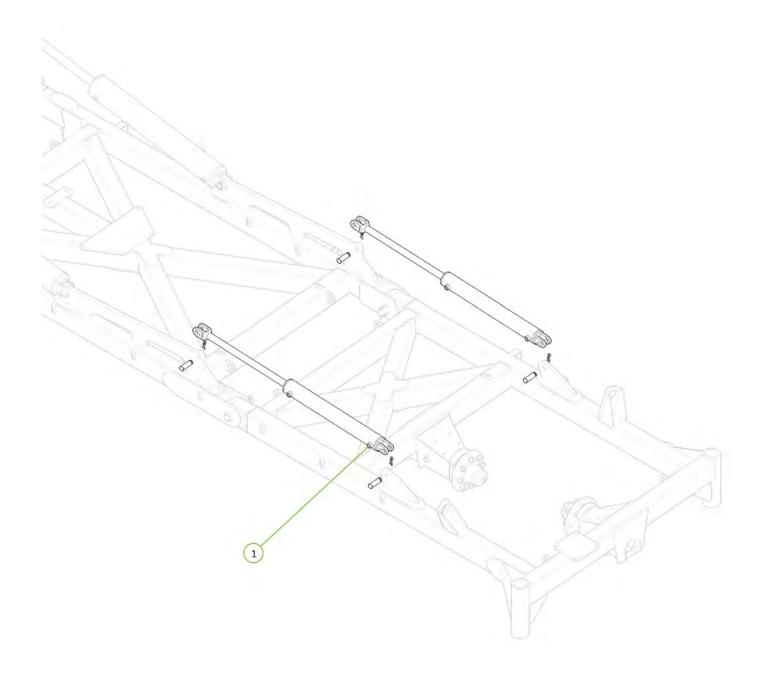


Item No.	Description	Qty	Number
1	46' Front A-Frame Front Section Frame	1	1646-02F
2	46' Front A-Frame Brace Section Frame	1	1646-02B
3	46' Front A-Frame LH Section Frame	1	1646-02L
4	46' Front A-Frame RH Section Frame	1	1646-02R
5	M24 x 75 grade 8.8 zp Bolt	20	0211-2475
6	Nyloc Nut M24	20	0221-NYL24
7	M16 x 55 grade 8.8 zp Bolt	16	0211-1655
8	Nyloc Nut M16	16	0221-NYL16




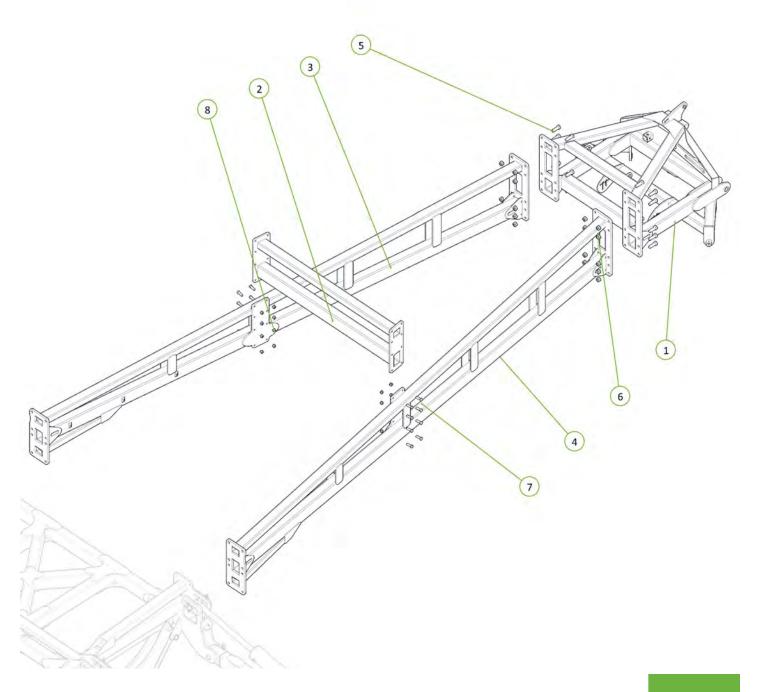


Item No.	Description	Qty	Number
1	Nyloc Nut M24	16	0221-NYL24
2	M24 x 65 grade 8.8 zp Bolt	16	0211-24






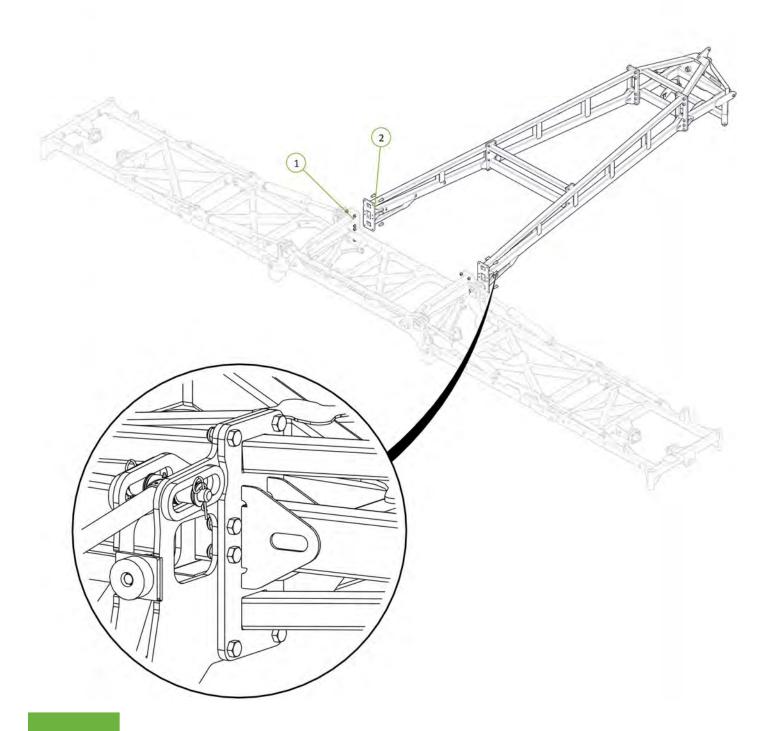


Item No.	Description	Qty	Number
1	400/60-22.5 Tyre on 8 on 8" PCD Rim	8	0751-400-60-22.5TR




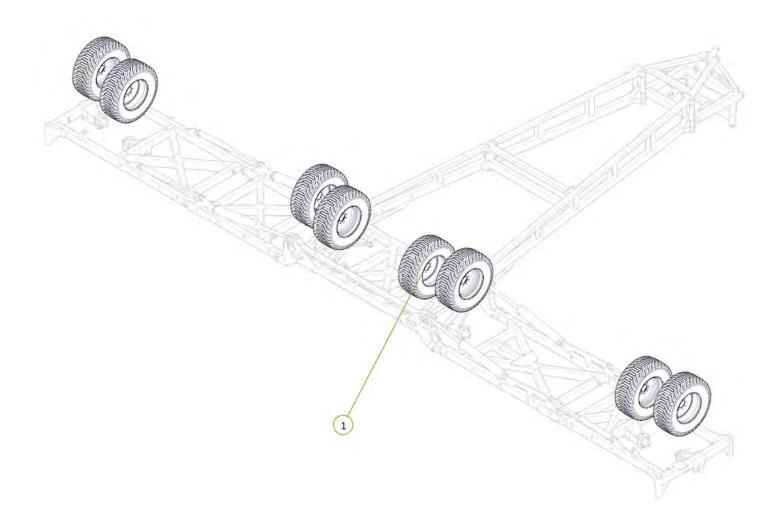

Item No.	Description	Qty	Number
1	Drawbar	1	1610-08
2	35 ID x 30mm DU Bush	4	0113-MB 3530DU
3	PCH Wing Pivot Pin	2	0801-10-08-235
4	Cotter Pin M13 x 63	2	0261-PINC1363
5	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265
6	Nyloc Nut M12	2	0221-NYL12







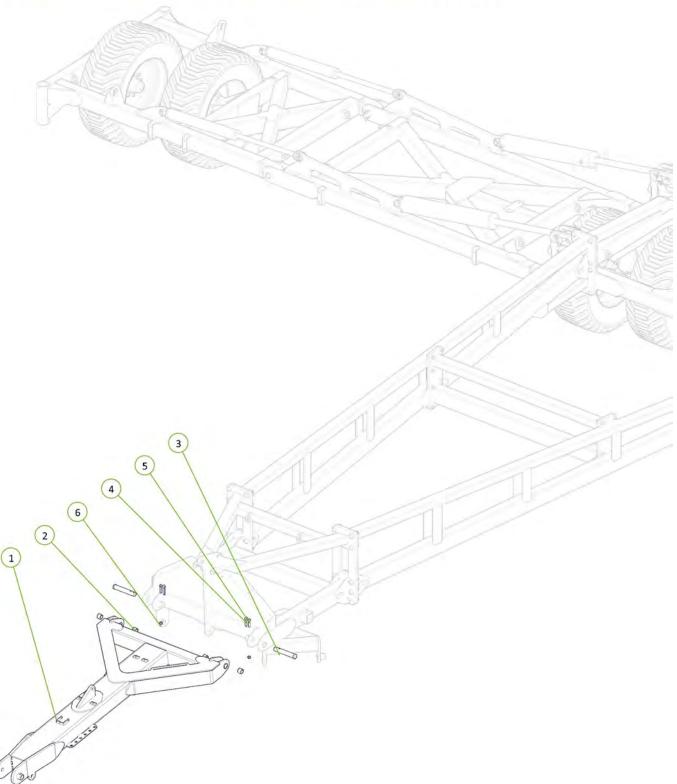


Item No.	Description	Qty	Number
1	Tow Hitch For Bull Pull Swivel Hitch	1	0810-09-BP
2	Swivel Hitch Assy CAT 5 (2-1/2" to 2-3/4" Pin)	1	0801-HITCHCAT5
3	Tow Hitch Pivot Pin	1	0801-10-06
4	1" UNF Grade 8 ZP Bolt	3	0213-1 51-2
5	Nyloc Nut 1" UNF	3	0223-NYL1
6	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265
7	Nyloc Nut M12	2	0221-NYL12




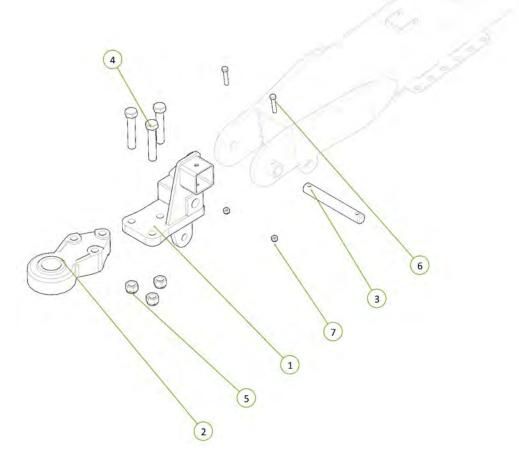




Item No.	Description	Qty	Number
1	Parallel Arm	1	1610-22
2	Clevis Pin 25mm x 75mm	2	0801-KE0307-1
3	Washer Flat M24	2	0231-F24
4	Cotter Pin M6 x 50mm	2	0261-PINC650



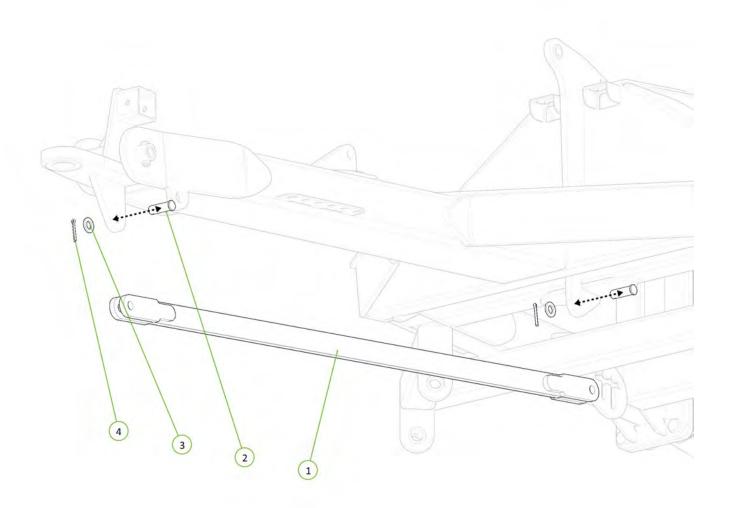







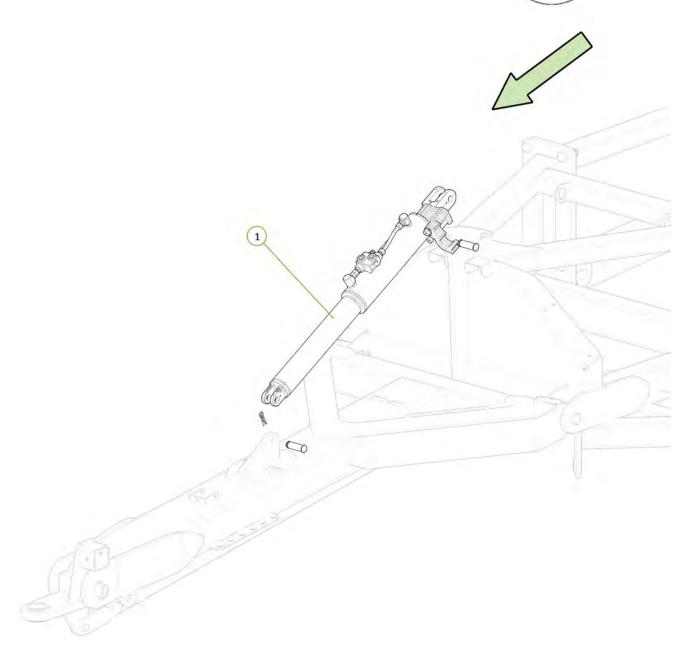



Item No.	Description	Qty	Number
1	Rear A-Frame Front Section	1	1646-03-1
2	Rear A-Frame Rear Section Single King Pin	1	1646-03S-2
3	M20 x 60 grade 8.8 ZP Bolt	16	0211-2060
4	Nyloc Nut M20	16	0221-NYL20



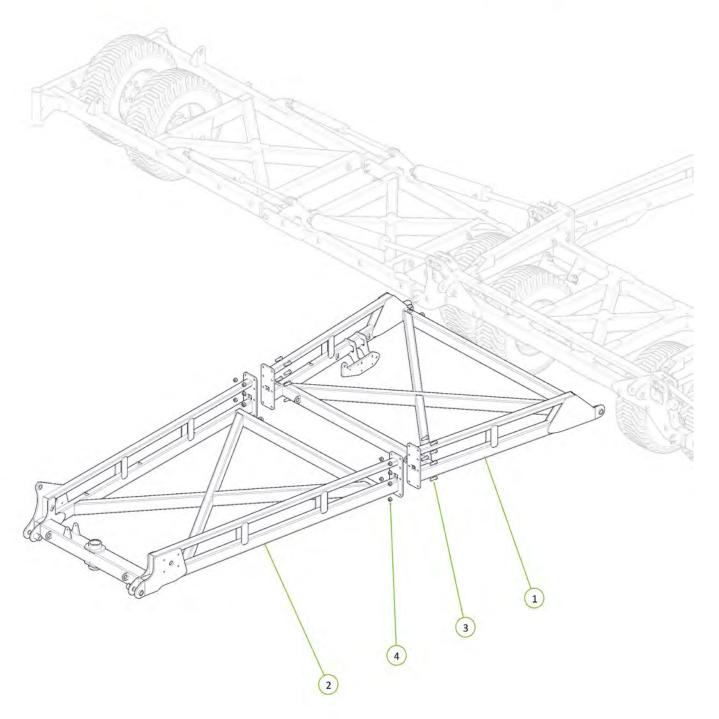


Item No.	Description	Qty	Number
1	35 ID x 30mm DU Bush	4	0113-MB 3530DU
2	PCH Wing Pivot Pin	2	0801-10-08-235
3	Cotter Pin M13 x 63	2	0261-PINC1363
4	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265
5	Nyloc Nut M12	2	0221-NYL12



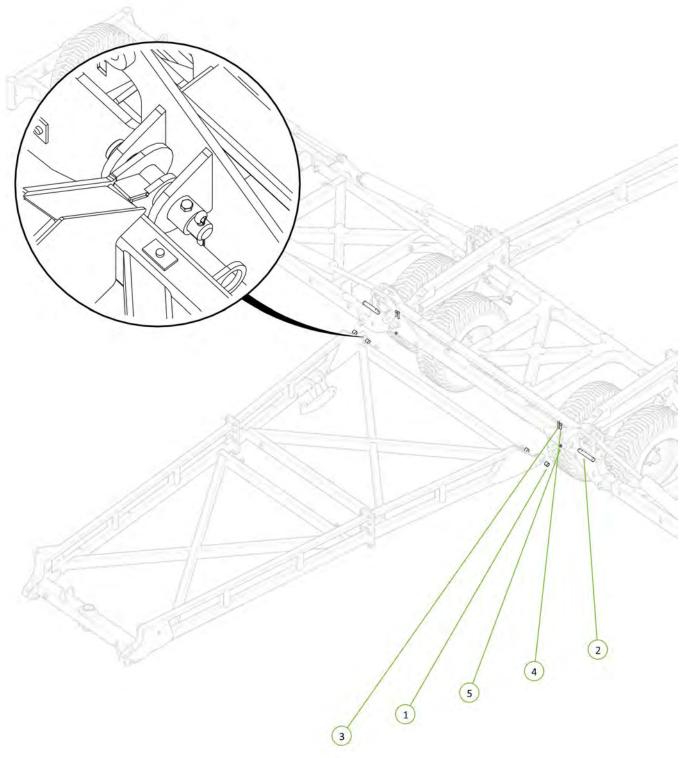


Item No.	Description	Qty	Number
1	Jockey Wheel	1	1610-11-70
2	Plain Spherical Bearing 70mm	2	0113-GE70DO-2RS
3	Circlip Internal 105mm	2	0171-J105
4	35mm Shaft Lock Clamping Element 01	1	0801-LOCK01-35
5	Brake Disc	1	0800-02.1
6	70mm Polymer dust cap	1	0801-KE0705-13
7	Grease Nipple 1/4" UNF	2	0181-GN1-4




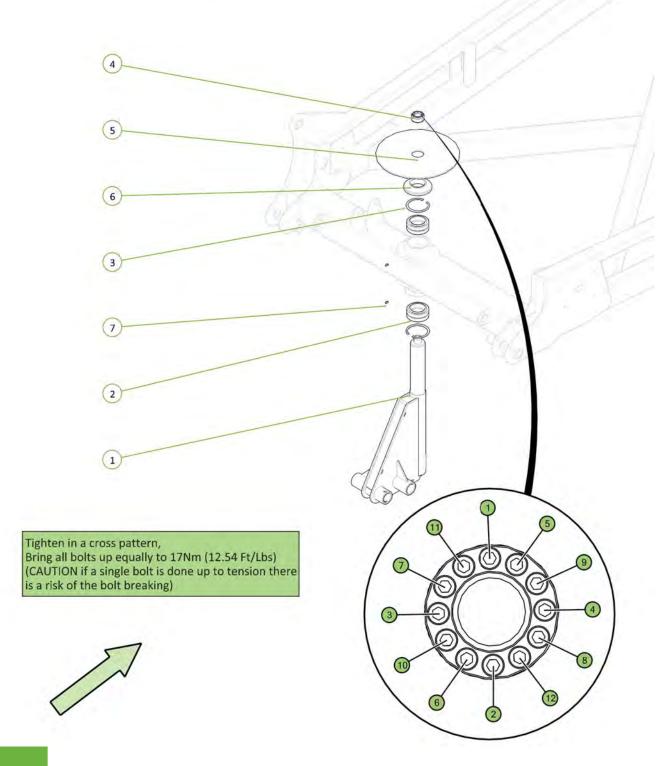

Item No.	Description	Qty	Number
1	Nyloc Nut M16	2	0221-NYL16
2	Axle 2"R 3T 6 on 6"PCD 330 OHF Complete Assembly	2	0733-K5083T66S
3	M16 x 90 grade 8.8 zp Bolt	2	0211-1690




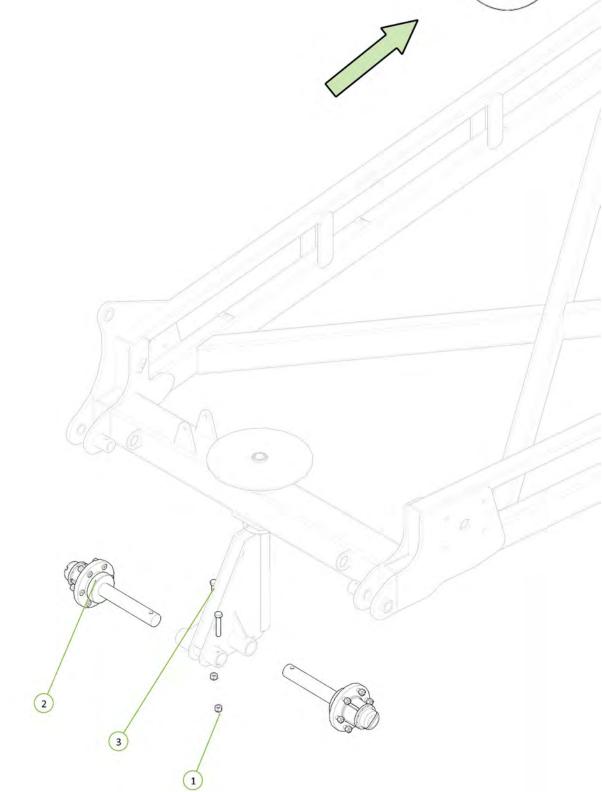


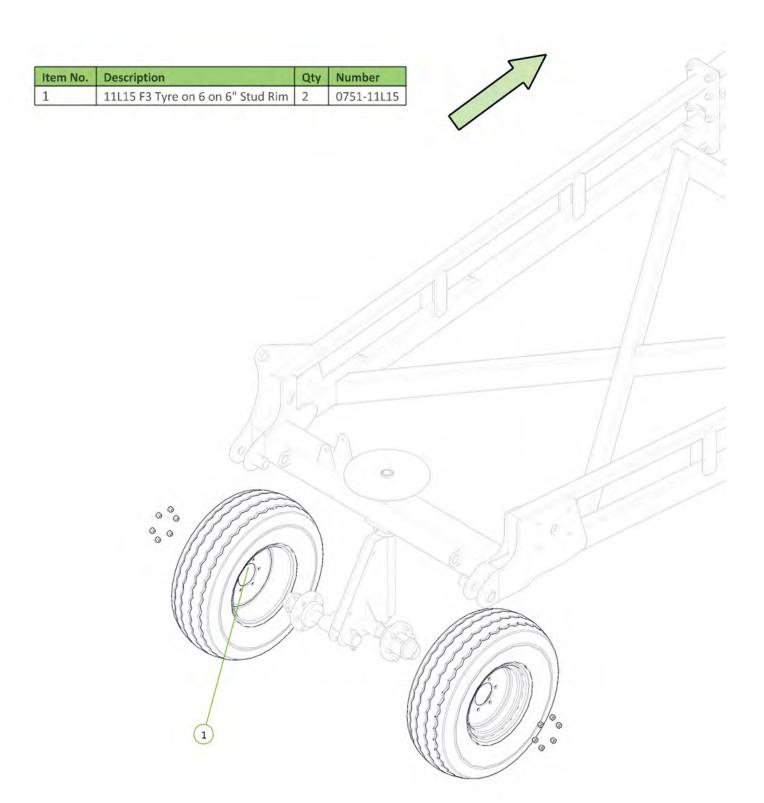


tem No.	Description	Qty	
	Jockey Wheel Brake Caliper	1	0810-12CAL
	M16 x 150 grade 8.8 zp Bolt	2	0211-16150
	Nyloc Nut M16	1	0221-NYL16
	Brake Compression Spring Washer Square M16 x 50 x 5	1	0801-KE009 0231-SQ16505
(4)			
(1			


Item No.	Description	Qty	Number
1	Rear Tail	1	1610-10S
2	35 ID x 30mm DU Bush	4	0113-MB 3530DU
3	PCH Wing Pivot Pin	2	0801-10-08-235
4	Cotter Pin M13 x 63	2	0261-PINC1363
5	M12 x 65 grade 8.8 ZP Bolt	2	0211-1265
6	Nyloc Nut M12	2	0221-NYL12



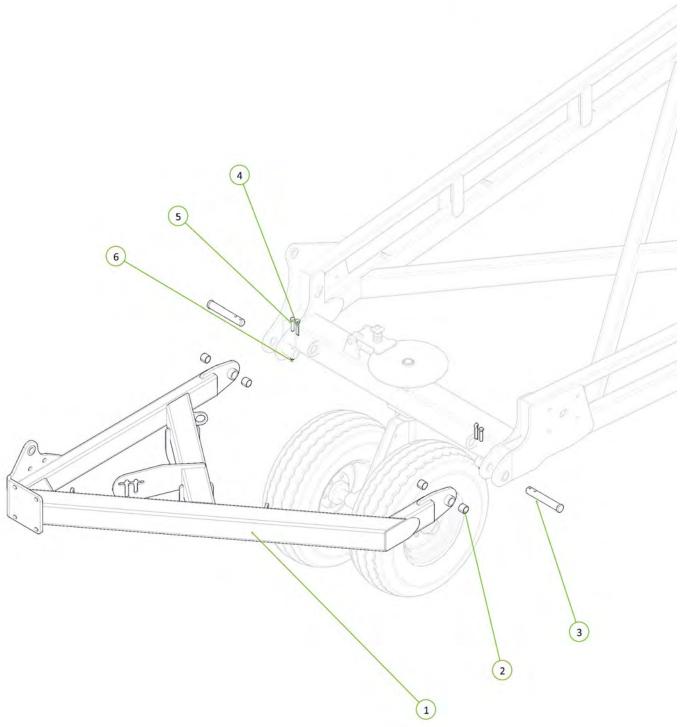


Item No.	Description	Qty	Number
1	4" Bore 24" Stroke 1.75" Rod Hydraulic Cylinder	1	0311-424




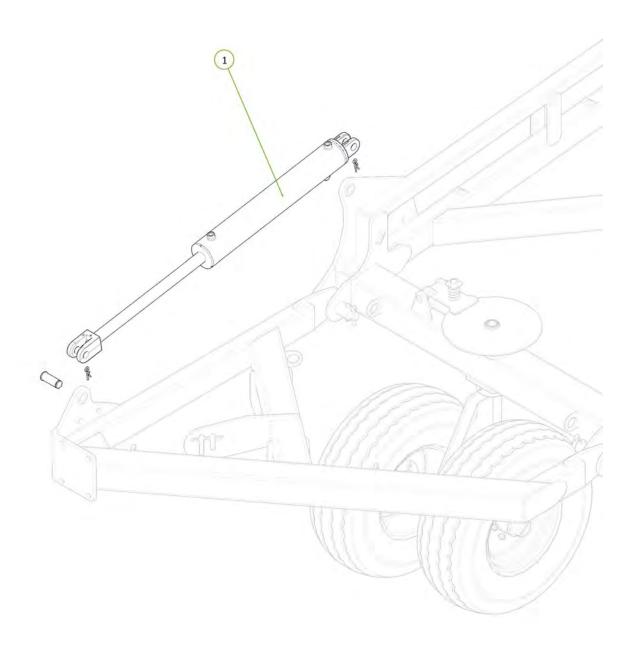



Item No.	Description	Qty	Number
1	Rear Tail Tip	1	1610-10SE
2	M20 x 60 grade 8.8 ZP Bolt	8	0211-2060
3	Nyloc Nut M20	8	0221-NYL20
4	Washer Flat M20	16	0231-F20





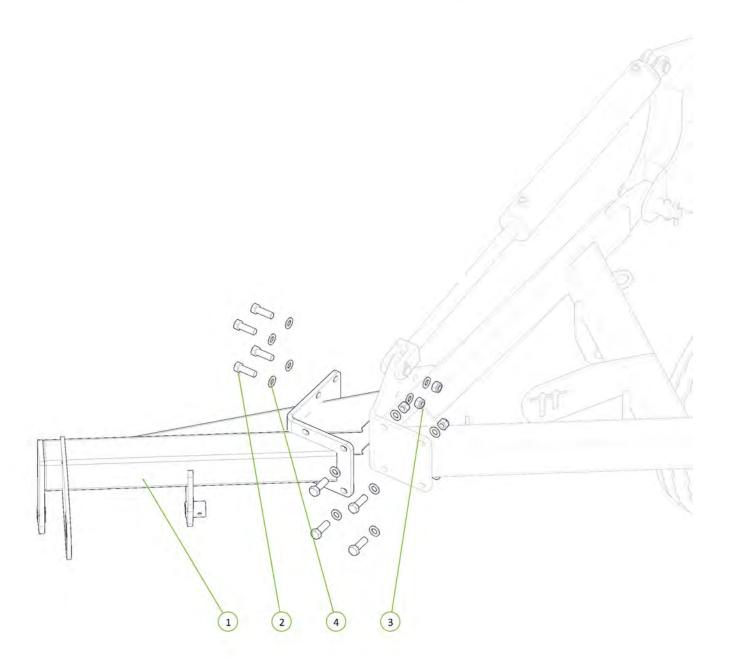


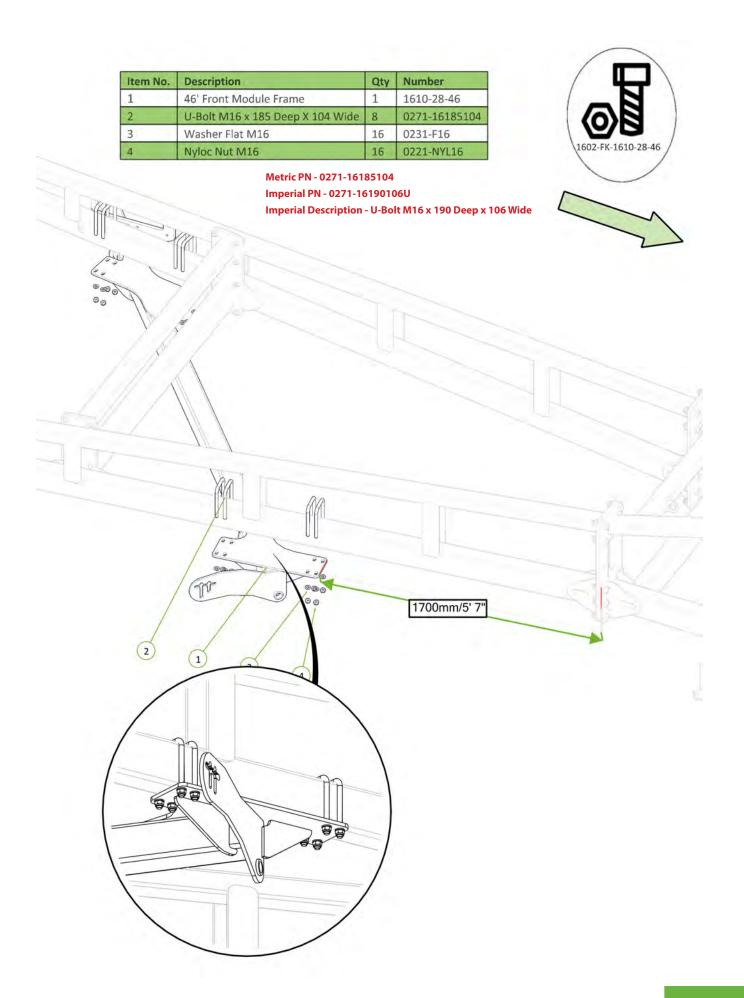

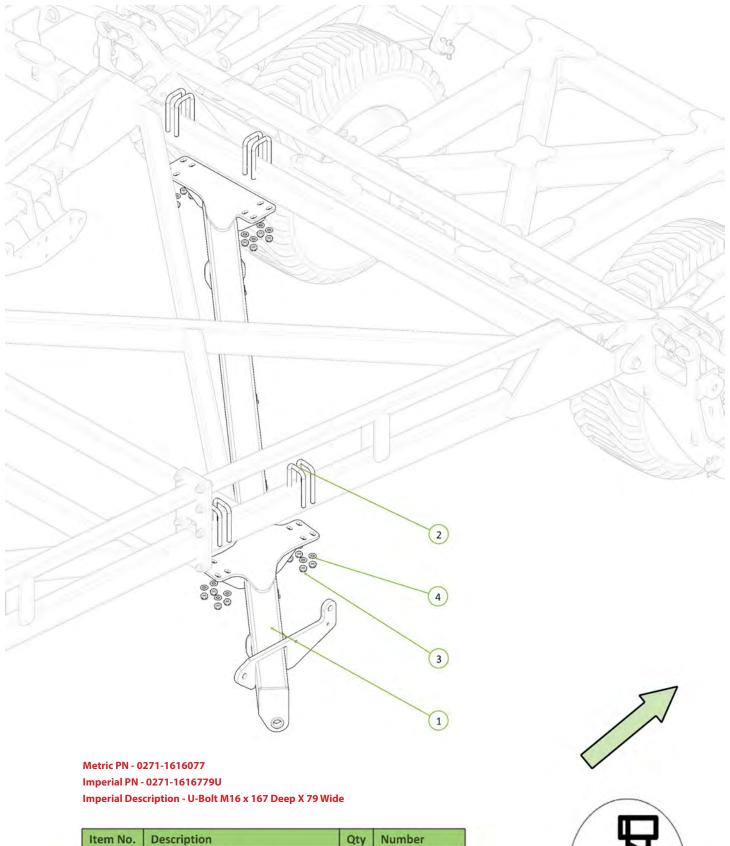


Item No.	Description	Qty	Number
1	46' Rear Module Frame	1	1610-29-46
2	U-Bolt M16 x 160 Deep X 77 Wide	8	0271-1616077
3	Nyloc Nut M16	16	0221-NYL16
4	Washer Flat M16	16	0231-F16




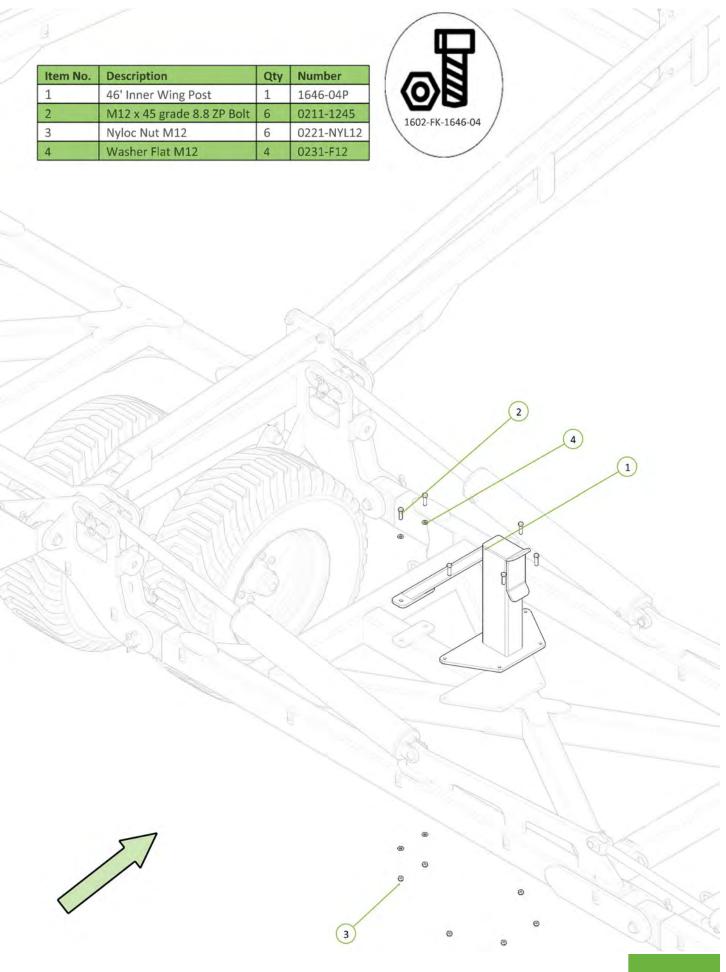

Item No.	Description	Qty	Number
1	46' Outer Wing Post	1	1646-06P
2	M12 x 40 grade 8.8 ZP Bolt	4	0211-1240
3	Nyloc Nut M12	4	0221-NYL12






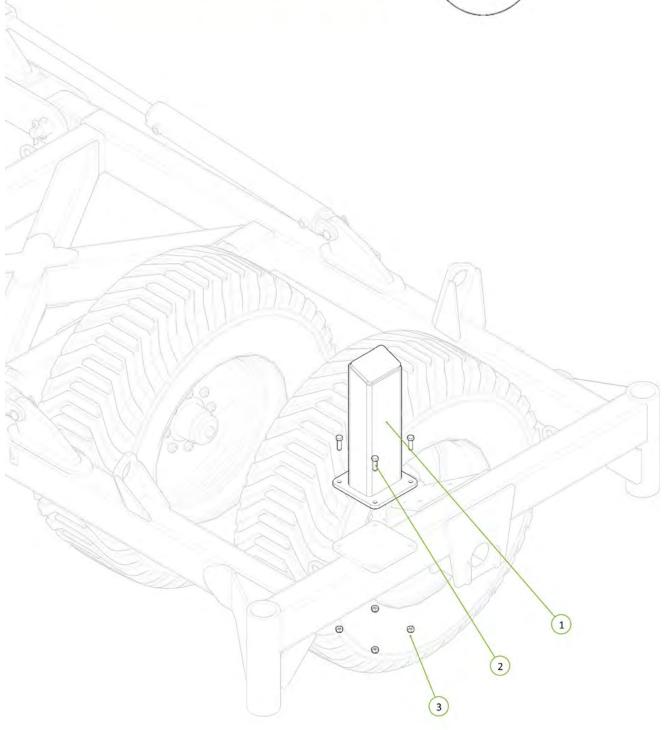



Drawbar Post Assy M8 x 20 grade 8.8 ZP Bolt 3 0211-820 Nyloc Nut M8 3 0221-NYL8	tem No.	Description	Qty	Number		/	₩	1			//	>
Nyloc Nut M8 3 0221-NYL8 1602-FK-1646-02						-	B	1		/	/	
1602-FK-1646-02		M8 x 20 grade 8.8 ZP Bolt	3	0211-820		(0)	1	1	//		
		Nyloc Nut M8	3	0221-NYL8		\	_	/		5		
					1		3					

Item No.	Description	Qty	Number
1	LH Dropleg No Clevis	1	0810-24F
2	RH Dropleg No Clevis	1	0810-25F
3	LH Chain Adjusting Lug	1	0810-26
4	RH Chain Adjusting Lug	1	0810-27
5	Forged Clevis 21mm Bolt Hole	2	0801-FC21
6	Stainless Steel Wear Bush	2	1501-365033-SS
7	M36 x 105 grade 8.8 ZP Bolt	2	0211-36105
8	M24 x 140 grade 8.8 zp Bolt	2	0211-24140
9	Nyloc Nut M24	2	0221-NYL24
10	Nyloc Nut M36	2	0221-NYL36







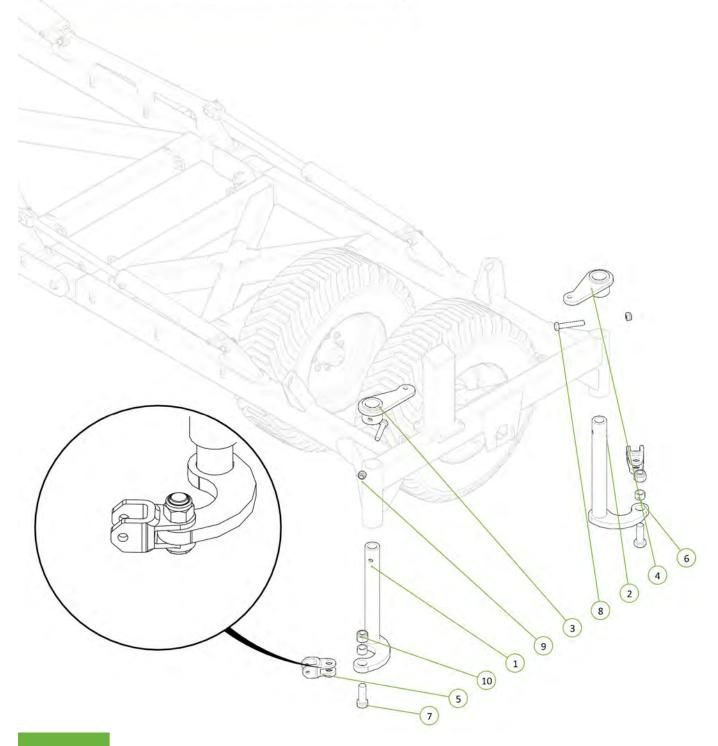

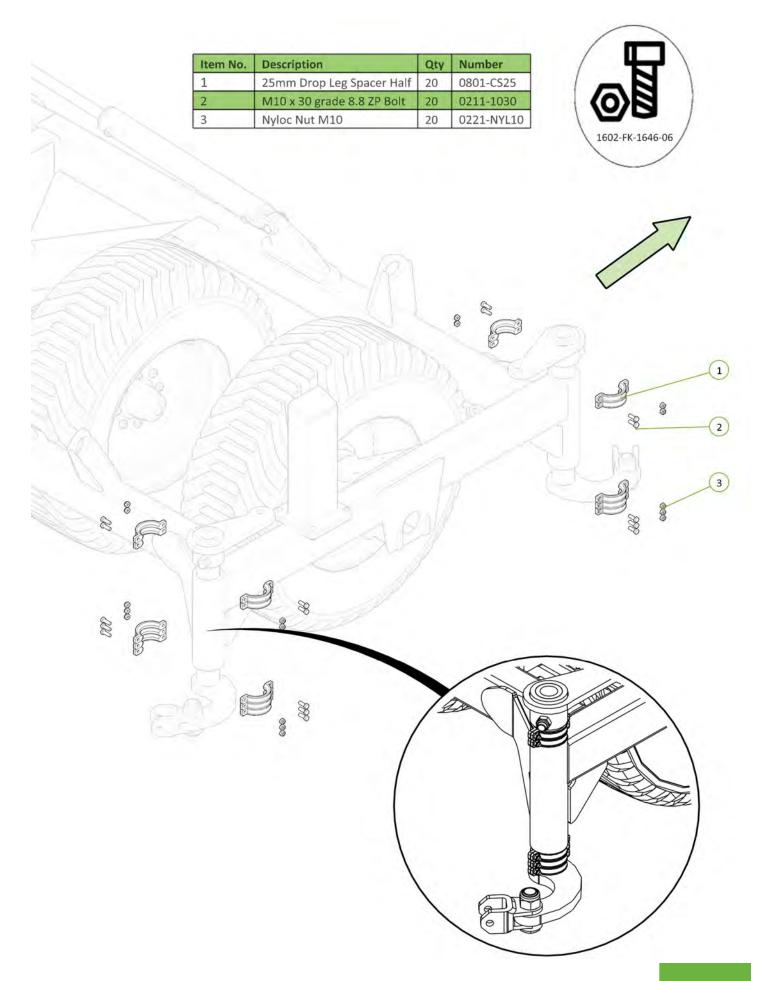

Item No.	Description	Qty	Number
1	Chain Tension Adjustor	2	0802-PCHTA
2	WASHER HIGH TENSILE 1 1/4"	2	0232-HT11-4
3	20mm Compression Spring, Black	2	0801-XK9261S
4	Tensioner Cup - Male	2	0801-KE0805-3
5	Tensioner Cup-Female	2	0801-KE0805-4




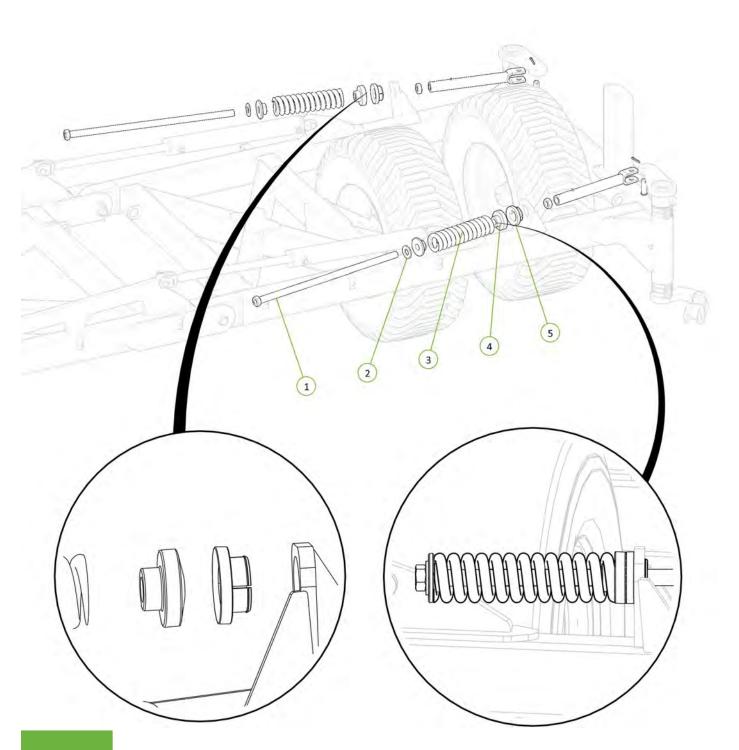


RH C	opleg No Clevis	Qty	Number
RH C		1	0810-24F
	ropleg No Clevis	1	0810-25F
LH C	nain Adjusting Lug	1	0810-27
	ain Adjusting Lug	1	0810-26
	ess Steel Wear Bush	2	1501-365033
	d Clevis 21mm Bolt Hole		0801-FC21
	x 105 grade 8.8 ZP Bolt	2	0211-36105
	x 140 grade 8.8 zp Bolt	2	0211-24140
	Nut M24	2	0221-NYL24
Nylo	: Nut M36	2	0221-NYL36
		1 A 1	


Item No.	Description	Qty	Number
1	25mm Drop Leg Spacer Half	20	0801-CS25
2	M10 x 30 grade 8.8 ZP Bolt	20	0211-1030
3	Nyloc Nut M10	20	0221-NYL10







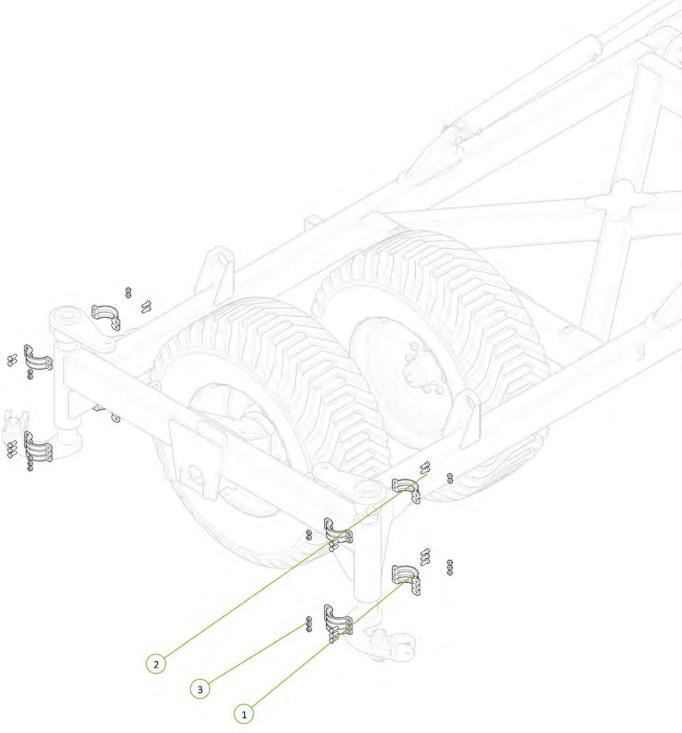



Item No.	Description	Qty	Number
1	Chain Tension Adjustor	2	0802-PCHTA
2	WASHER HIGH TENSILE 1 1/4"	2	0232-HT11-4
3	20mm Compression Spring, Black	2	0801-XK9261S
4	Tensioner Cup - Male	2	0801-KE0805-3
5	Tensioner Cup-Female	2	0801-KE0805-4



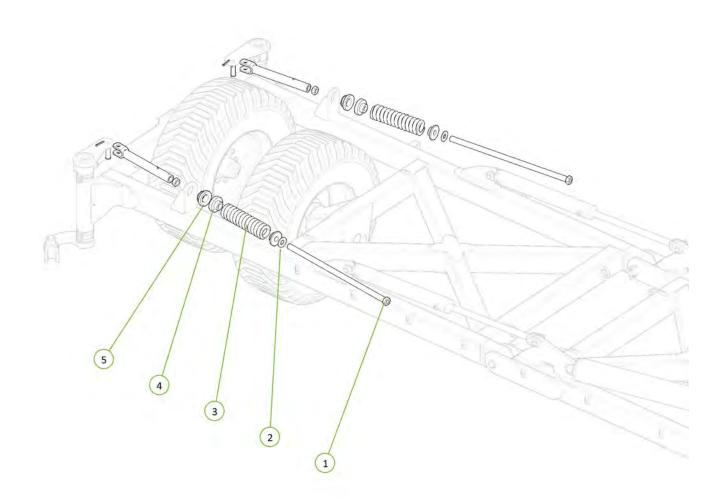


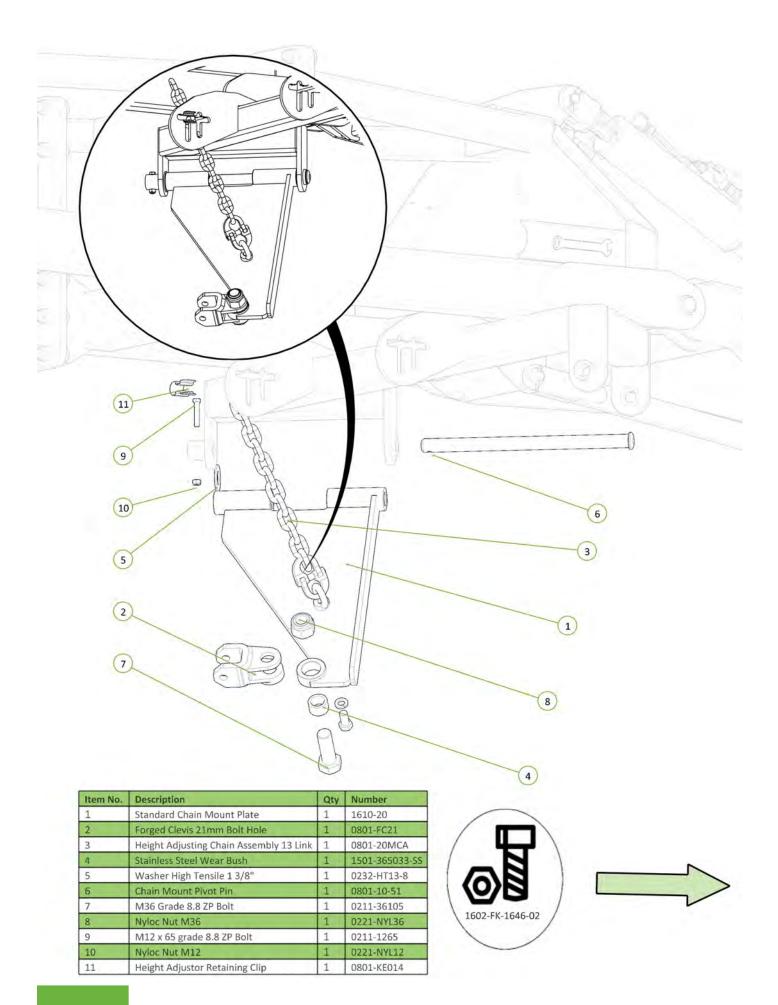


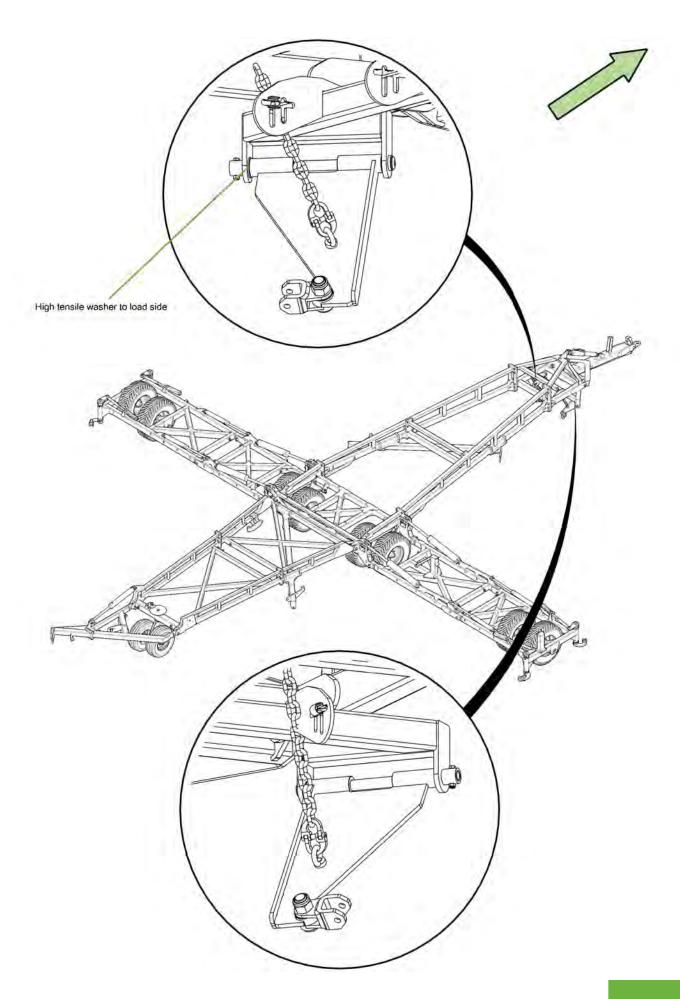


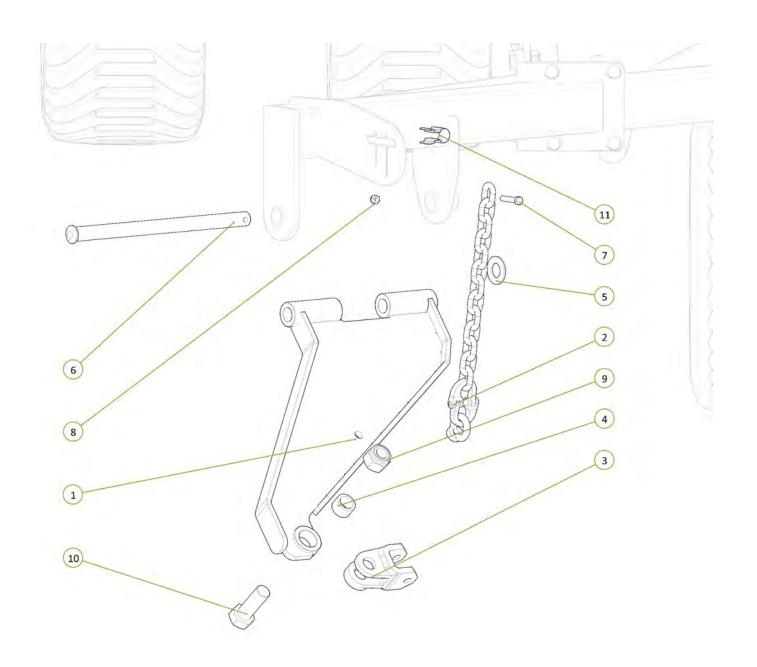


Item No.	Description	Qty	Number
1	Extended Chain Mount Plate	1	1610-21
2	Height Adjusting Chain Assembly 13 Link	1	0801-20MCA
3	Forged Clevis 21mm Bolt Hole	1	0801-FC21
4	Stainless Steel Wear Bush	1	1501-365033-SS
5	Washer High Tensile 1 3/8"	1	0232-HT13-8
6	Chain Mount Pivot Pin	1	0801-10-51
7	M12 x 65 grade 8.8 ZP Bolt	1	0211-1265
8	Nyloc Nut M12	1	0221-NYL12
9	Nyloc Nut M36	1	0221-NYL36
10	M36 x 105 grade 8.8 zp Bolt	1	0211-36105
11	Height Adjustor Retaining Clip	1	0801-KE014




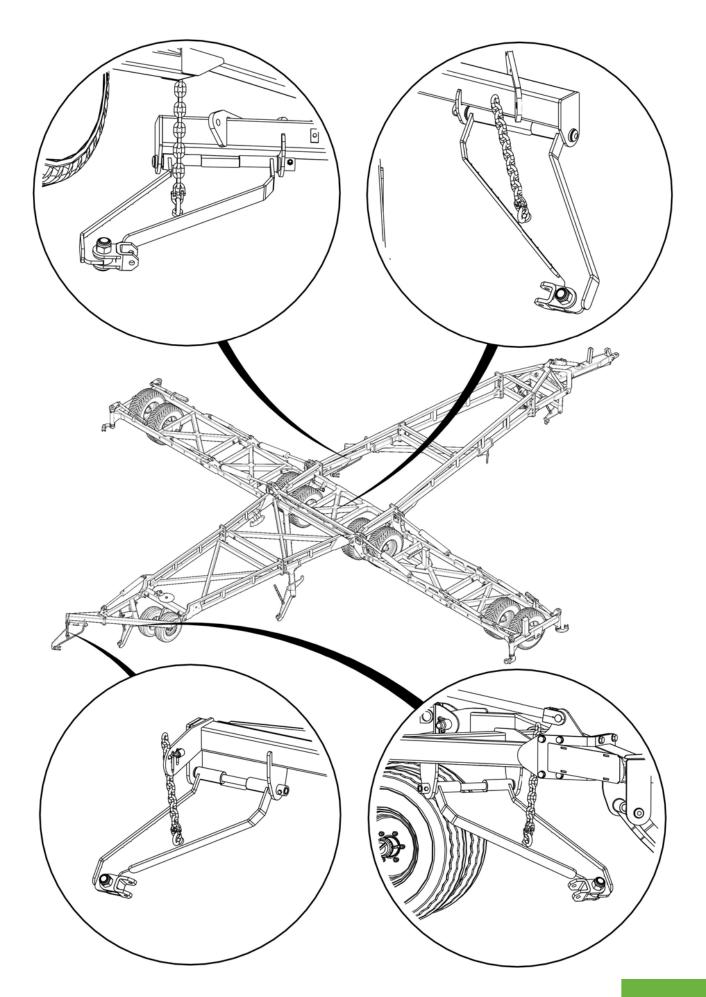

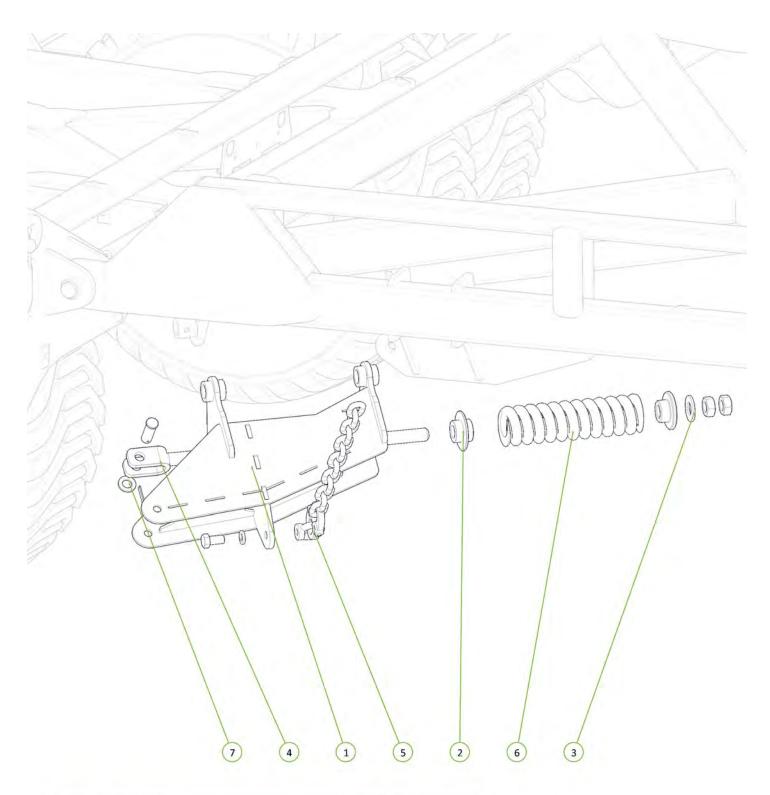



Item No.	Description	Qty	Number
1	Front Module Tension Body	1	0810-103F
2	Rigid Spring Locator	1	0801-10-S2L
3	Washer High Tensile 1 1/4"	1	0232-HT11-4
4	Module Tension Rod Assembly	1	0810-105A
5	Height Adjusting Chain Assembly 13 Link	1	0801-20MCA
6	Heavy Duty Coil Spring 24mm	1	0801-K2455350
7	Washer Flat M24	1	0231-F24



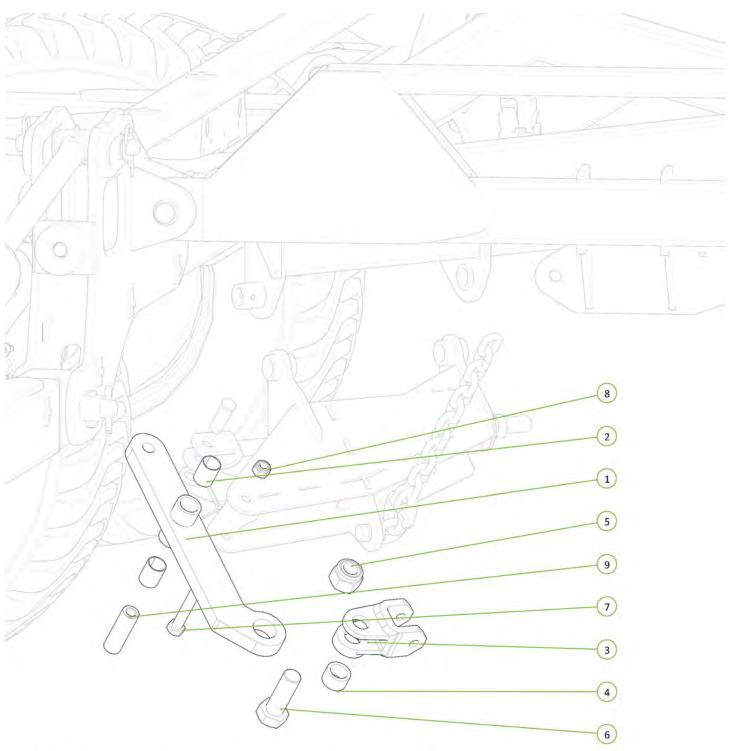


Item No.	Description	Qty	Number
1	Module Tension Arm	1	0810-104
2	35 ID x 50mm DU Bush	2	0113-MB 3550DU
3	Forged Clevis 21mm Bolt Hole	1	0801-FC21
4	Stainless Steel Wear Bush	1	1501-365033-SS
5	Nyloc Nut M36	1	0221-NYL36
6	M36 x 105 grade 8.8 zp Bolt	1	0211-36105
7	M20 x 150 grade 8.8 ZP Bolt	1	0211-20150
8	Nyloc Nut M20	1	0221-NYL20
9	Module Pivot Arm Bush	1	0801-10-110




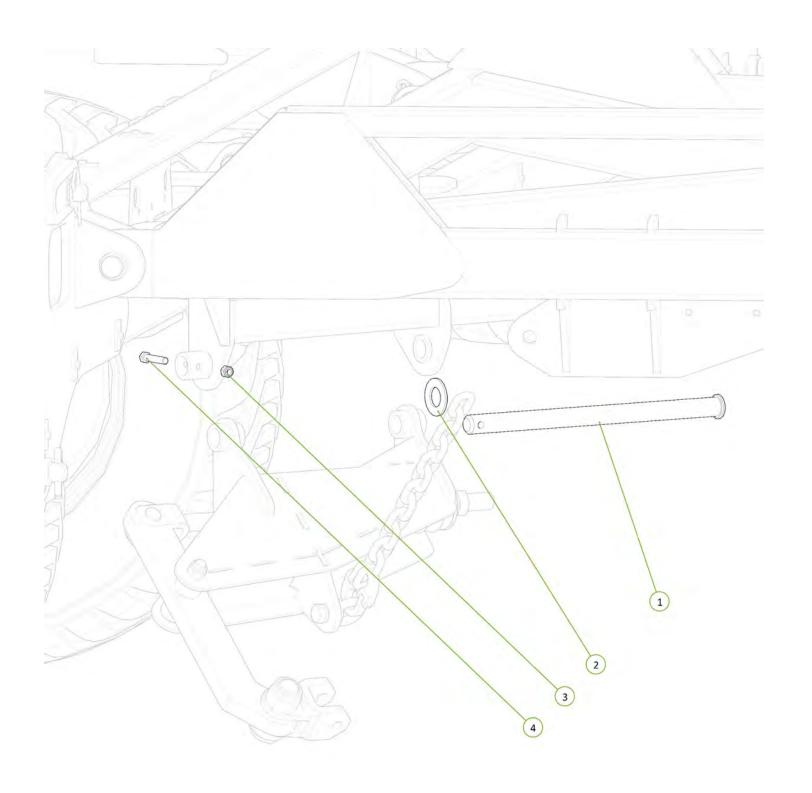


Item No.	Description	Qty	Number
1	Chain Mount Pivot Pin	1	0801-10-51
2	Washer High Tensile 1 3/8"	1	0232-HT13-8
3	Nyloc Nut M12	1	0221-NYL12
4	M12 x 65 grade 8.8 ZP Bolt	1	0211-1265






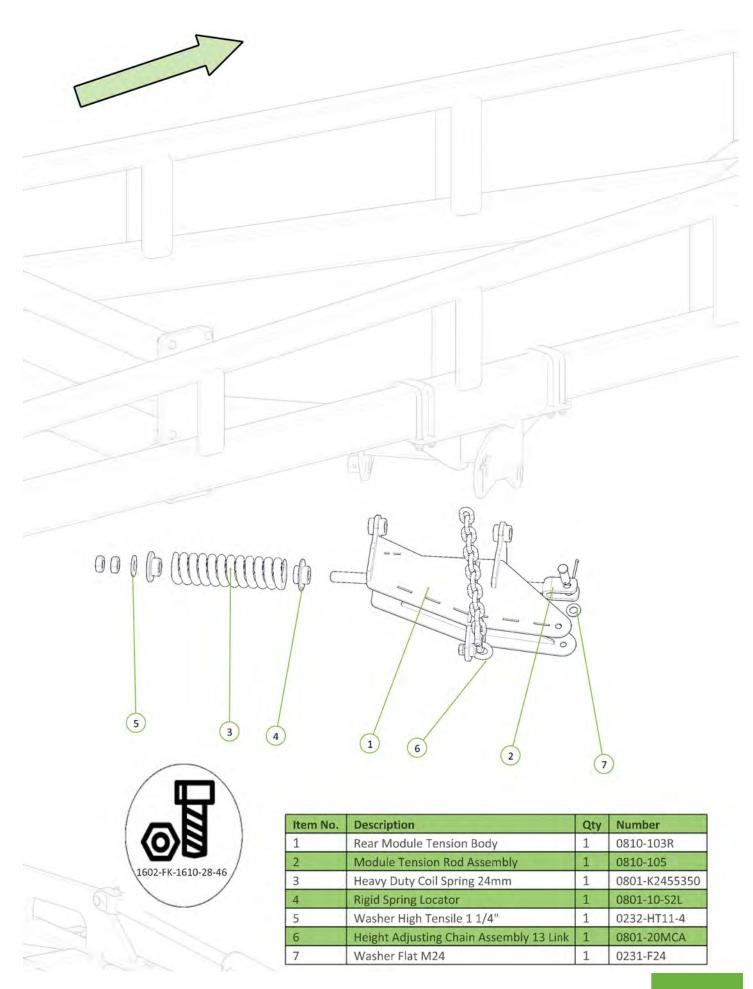


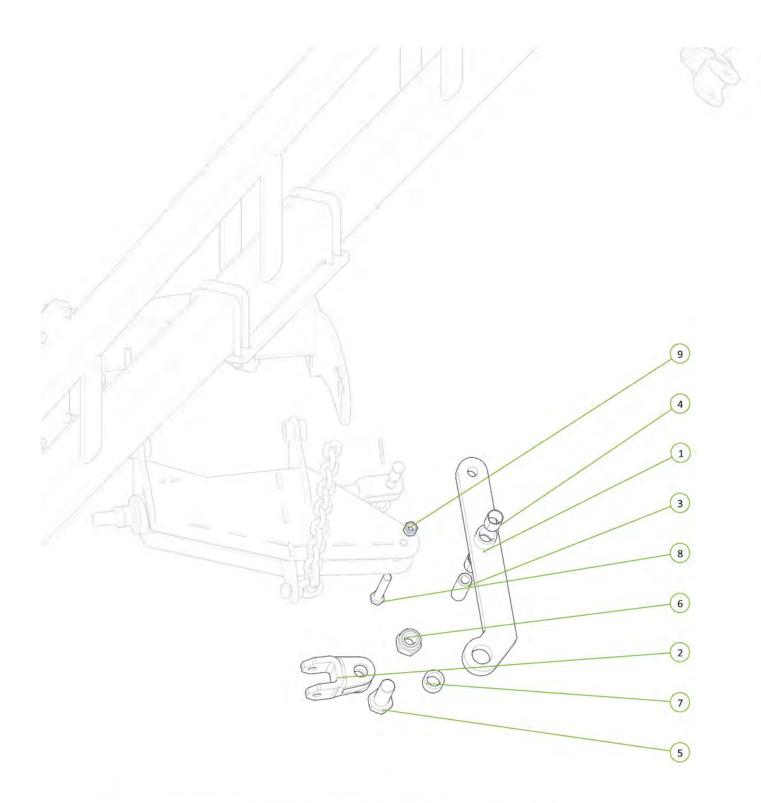


Item No.	Description	Qty	Number
1	Module Tension Arm	1	0810-104
2	Forged Clevis 21mm Bolt Hole	1	0801-FC21
3	Module Pivot Arm Bush	1	0801-10-110
4	35 ID x 50mm DU Bush	2	0113-MB 3550DU
5	M36 x 105 grade 8.8 zp Bolt	1	0211-36105
6	Nyloc Nut M36	1	0221-NYL36
7	Stainless Steel Wear Bush	1	1501-365033-SS
8	M20 x 150 grade 8.8 ZP Bolt	1	0211-20150
9	Nyloc Nut M20	1	0221-NYL20







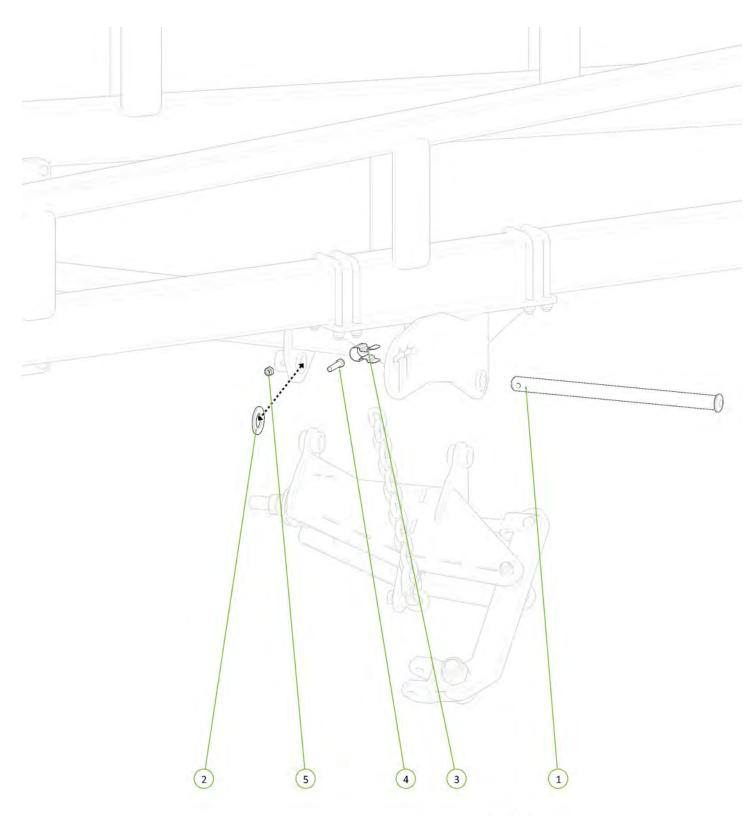


Item No.	Description	Qty	Number
1	Chain Mount Pivot Pin	1	0801-10-51
2	Washer High Tensile 1 3/8"	1	0232-HT13-8
3	Height Adjustor Retaining Clip	1	0801-KE014
4	M12 x 65 grade 8.8 ZP Bolt	1	0211-1265
5	Nyloc Nut M12	1	0221-NYL12



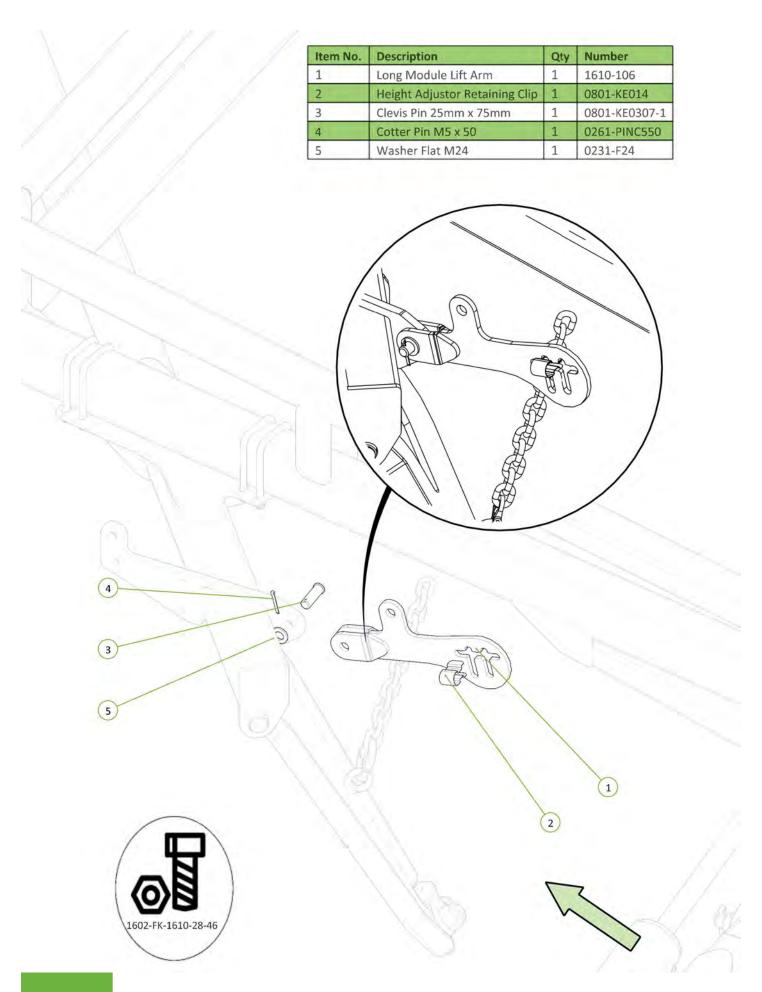


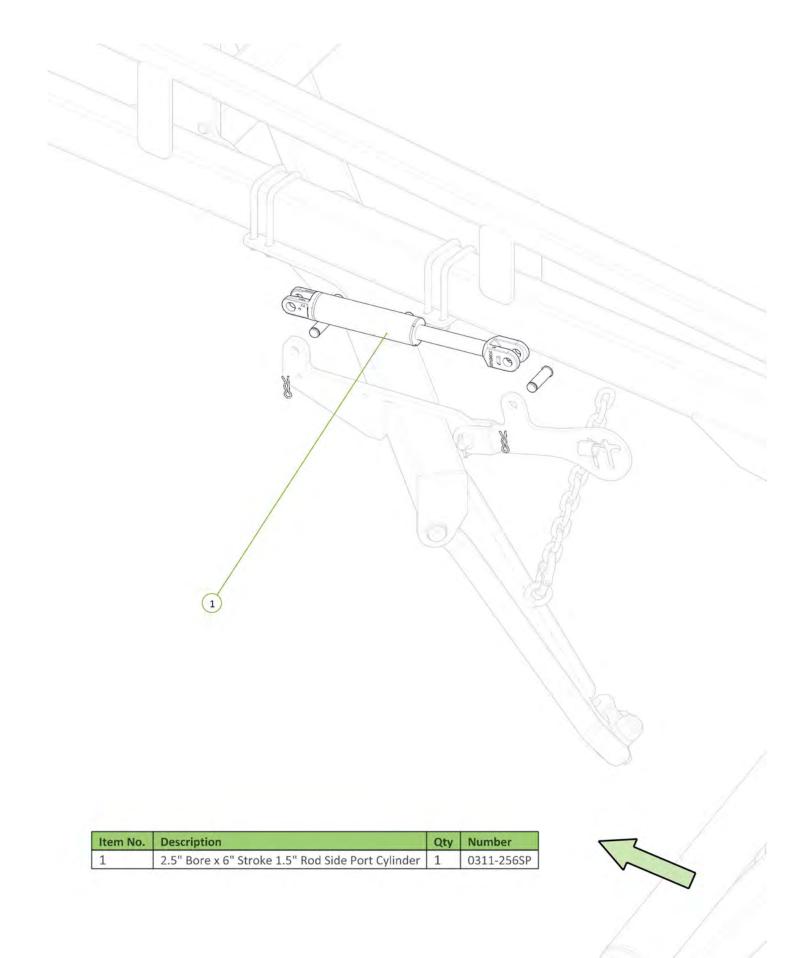


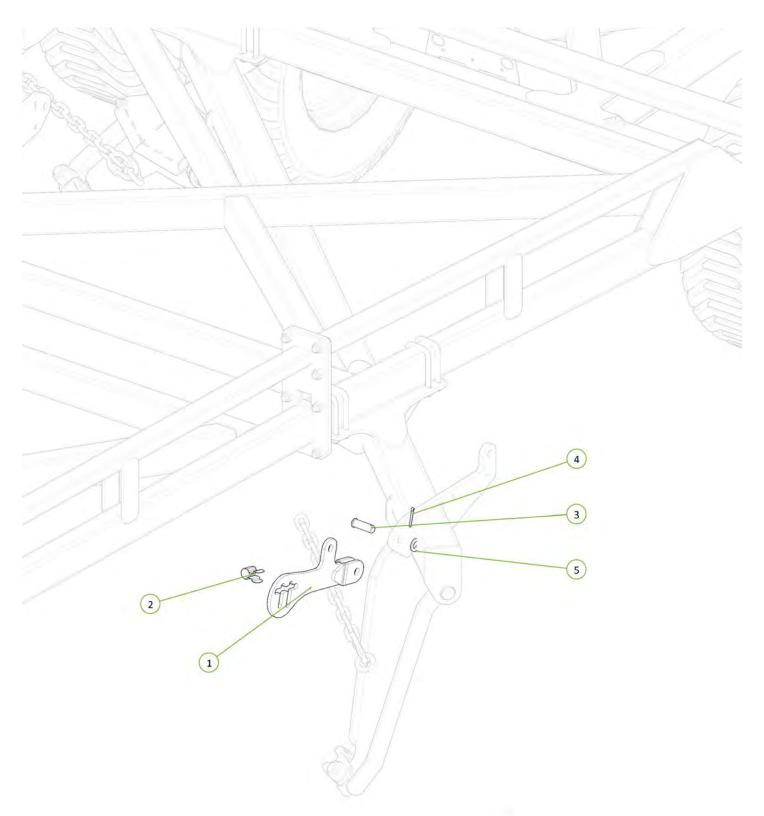


Item No.	Description	Qty	Number
1	Long Module Lift Arm	1	1610-106
2	Height Adjustor Retaining Clip	1	0801-KE014
3	Clevis Pin 25mm x 75mm	1	0801-KE0307-1
4	Cotter Pin M5 x 50	1	0261-PINC550
5	Washer Flat M24	1	0231-F24





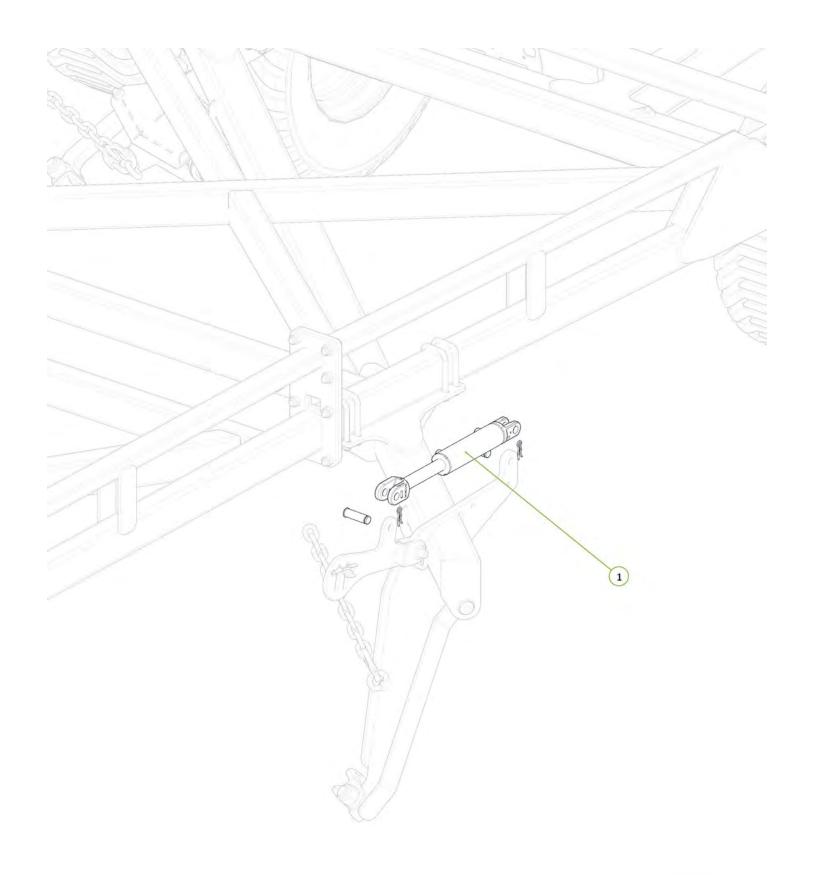


Item No.	Description	Qty	Number
1	2.5" Bore x 6" Stroke 1.5" Rod Side Port Cylinder	1	0311-256SP





Item No.	Description	Qty	Number
1	Short Module Lift Arm	1	1610-107
2	Height Adjustor Retaining Clip	1	0801-KE014
3	Clevis Pin 25mm x 75mm	1	0801-KE0307-1
4	Cotter Pin M5 x 50	1	0261-PINC550
5	Washer Flat M24	1	0231-F24



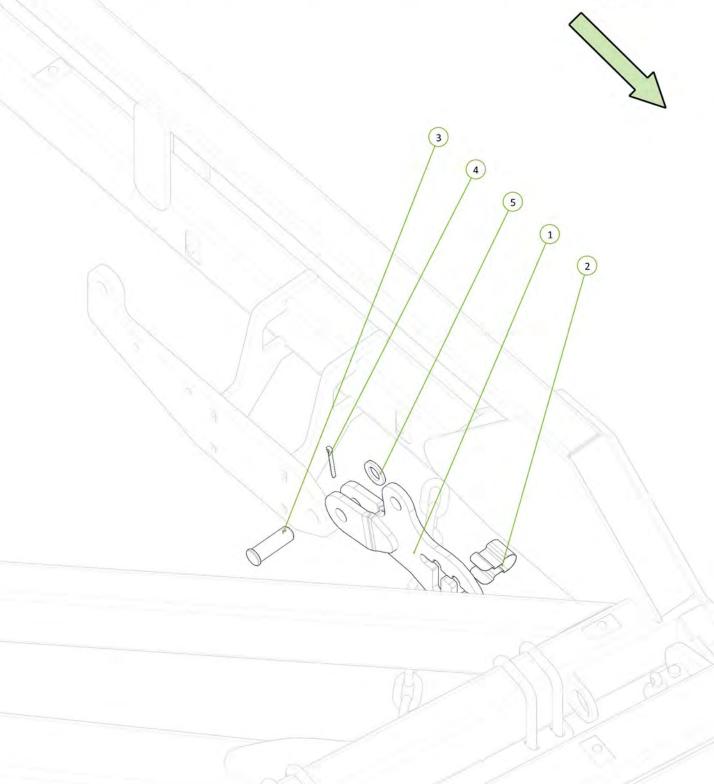

Item No.	Description	Qty	Number
1	2.5" Bore x 6" Stroke 1.5" Rod Side Port Cylinder	1	0311-256SP



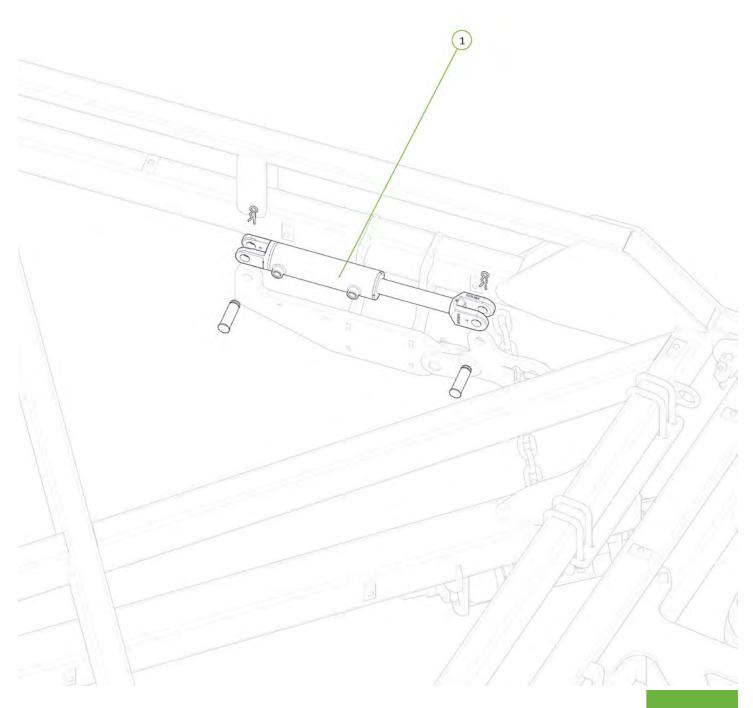


Metric PN - 0271-16112104


Imperial PN - 0271-16114106U


Imperial Description - U-Bolt M16 x 114 Deep x 106 Wide



Imperial PN - 0271-16162129U

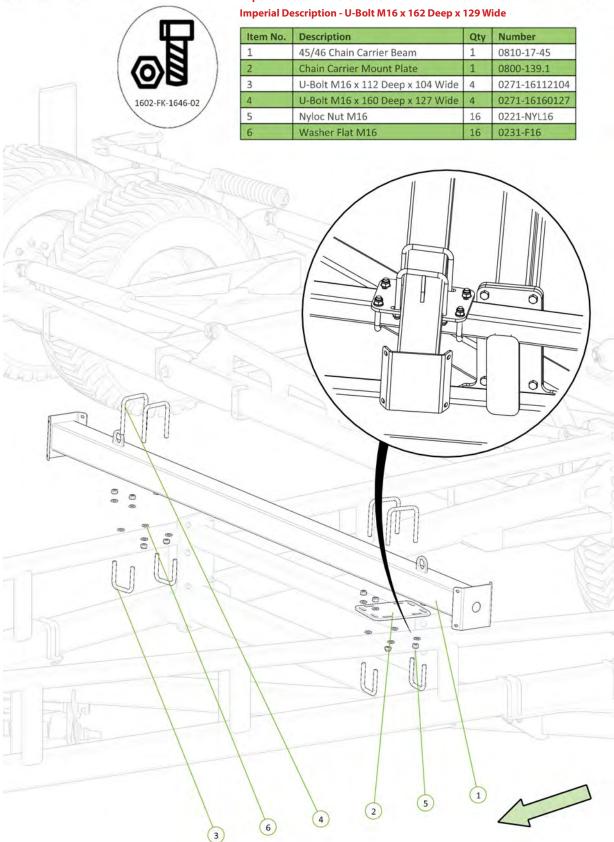

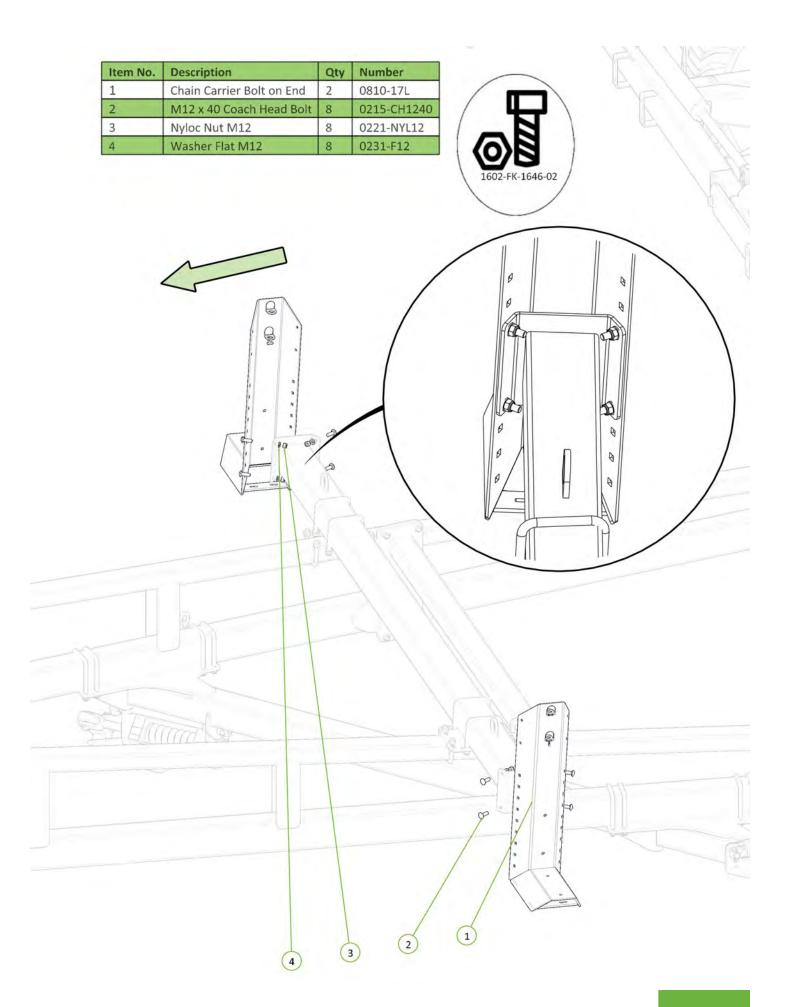

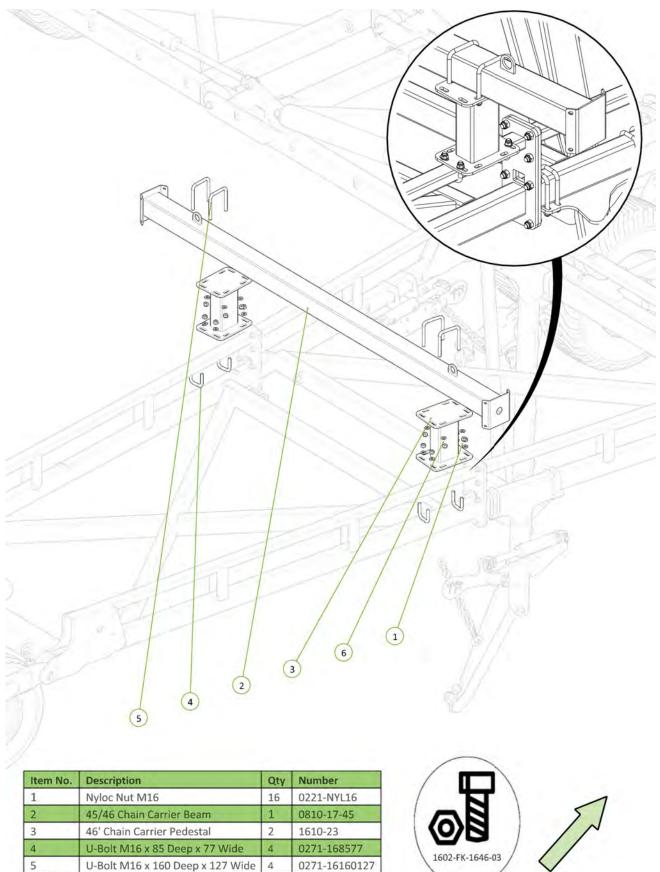

16

0231-F16

Metric PN - 0271-168577 Imperial PN - 0271-168779U

Imperial Description - U-Bolt M16 x 87 Deep x 79 Wide


Washer Flat M16






Metric PN - 0271-16160127 Imperial PN - 0271-16162129U


Imperial Description - U-Bolt M16 x 162 Deep x 129 Wide

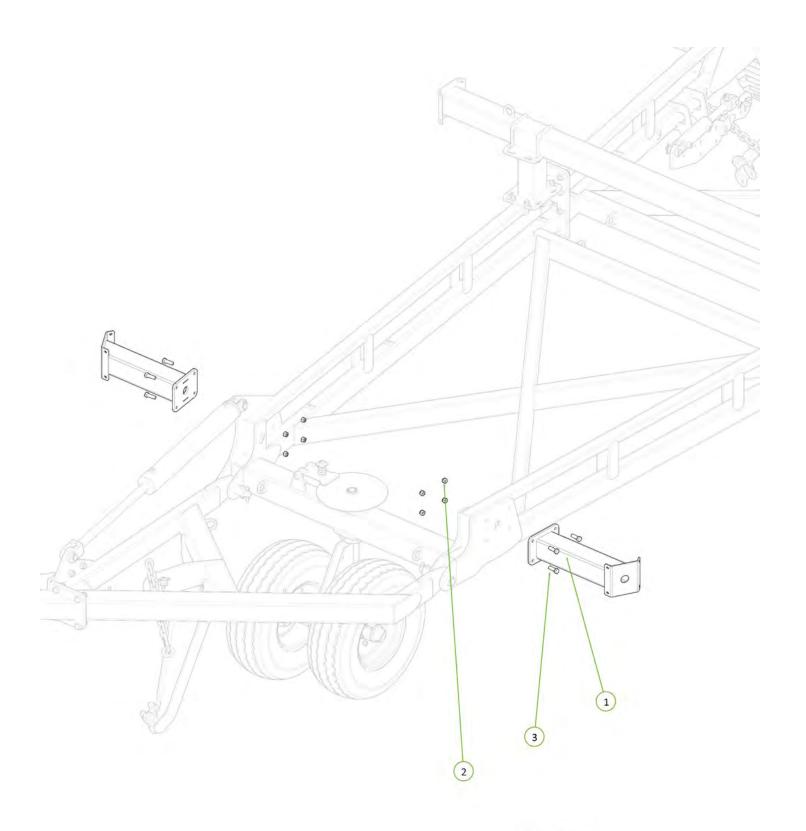


Item No.	Description	Qty	Number
1	46 Outrigger	2	1610-109
2	Nyloc Nut M16	8	0221-NYL16
3	M16 x 50 grade 8.8 zp Bolt	8	0211-1650





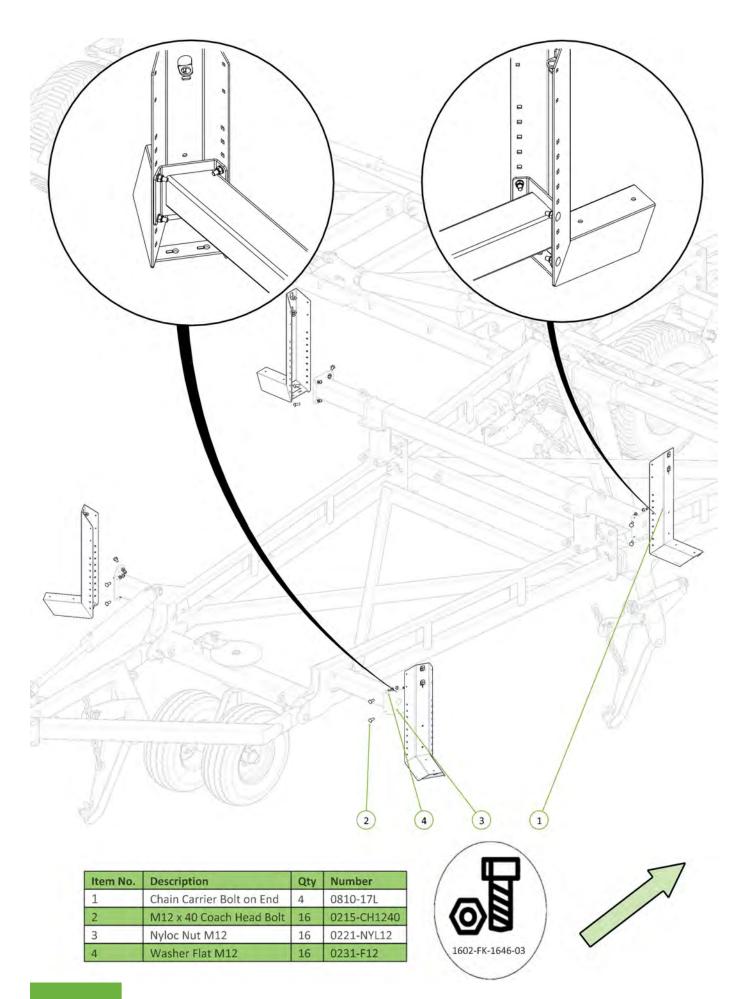



Item No.	Description	Qty	Number
1	Rignt Hand Off Set M	1	0810-18R
2	U-Bolt M12 x 105 Deep x 104 Wide	4	0271-12105104
3	Left Hand Off Set M	1	0810-19L
4	Round Tube Insert 60.3 x 3.2-5mm	4	0264-RTRi-5584
5	Nyloc Nut M12	8	0221-NYL12
6	Washer Flat M12	8	0231-F12



Metric PN - 0271-12105104 Imperial PN - 0271-12107106U


Imperial Description - U-Bolt M12 x 107 Deep x 106 Wide

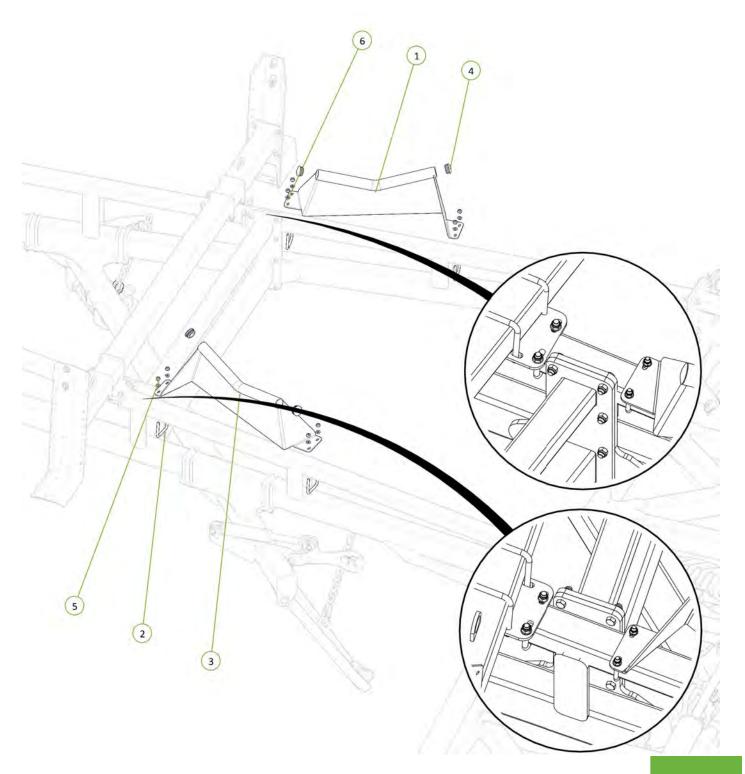

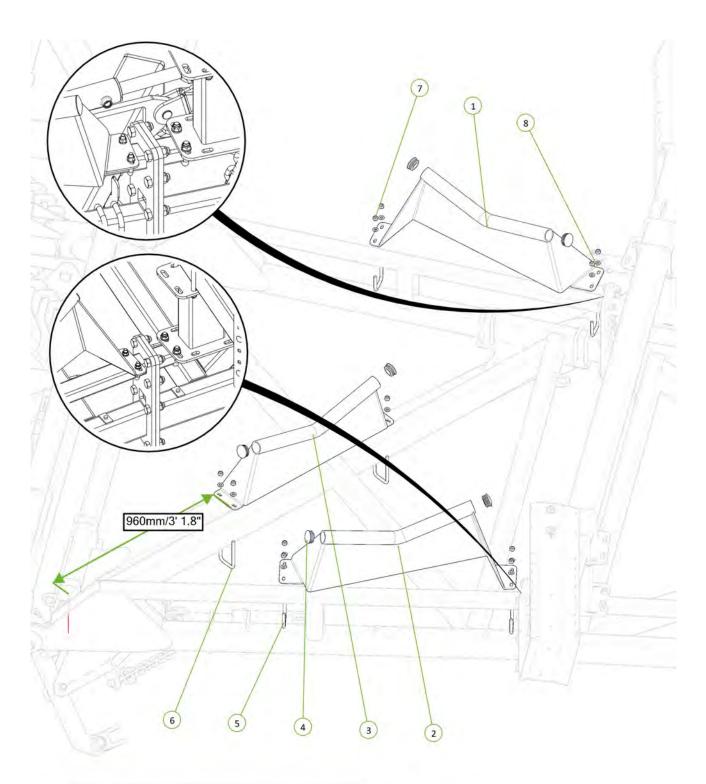


Item No.	Description	Qty	Number
1	Left Hand Off Set M	1	0810-19L
2	Right Hand Off Set M	1	0810-18R
3	Rear M	1	0810-19
4	Round Tube Insert 60.3 x 3.2-5mm	6	0264-RTRi-5584
5	U-Bolt M12 x 80 Deep x 77 Wide	4	0271-128077
6	U-Bolt M12 x 155 Deep x 77 Wide	2	0271-1215577
7	Nyloc Nut M12	12	0221-NYL12
8	Washer Flat M12	12	0231-F12






Metric PN - 0271-128077 Imperial PN - 0271-128279U


Imperial Description - U-Bolt M12 x 82 Deep x 79 Wide

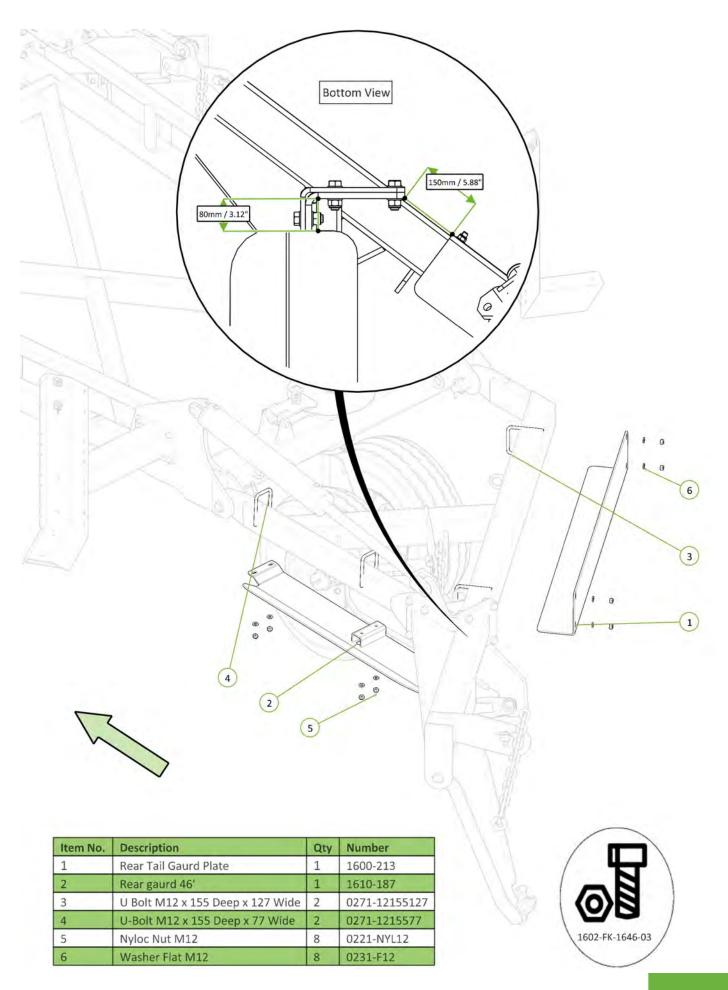


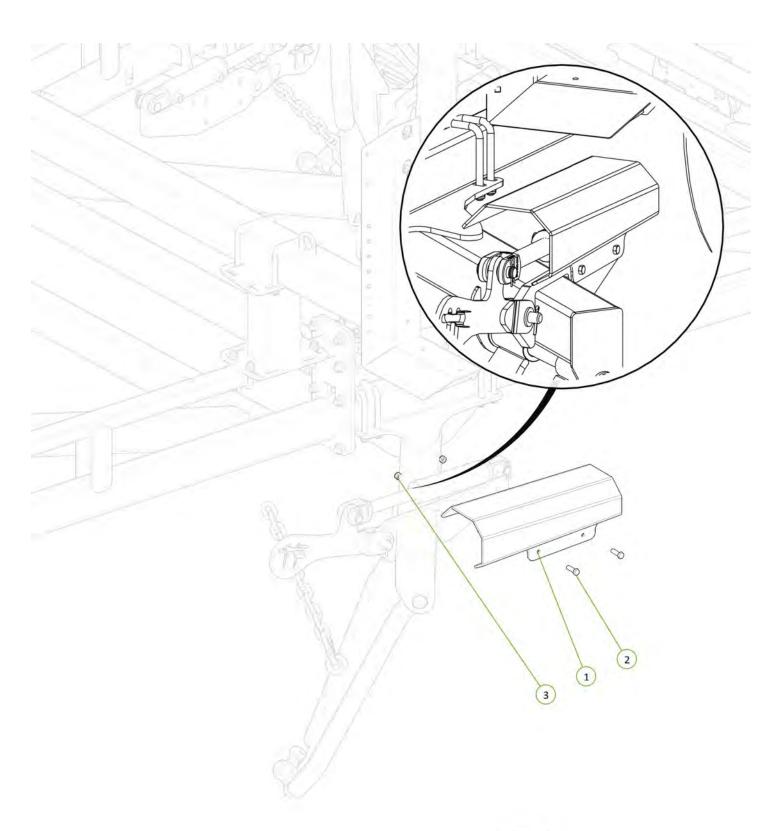

Item No.	. Description		Number		
1	Module Cylinder Guard	1	0800-167.3		
2	M12 x 40 grade 8.8 ZP Bolt	2	0211-1240		
3	Nyloc Nut M12	2	0221-NYL12		






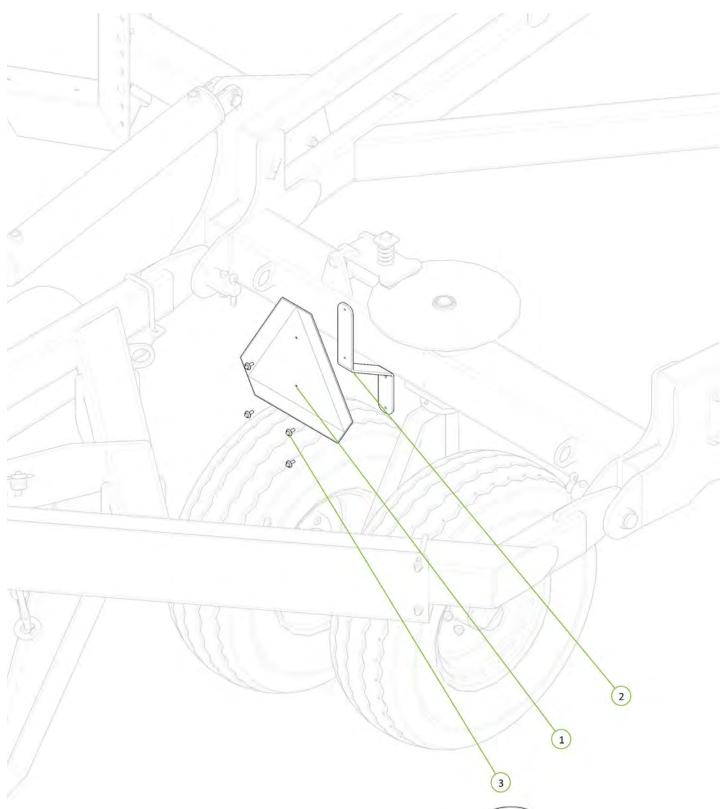


Item No.	Description	Qty	Number
1	Slow Moving Vehical Sign	1	0801-FBSMVTUF
2	SMV Sign Bracket - Fold	1	0800-195.1
3	M6 x 20 Trilobe self tapping Scew	4	0211-M620MZPHTF







Item No.	Description	Qty	Number
1	Operator Manual Cannister	1	0801-OMC-1
2	M8 x 25 grade 8.8 ZP Bolt	3	0211-825
3	Nyloc Nut M8	3	0221-NYL8
4	Gear Wrench 1 3/4"	1	0802-GW1 3-4
5	Washer Flat M8	6	0231-F8



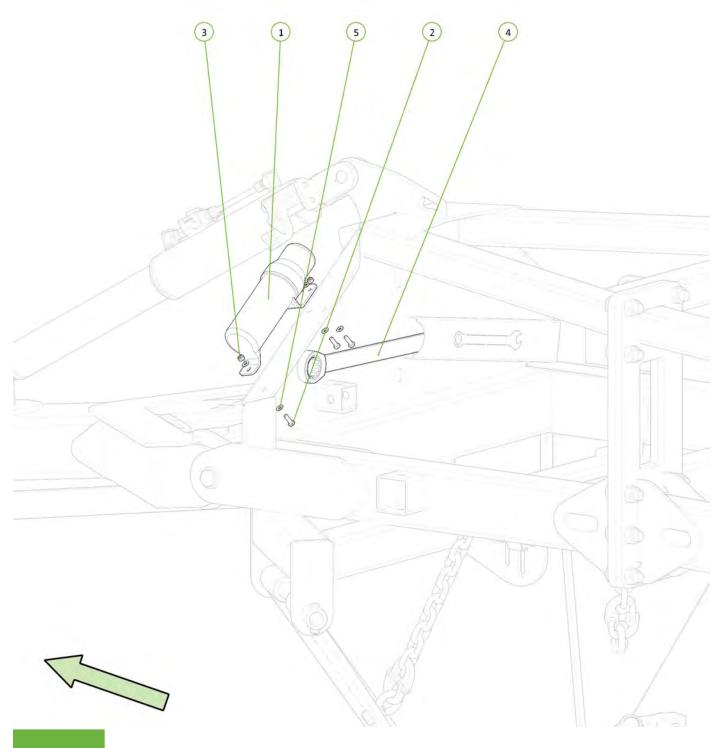



Item No.	Description	Qty	Number
1	Heavy Duty Jack Assembly	1	0810-37A
2	20mm Bolt Swivel Unit	1	0802-PCHB55
3	M20 x 110 grade 10.9 ZP Short Thread Bolt	1	0211-20110 ST
4	Nyloc Nut M20	1	0221-NYL20



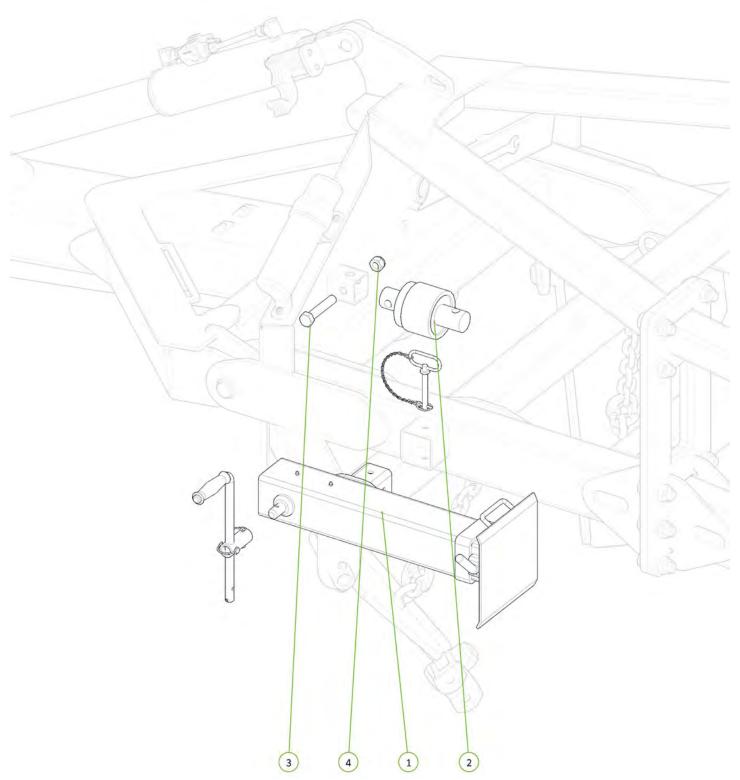



Item No.	Description	Qty	Number
1	Safety Chain Assembly	1	0810-16
2	Cylinder Safety Stop	1	0800-212.1
3	Square Loop Pin M8 x 63	1	0511-PINLOOPSQ863




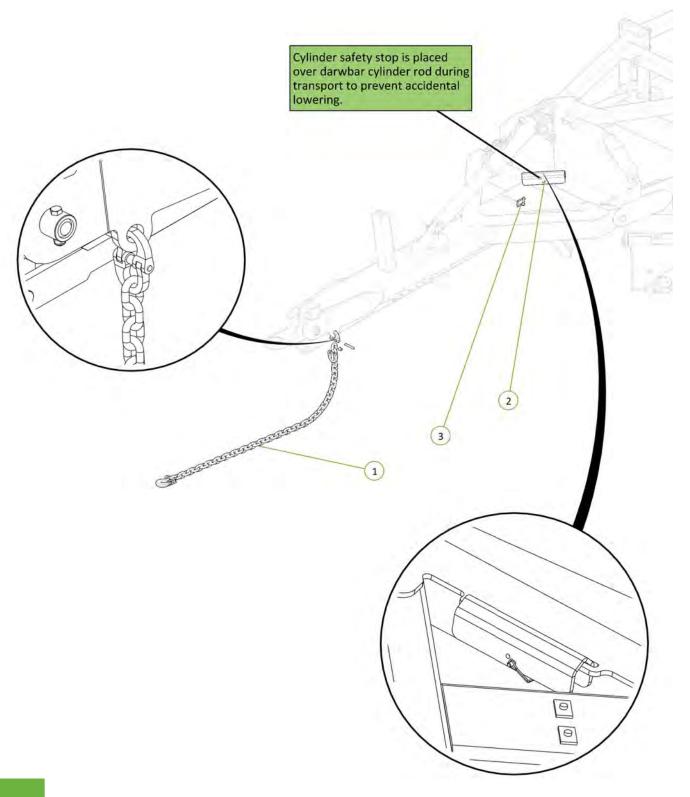



Item No.	Description	Qty	Number
1	20mm Bolt Swivel Unit	1	0802-PCHB55
2	Disc Chain Tie Plate Link 20mm	1	0802-DCTP-20
3	Tie Plate Bush	1	0801-PCDCS55
4	M20 x 110 grade 10.9 ZP Short Thread Bolt	3	0211-20110 ST
5	Nyloc Nut M20	3	0221-NYL20



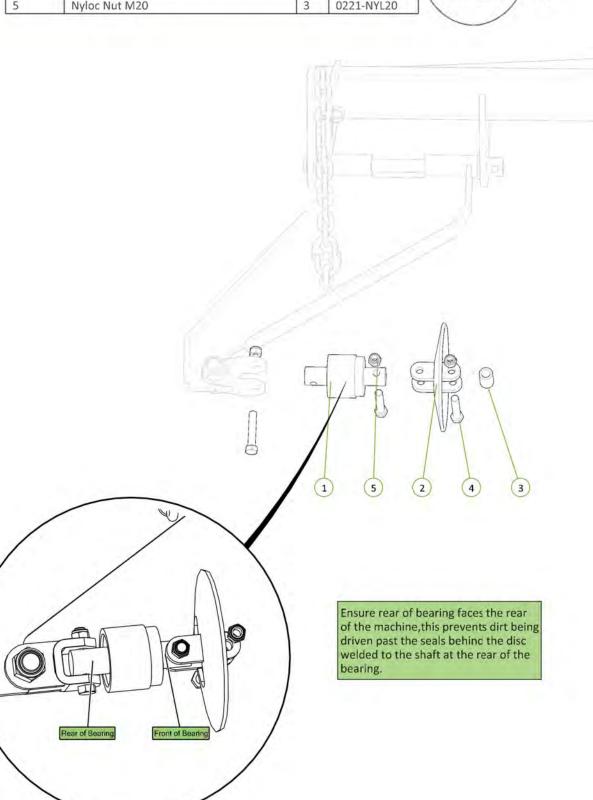

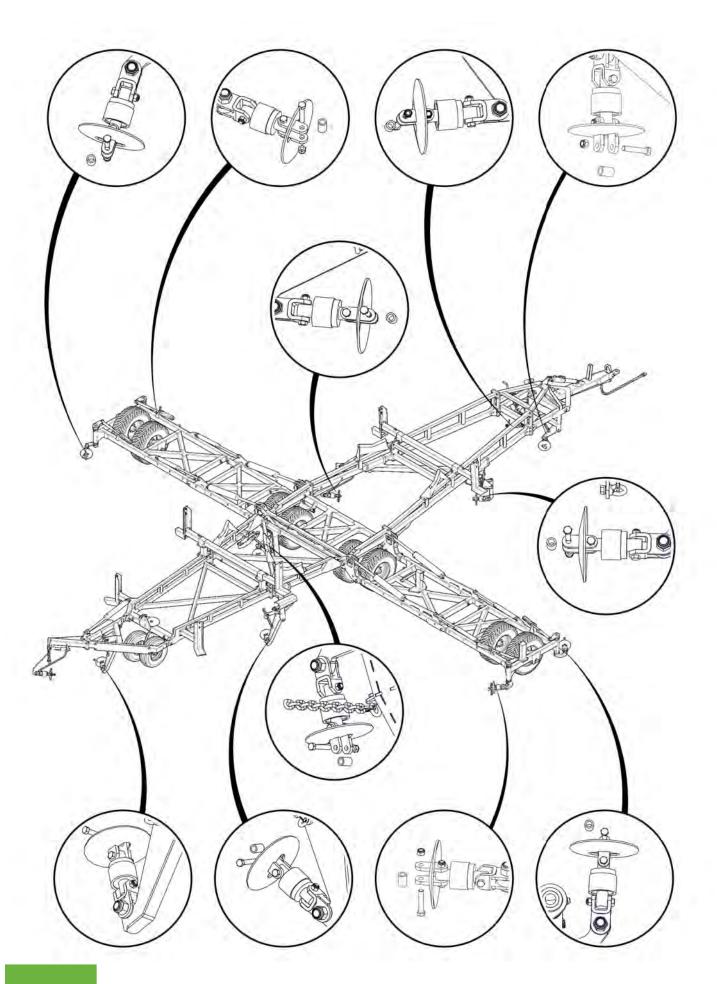


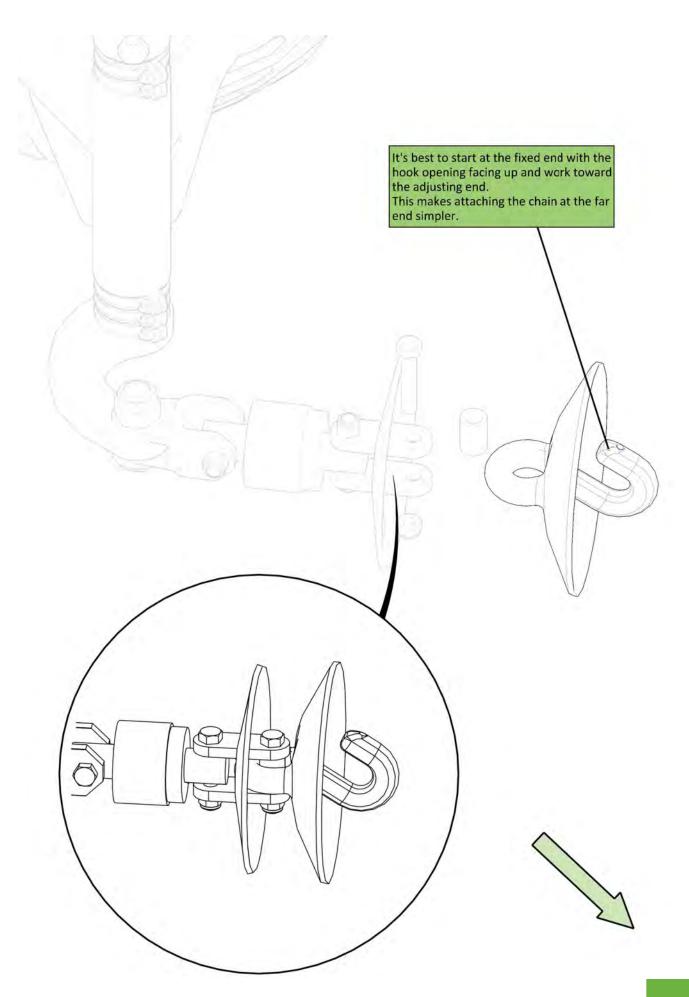

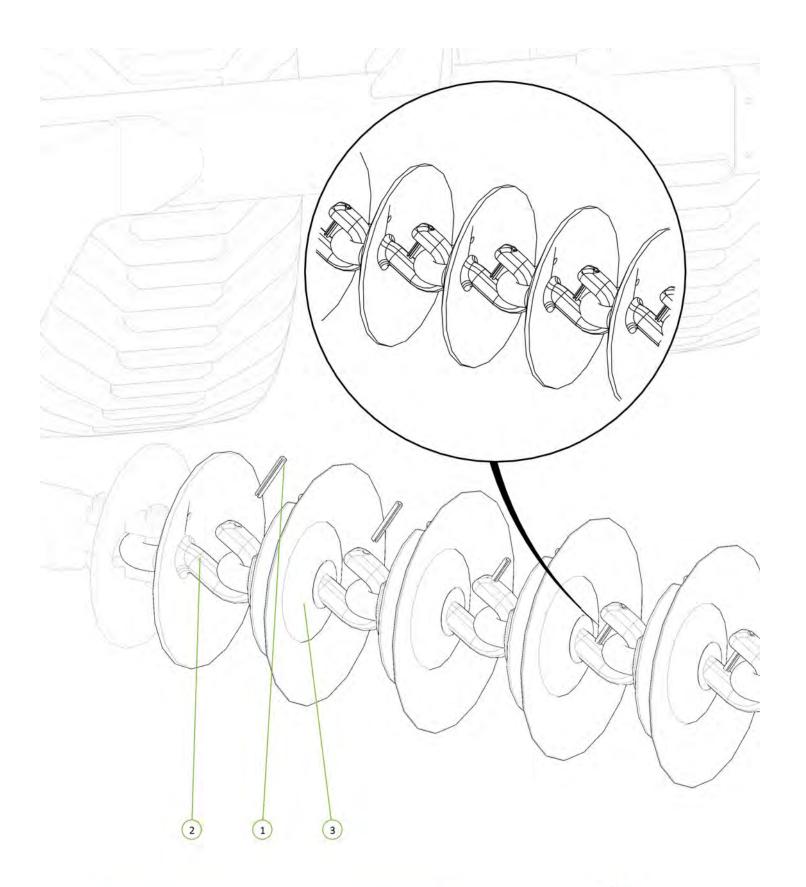

Item No.	Description	Qty	Number
1	Roll Pin Zinc Plated 3/8" x 3"	1	0262-3-8X3
2	CL1-B Chain Disc Link	1	0803-CL1
3	CL2-Link Assembly	1	0803-CL2-Link



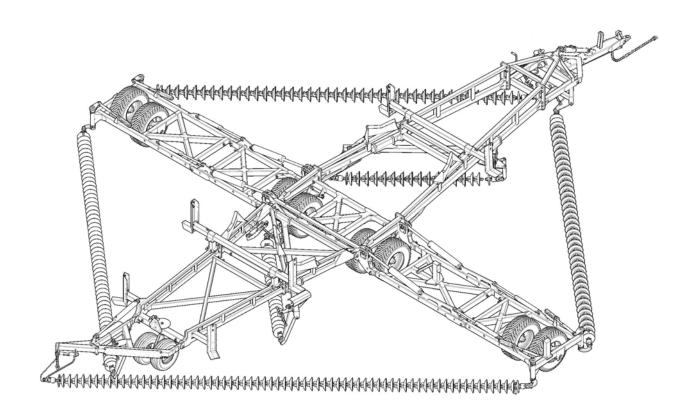





Section 3Hydraulic Setup

Please note Start at page 103 for machines that are part assembled on delivery




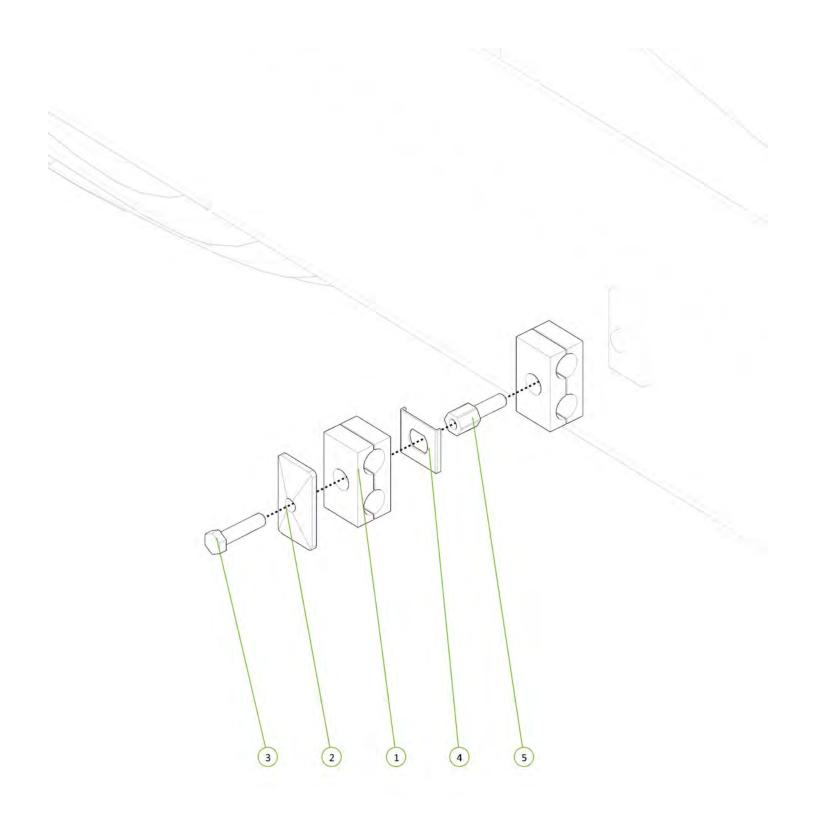


Item No.	Description	Qty	Number
1	RCD Double Clamp Jaws 17mm	2	0325-RCD-17J
2	RCD Double Clamp Top Plate No 2	1	0325-RCD-2PT
3	RCD Double Clamp Bolt No 2	1	0325-RCD-2BH
4	Double Clamp Stacking Plate (Non Ryco)	1	0325-SI-2-5D-W3
5	RCD Double Clamp Stacking Bolt No 2	1	0325-RCD-2BS

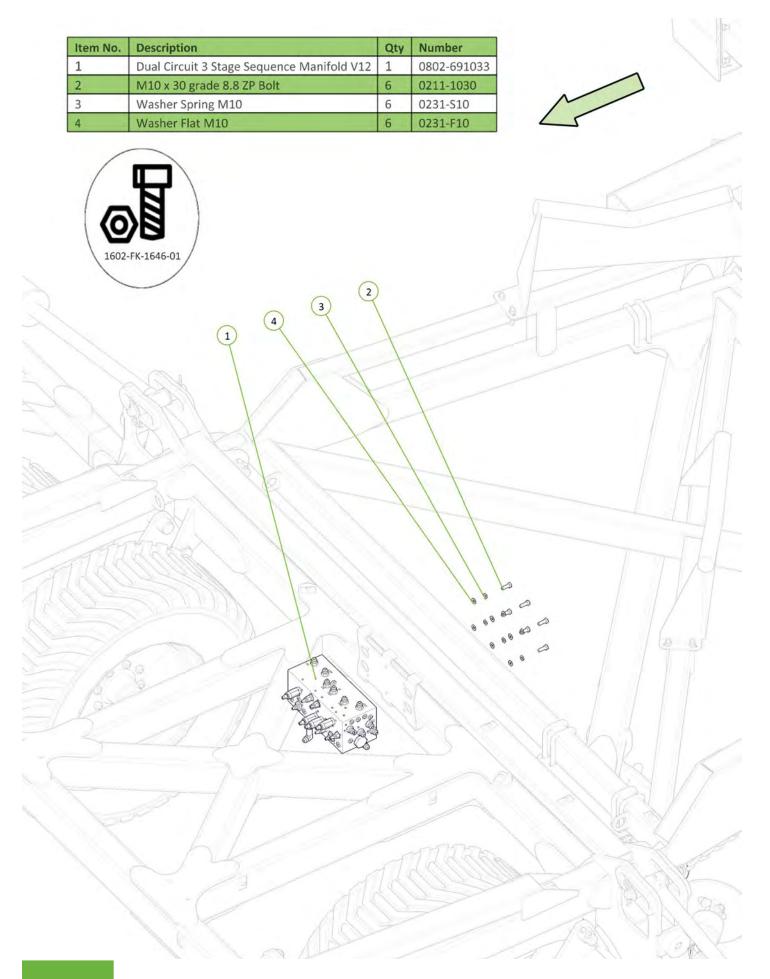



Item No.	Description	Qty	Number
1	TRACTOR TO SEQUENCE VALVE EXT1 PORT FITTED WITH GREEN EXT DECAL	1	H46-01-GE-EXT1
2	TRACTOR TO SEQUENCE VALVE RCT1 PORT FITTED WITH GREEN RET DECAL	1	H46-01-GR-RCT1
3	Green 1/2" NPT Hydra Grip Pair (Extend/Ret)	1	0325-HG-PT25E24R
4	BSPP QRC Ball Male Tip	2	0325-R91-08M

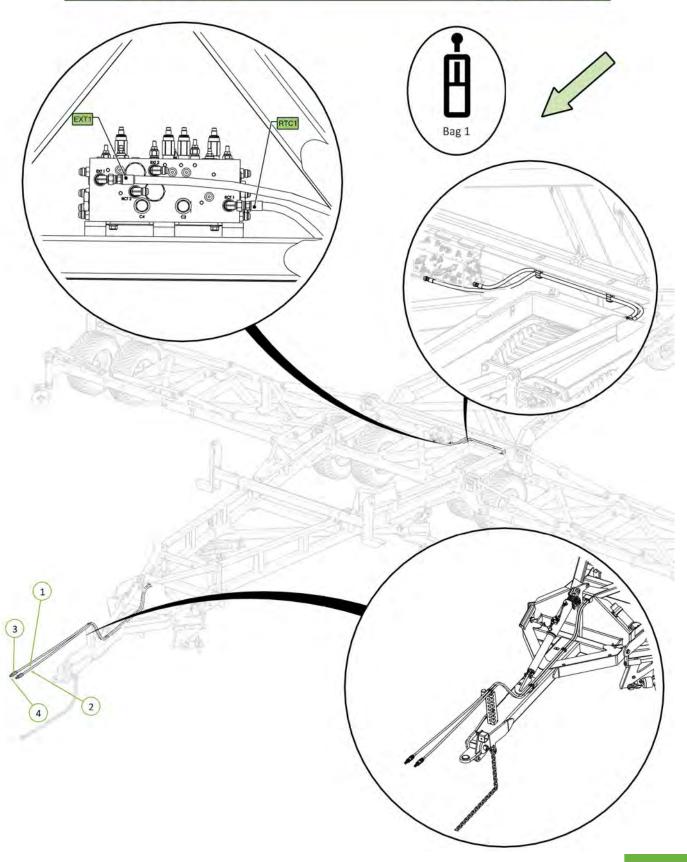


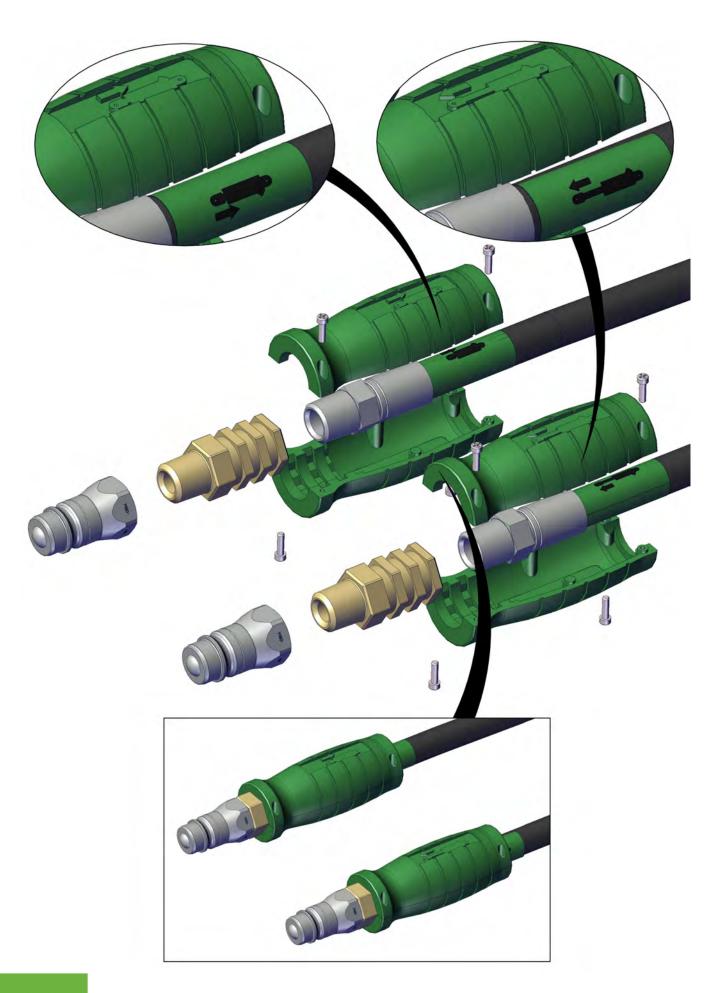



Item No.	Description	Qty	Number
1	TRACTOR TO SEQUENCE VALVE ECT2 PORT FITTED WITH YELLOW RET DECAL	1	H46-01-YR-RCT2
2	TRACTOR TO SEQUENCE VALVE EXT2 PORT FITTED WITH YELLOW EXT DECAL	1	H46-01-YE-EXT2
3	Yellow 1/2" NPT Hydra Grip Pair (Extend/Ret)	1	0325-HG-PT25E25R
4	BSPP QRC Ball Male Tip	2	0325-R91-08M

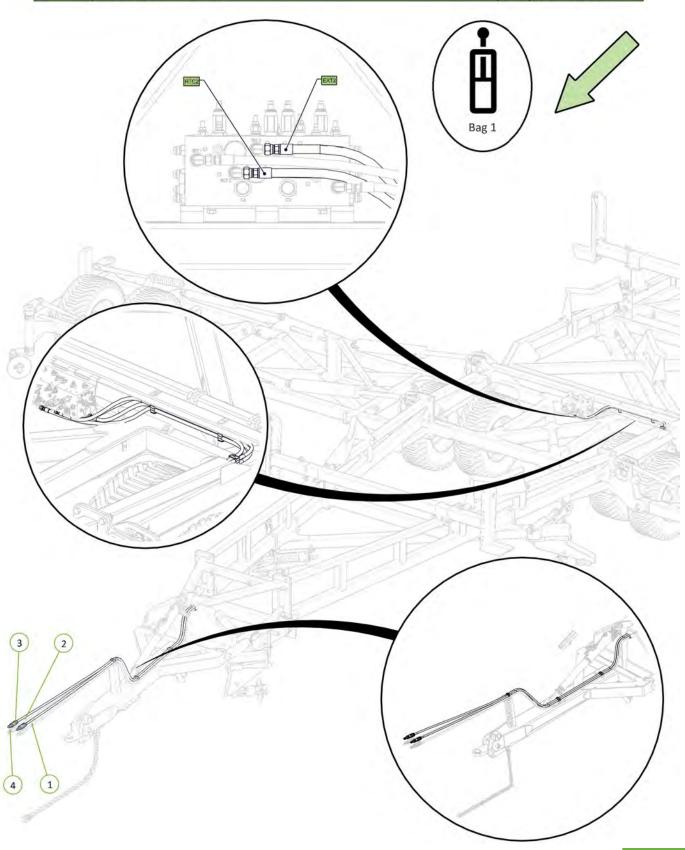

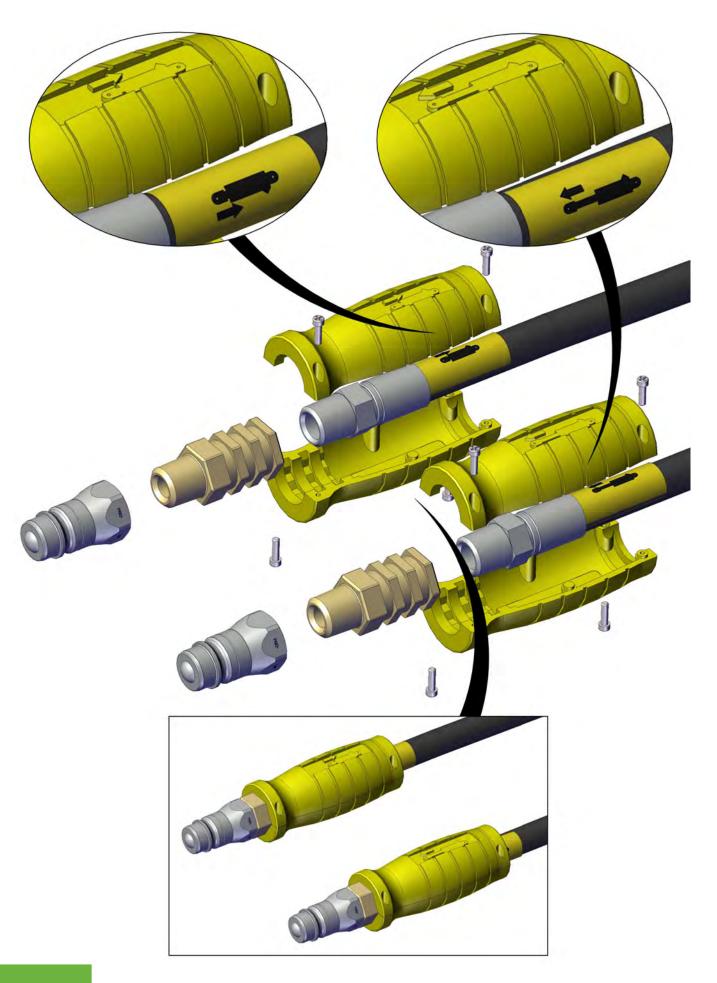


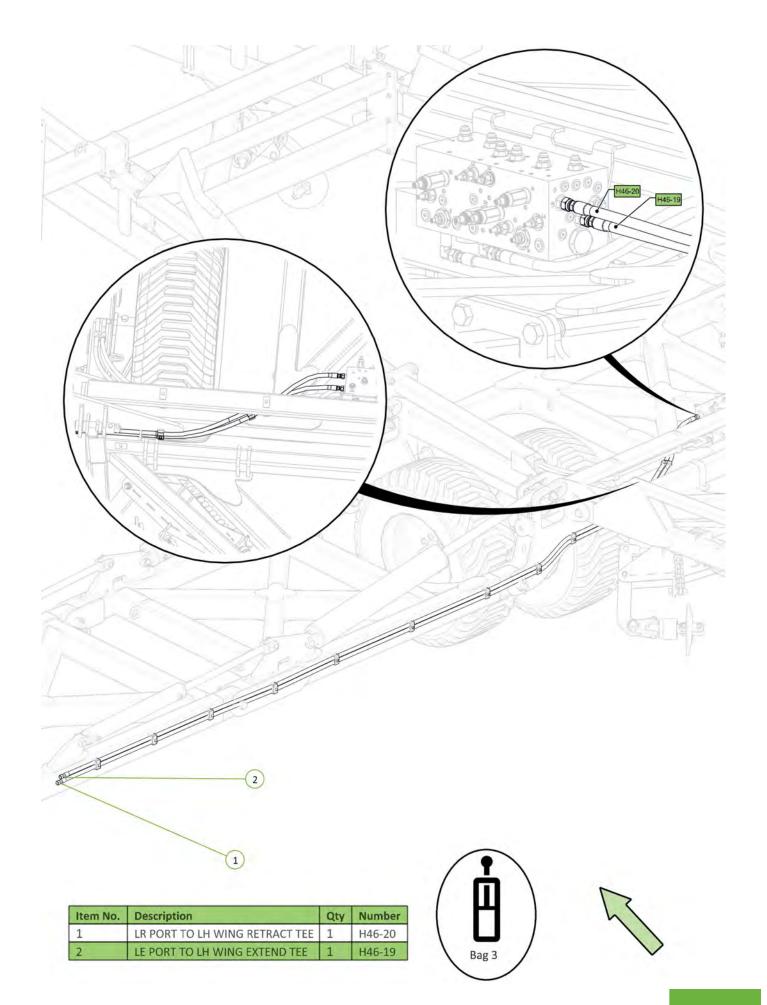


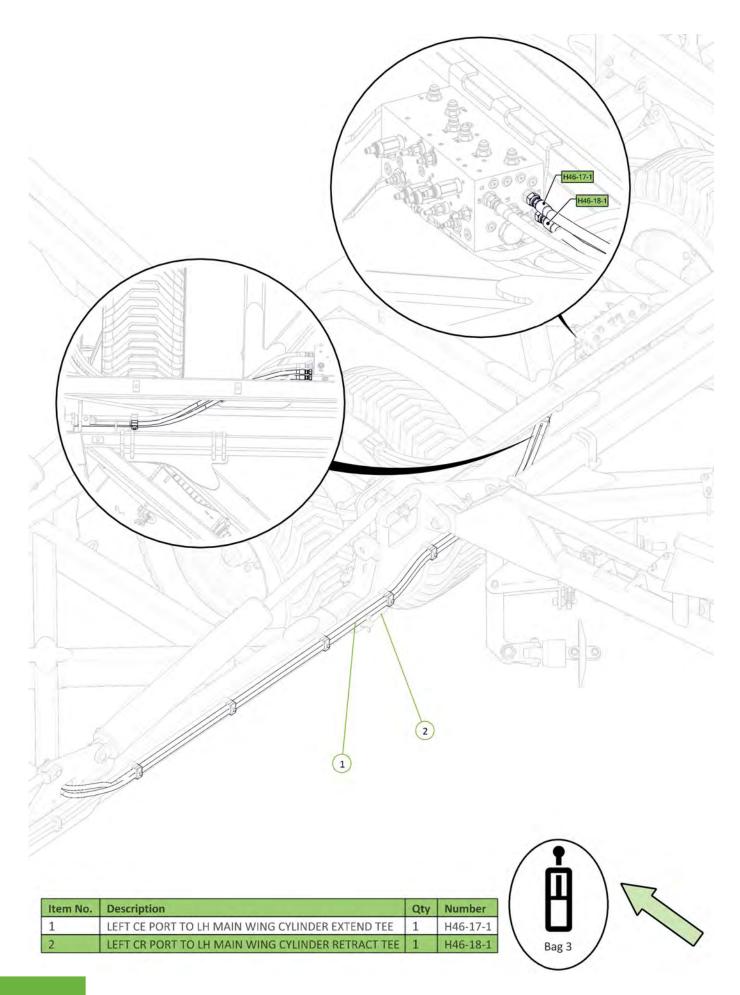

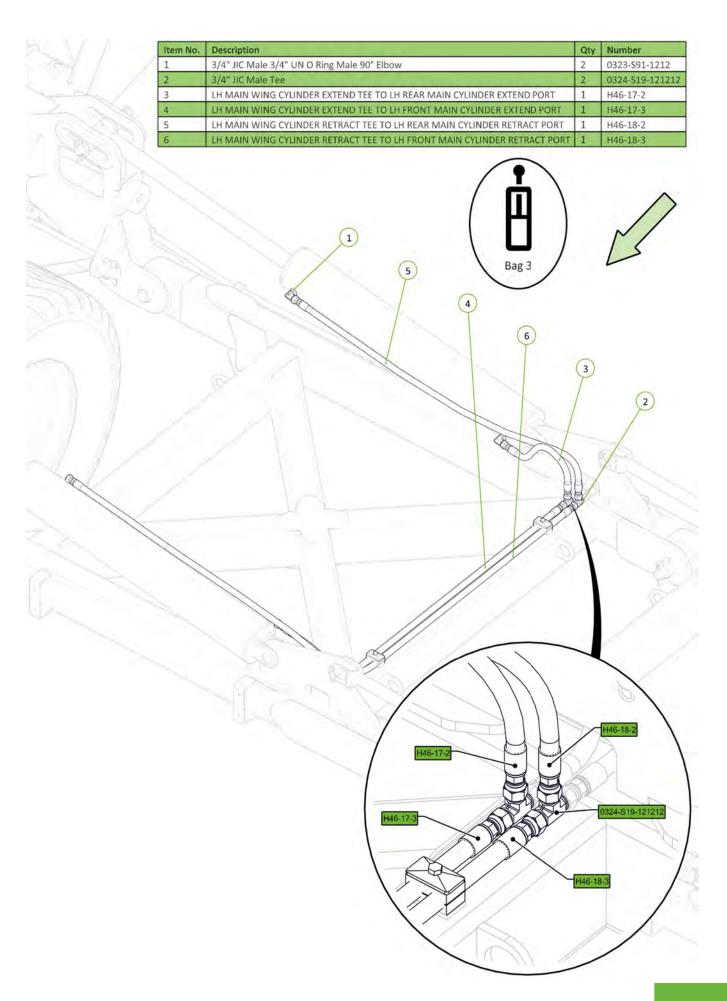



Item No.	Description	Qty	Number
1	LH WING EXTEND TEE TO LH REAR OUTER WING CYLINDER EXTEND PORT	1	H46-21
2	LH WING RETRACT TEE TO LH REAR OUTER WING CYLINDER RETRACT PORT	1	H46-22
3	JIC/UNO 90 Elbow	2	0323-591-1212
4	JICM JICM JICM TEE	2	0324-S19-121212




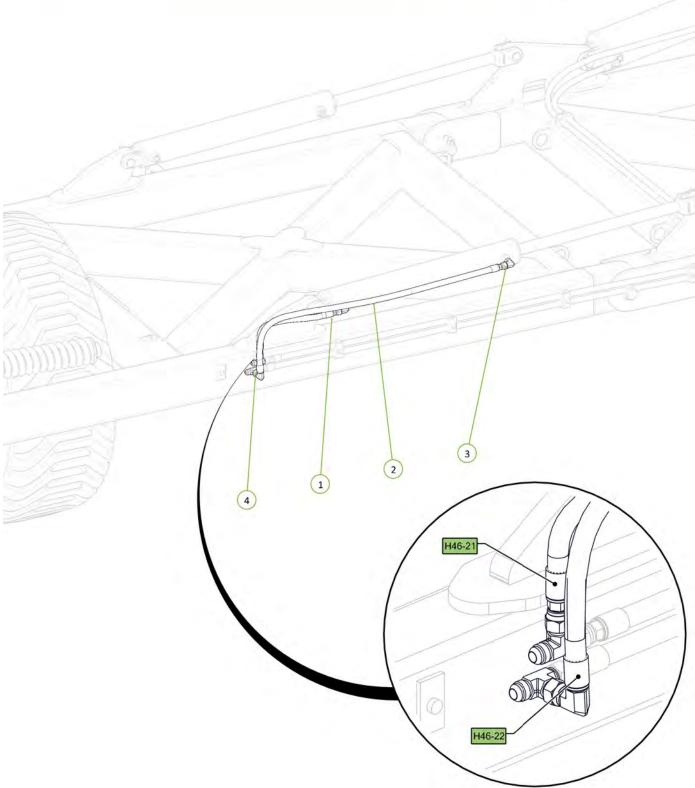



No.	Description	Qty				
	LH WING EXTEND TEE TO LH FRONT OUTER WING CYLINDER		H46-			
	LH WING RETRACT TEE TO LH FRONT OUTER WING CYLINDER JIC/UNO 90 Elbow	R RETRACT PORT 1	H46-	-S91-1212	1	ш
						Bag 3
		3				45
	1	3				
						0
		100				FR
Th.	TO STATE OF THE ST			1 /6		0 11
770				1)		
MG						
		-7				
						10
						TAU
		i i				
7	No.					
_				1	111	
			202	T	4	
		H46	-23			
				A		5
			R		MA	
		11	7 (1		

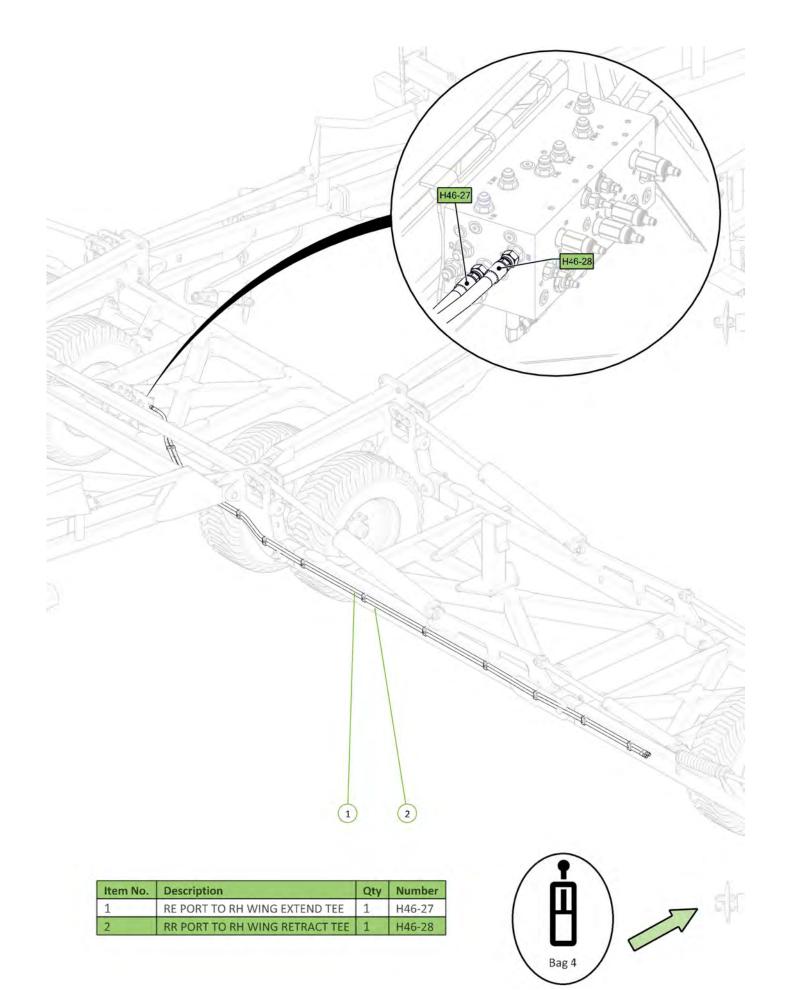

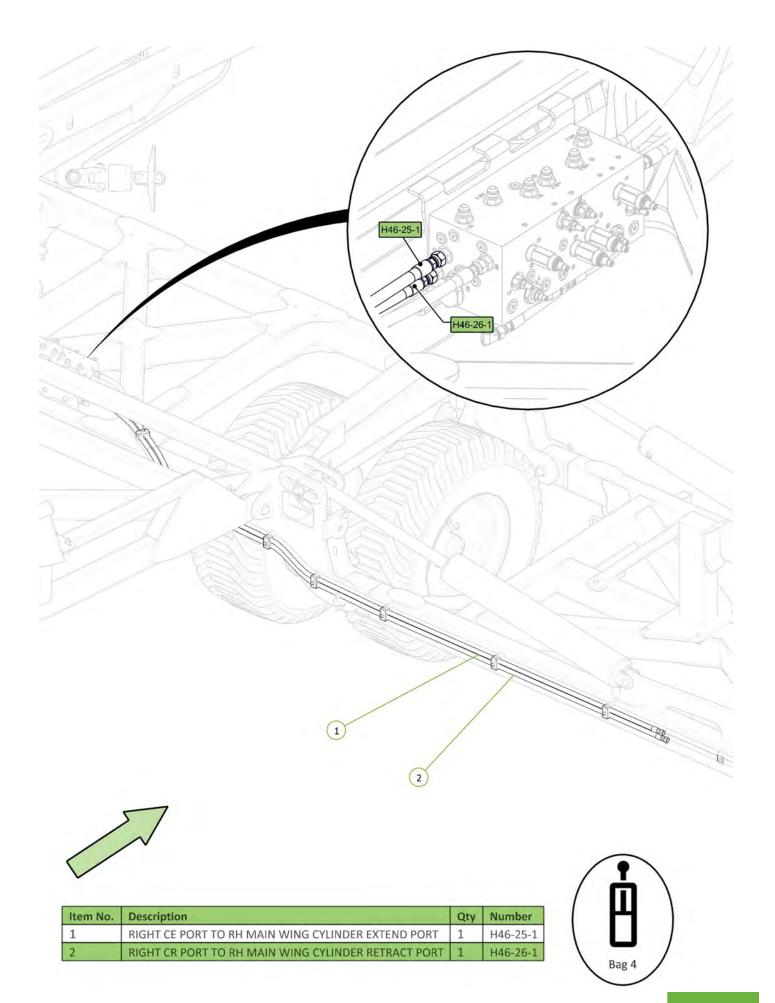


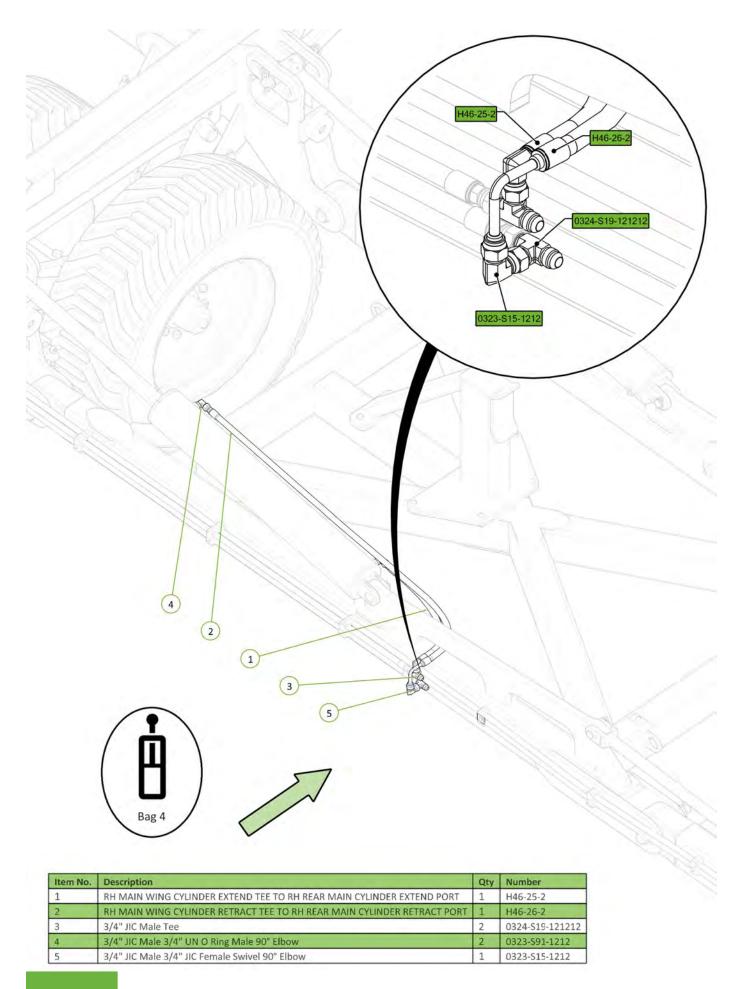


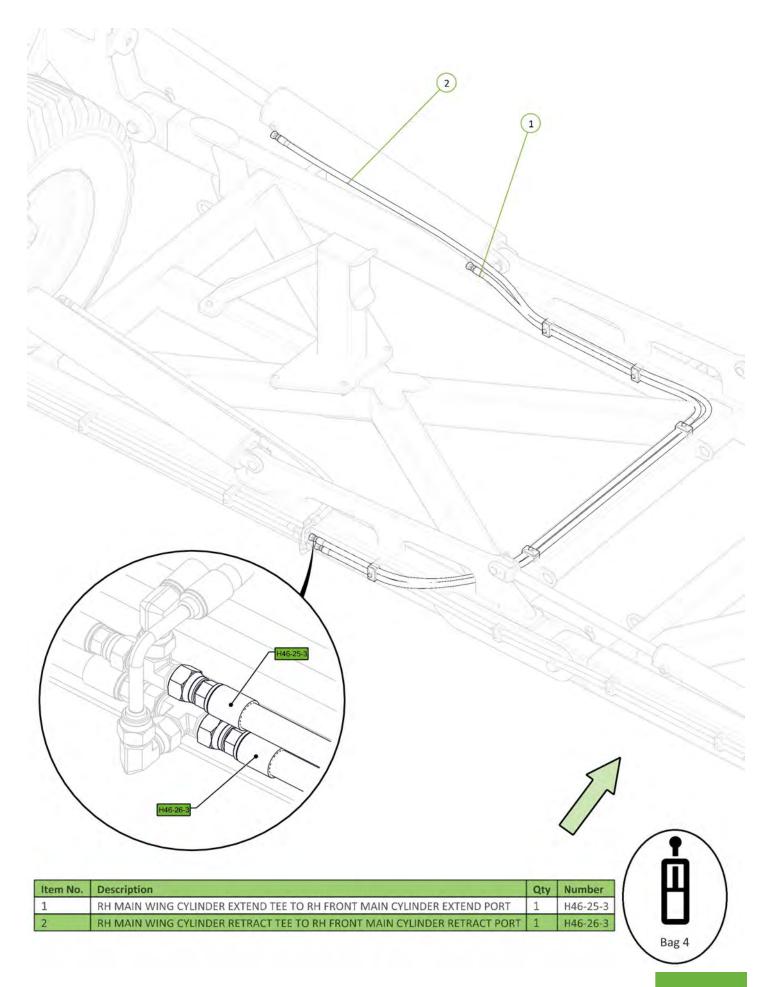


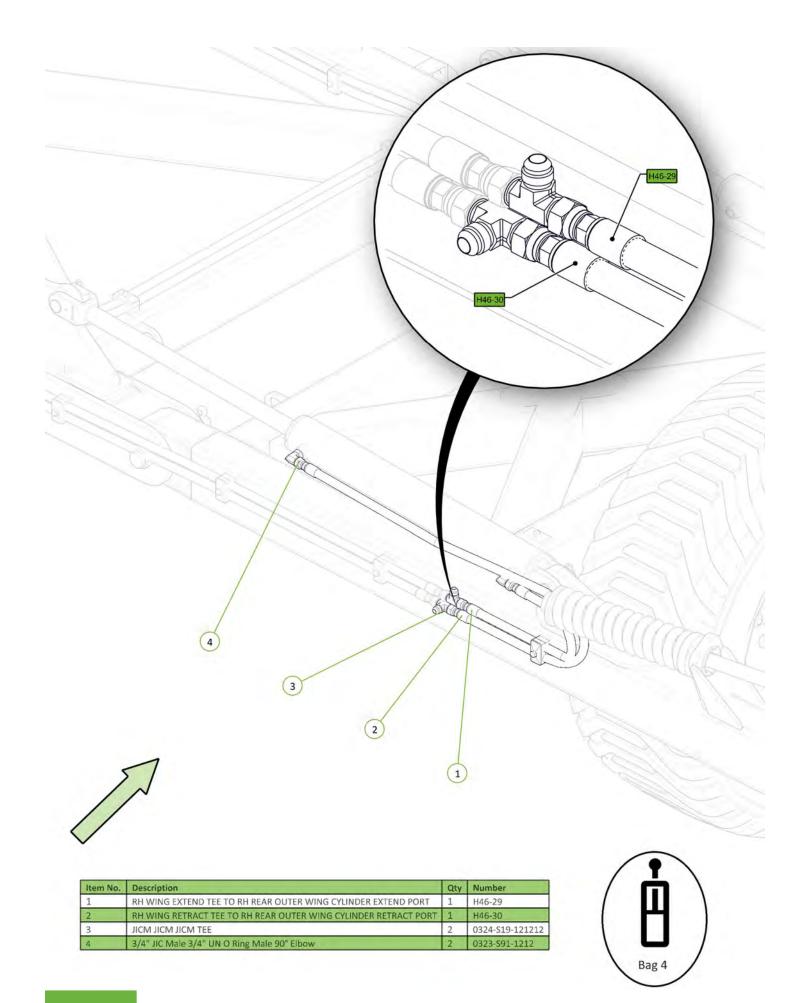


Item No.	Description	Qty	Number
1	RH WING EXTEND TEE TO RH FRONT OUTER WING CYLINDER EXTEND PORT	1	H46-31
2	RH WING RETRACT TEE TO RH FRONT OUTER WING CYLINDER RETRACT PORT	1	H46-32
3	JICM JICFS 90' ELBOW	1	0323-S15-1212
4	JIC/UNO 90 Elbow	2	0323-591-1212

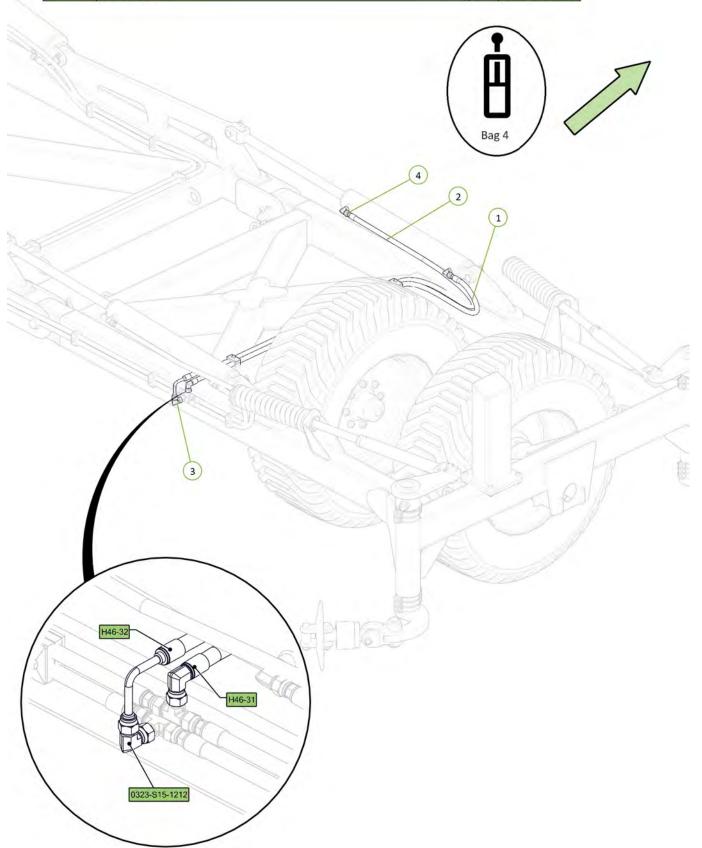


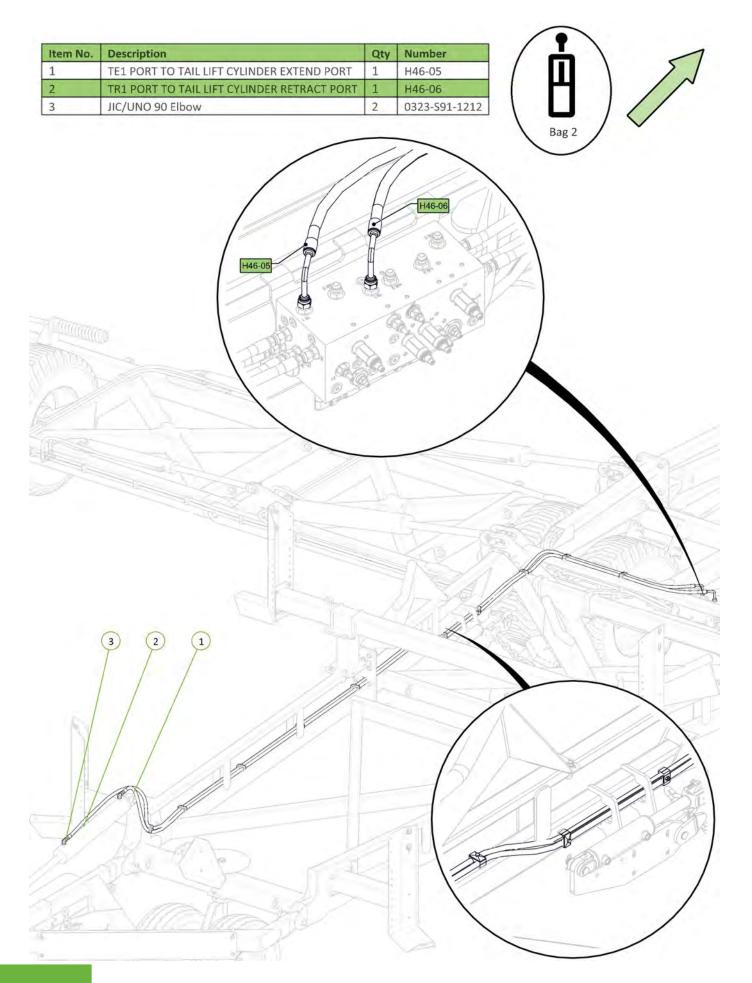


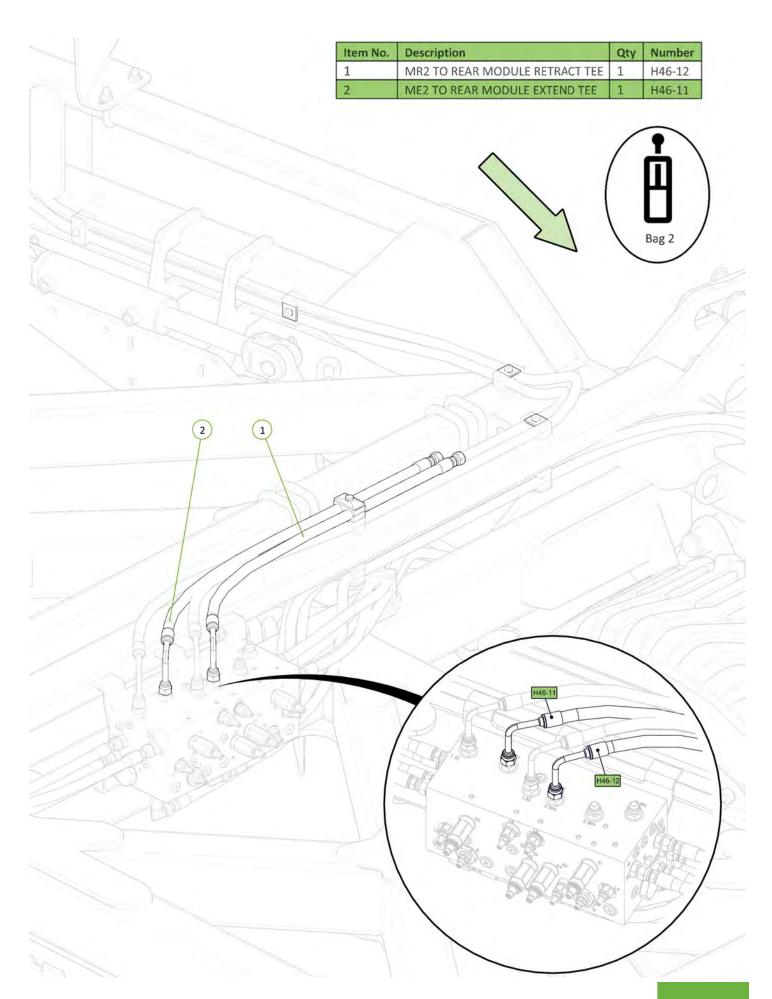

Item No.	Description	Qty	Number
1	REAR MODULE EXTEND TEE TO LH REAR MODULE CYL EXTEND PORT	1	H46-13
2	REAR MODULE RETRACT TEE TO LH REAR MODULE CYL RETRACT PORT	1	H46-14
3	JIC/UNO 90 Elbow	2	0323-S91-1212
4	JICM JICM JICM TEE	2	0324-519-121212

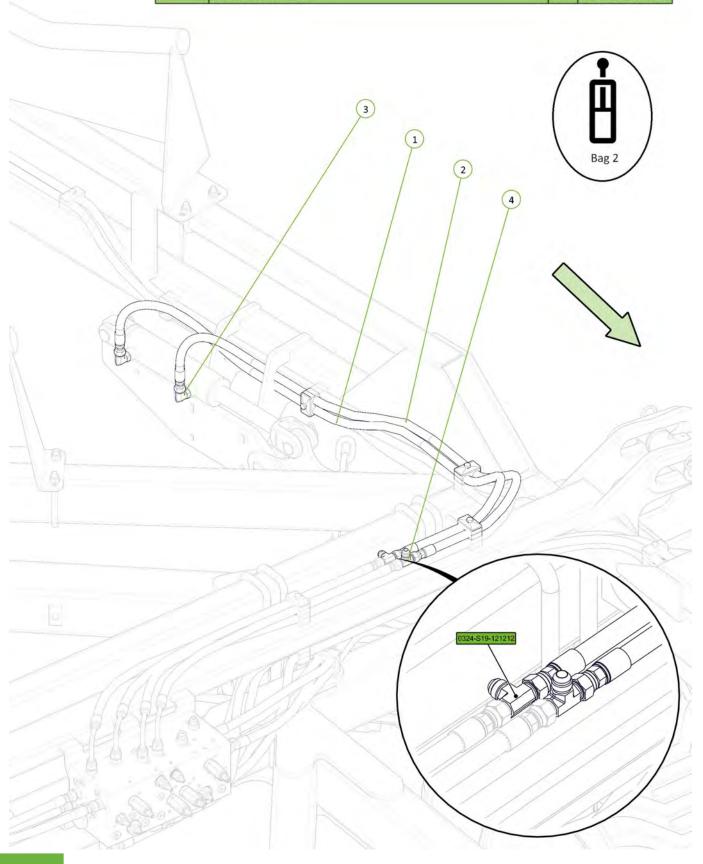

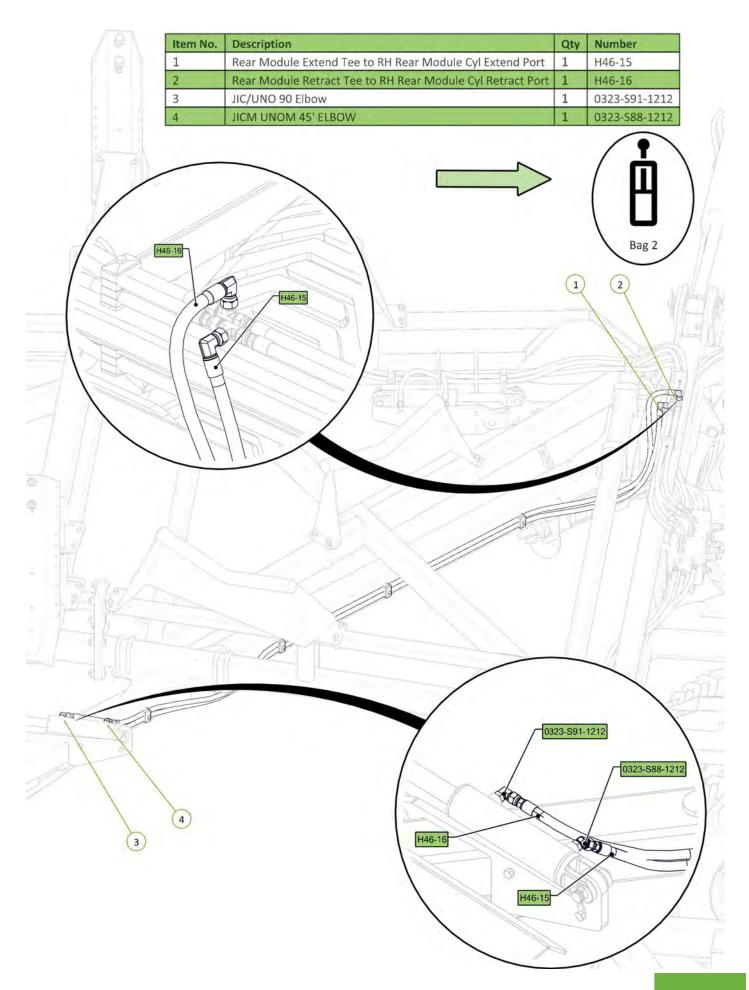


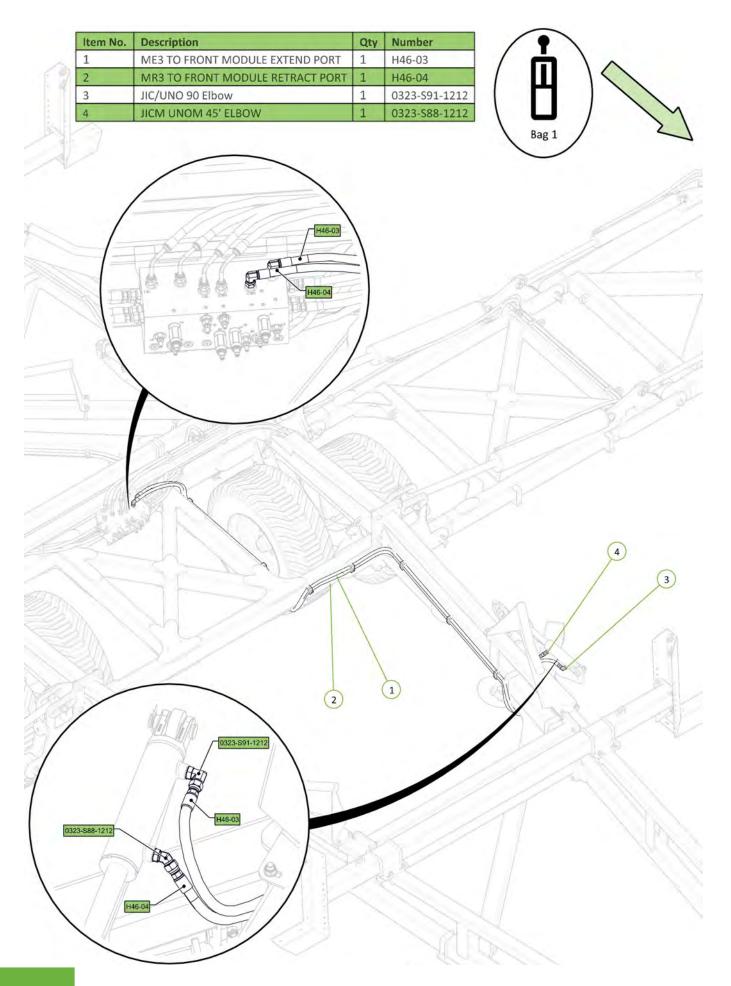

Item No.	Description	Qty	Number
1	TRACTOR TO FRONT LIFT CYLINDER RETRACT PORT FITTED WITH BLUE RET GRIP	1	H46-02-BR-RCT
2	TRACTOR TO FRONT LIFT CYLINDER EXTEND PORT FITTED WITH BLUE EXT GRIP	1	H46-02-BE-EXT
3	JIC/UNO 90 Elbow	2	0323-S91-1212
4	Blue 1/2" NPT Hydra Grip Pair (Extend/Ret)	1	0325-HG-PT20E20R






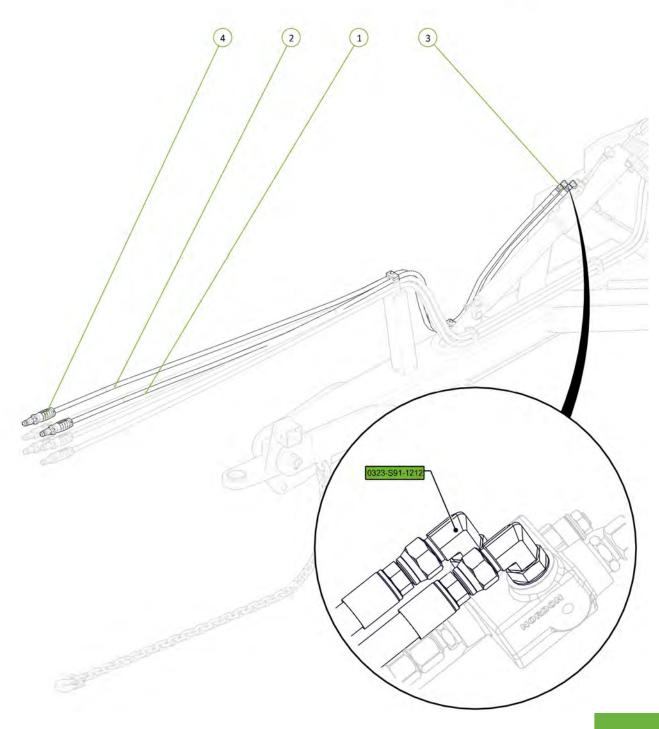




Hydraulic Fittings

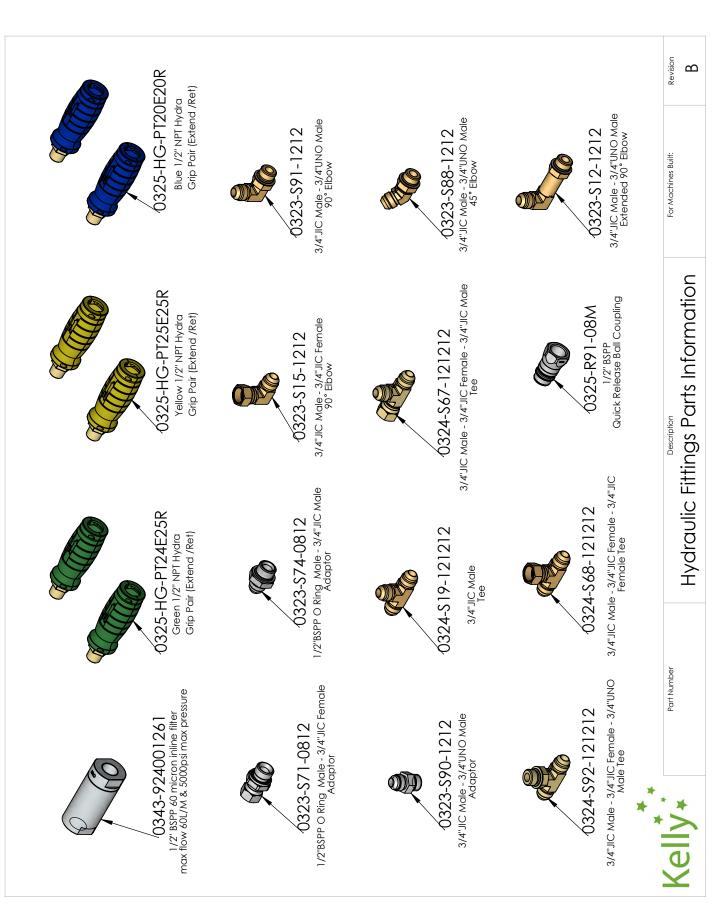


Section 4 Light Kit

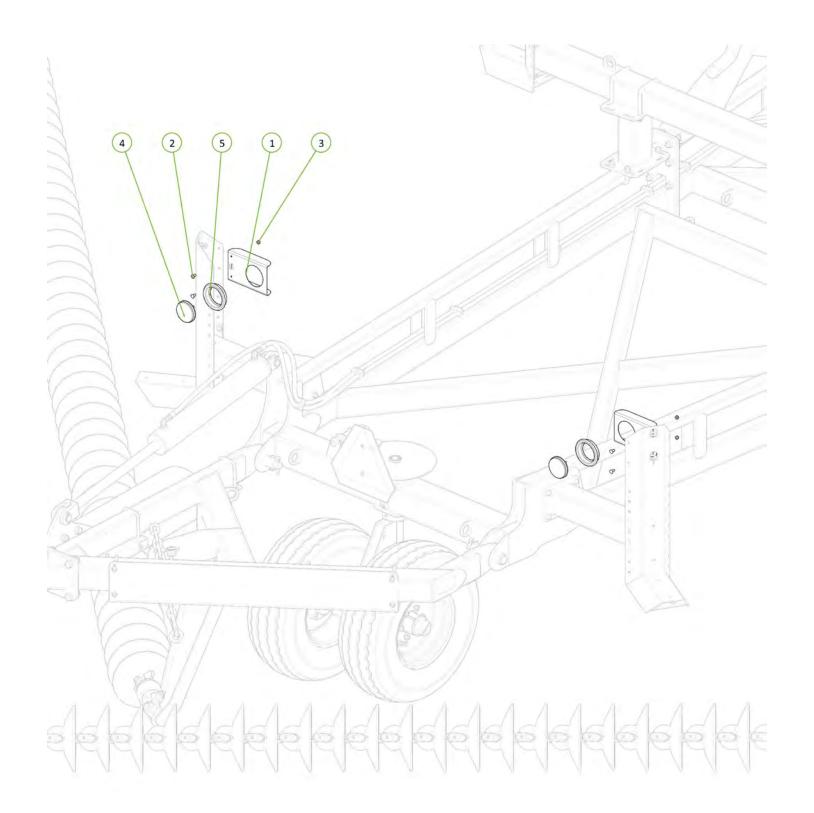

Item No.	Description	Qty	Number
1	Rear Light Bracket	2	0800-295
2	M8 x 20 Coach Head Bolt	4	0215-CH0820
3	Nyloc Nut M8	4	0221-NYL8
4	LED Stop Tail Lamp	2	0412-LED110RM
5	110RM Rubber Grommet	2	0412-53101RG






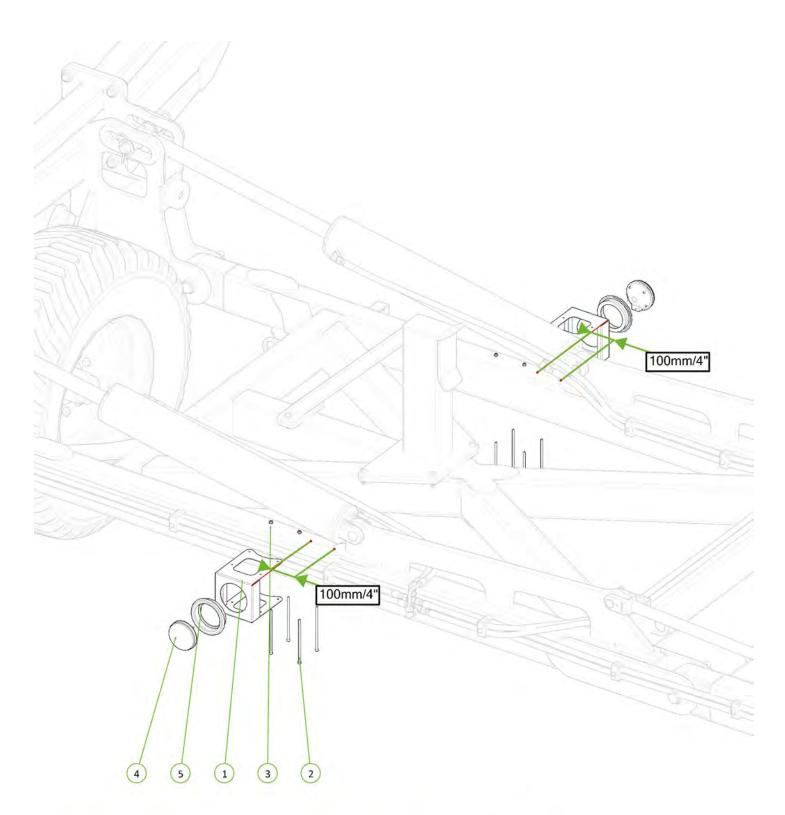

Item No.	Description	Qty	Number
1	Wing light bracket	2	0800-296
2	Socket Head Bolt M6 x 170 zp	8	0211-SH6170
3	Nyloc Nut M6	8	0221-NYL6
4	LED Rear Indicator Lamp	2	0412-LED110AM
5	110RM Rubber Grommet	2	0412-53101RG






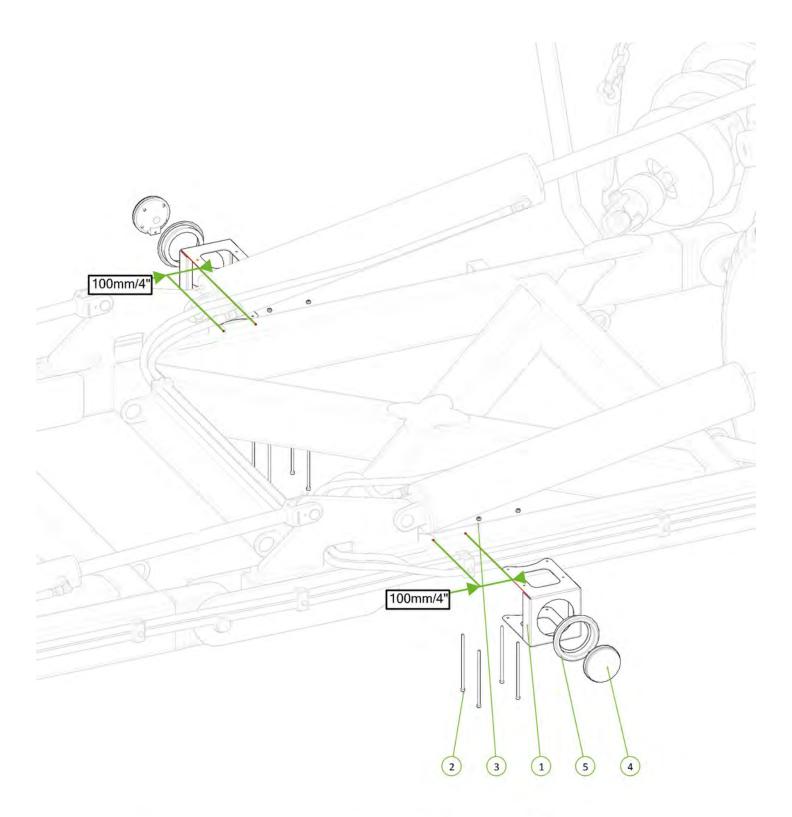



Item No.	Description	Qty	Number
1	Wing light bracket	2	0800-296
2	Socket Head Bolt M6 x 170 zp	8	0211-SH6170
3	Nyloc Nut M6	8	0221-NYL6
4	LED Rear Indicator Lamp	2	0412-LED110AM
5	110RM Rubber Grommet	2	0412-53101RG








Item No.	Description	Qty	Number
1	Electrical Plug Keeper	1	0416-11750B
2	M6 x 20 Trilobe self tapping Scew	2	0211-M620MZPHTF




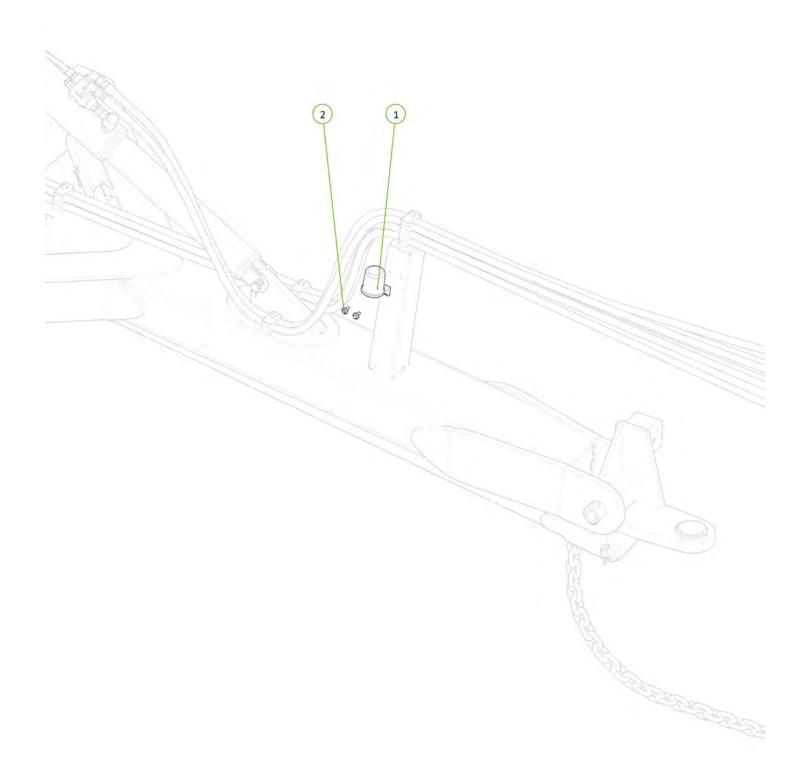


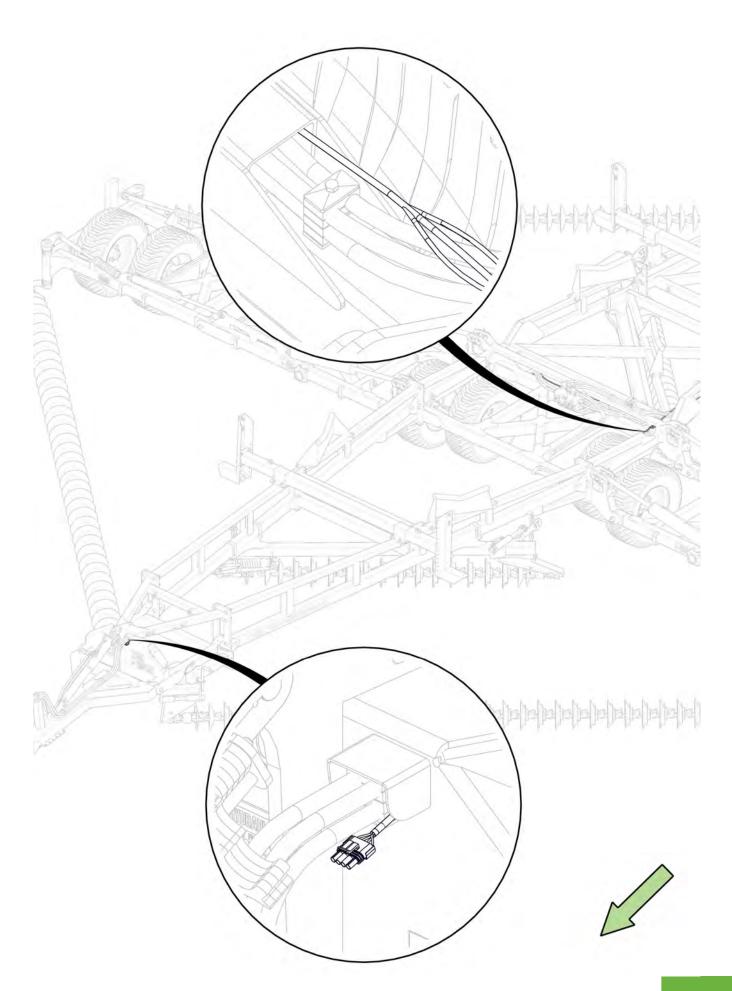


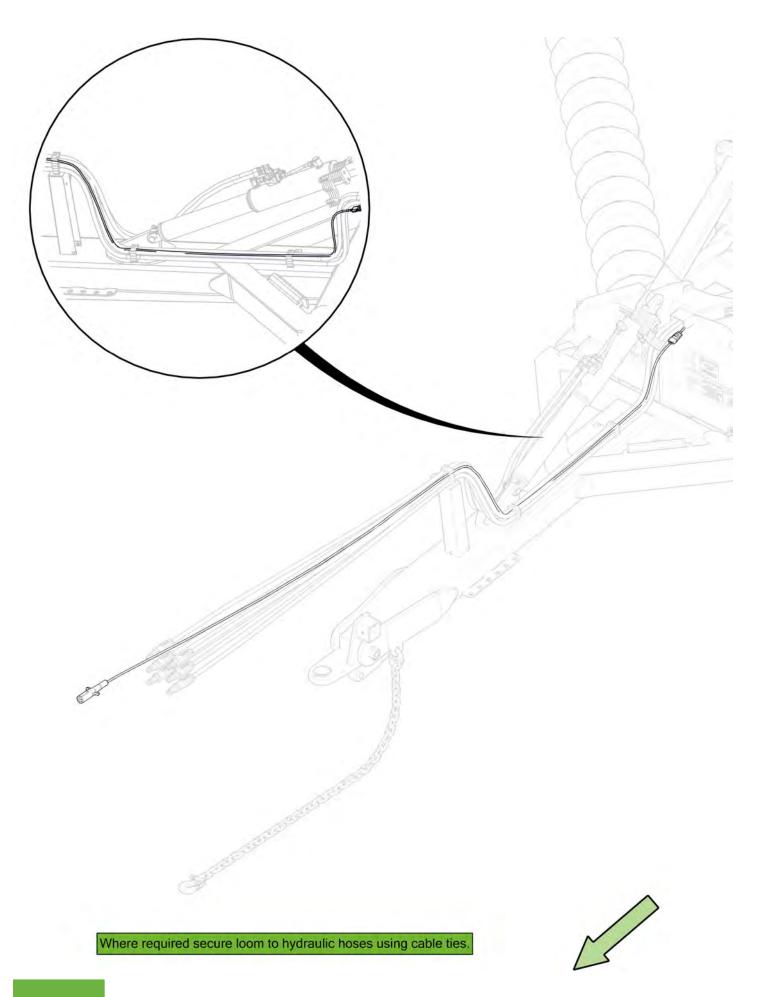


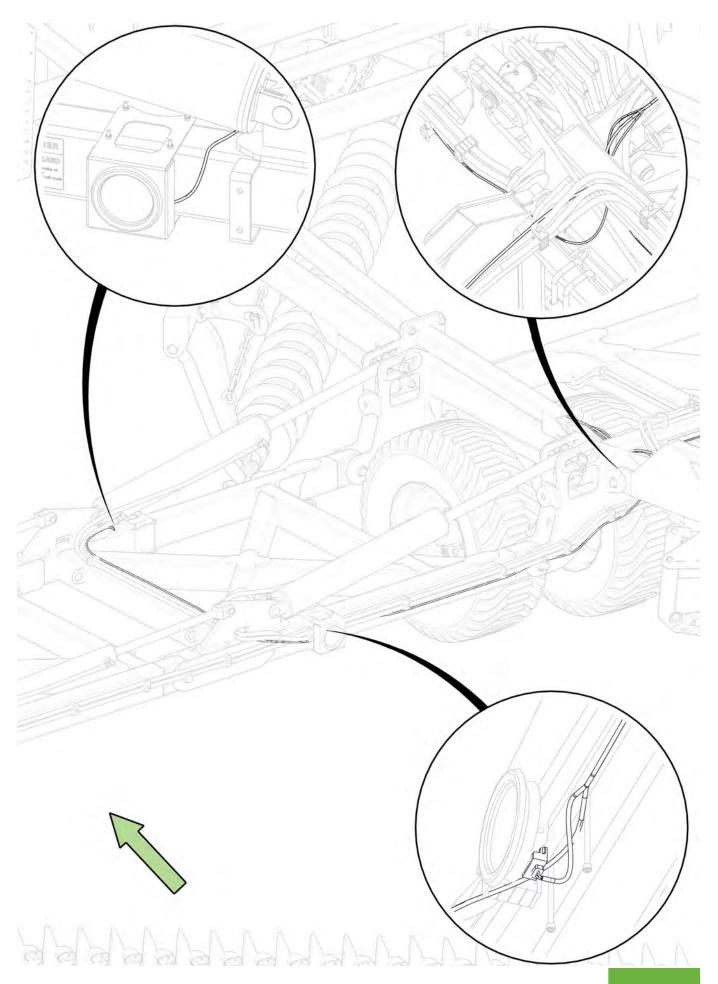

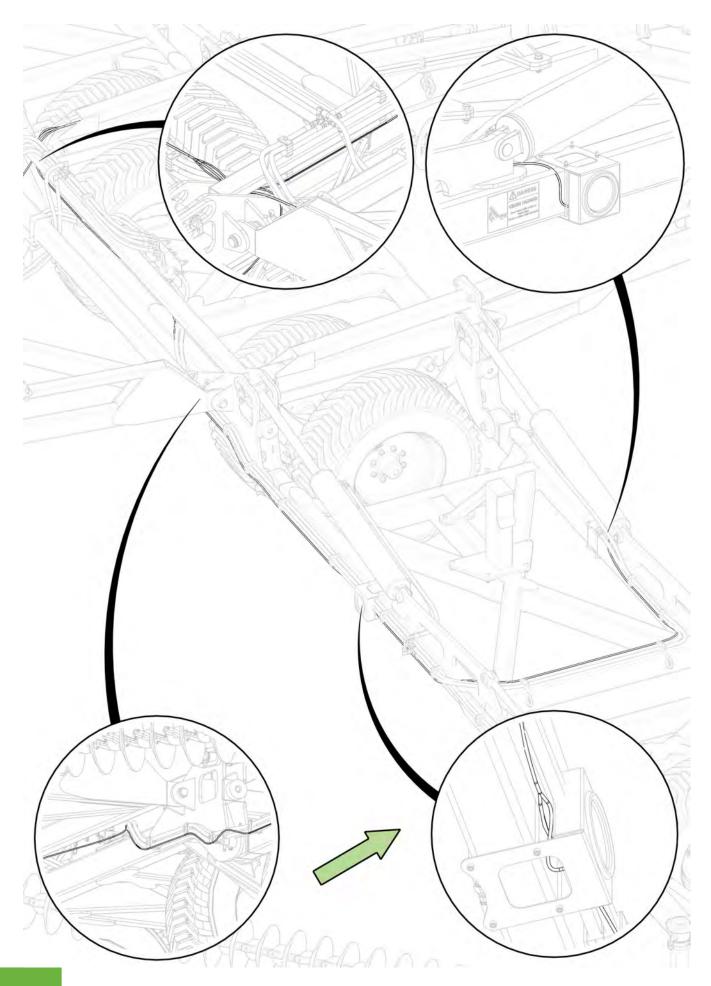


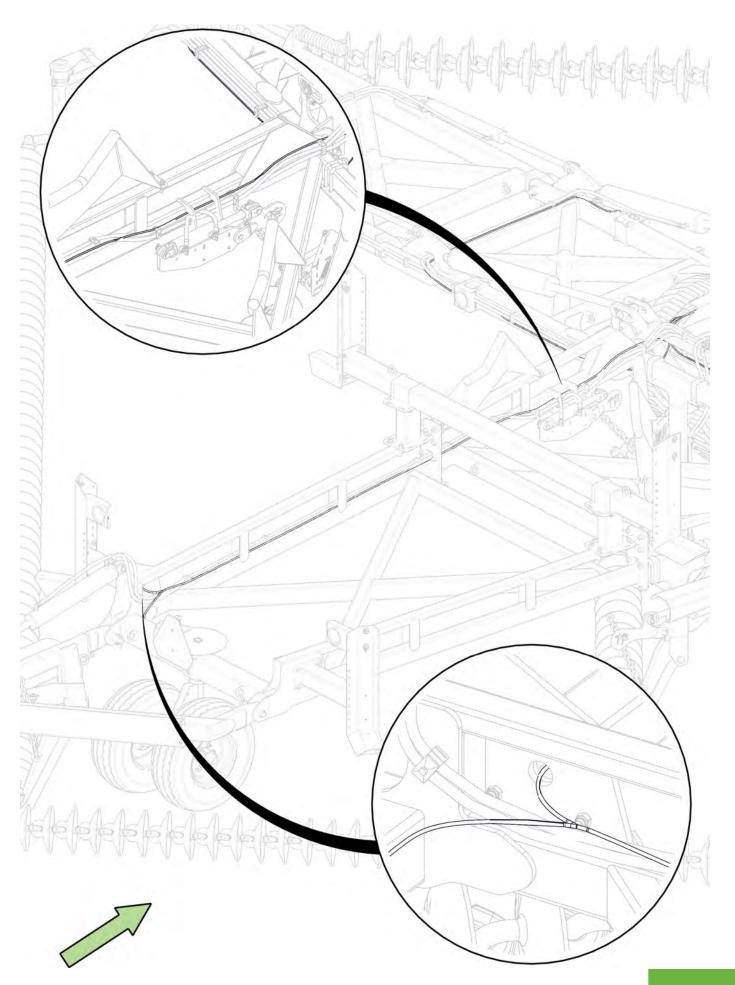

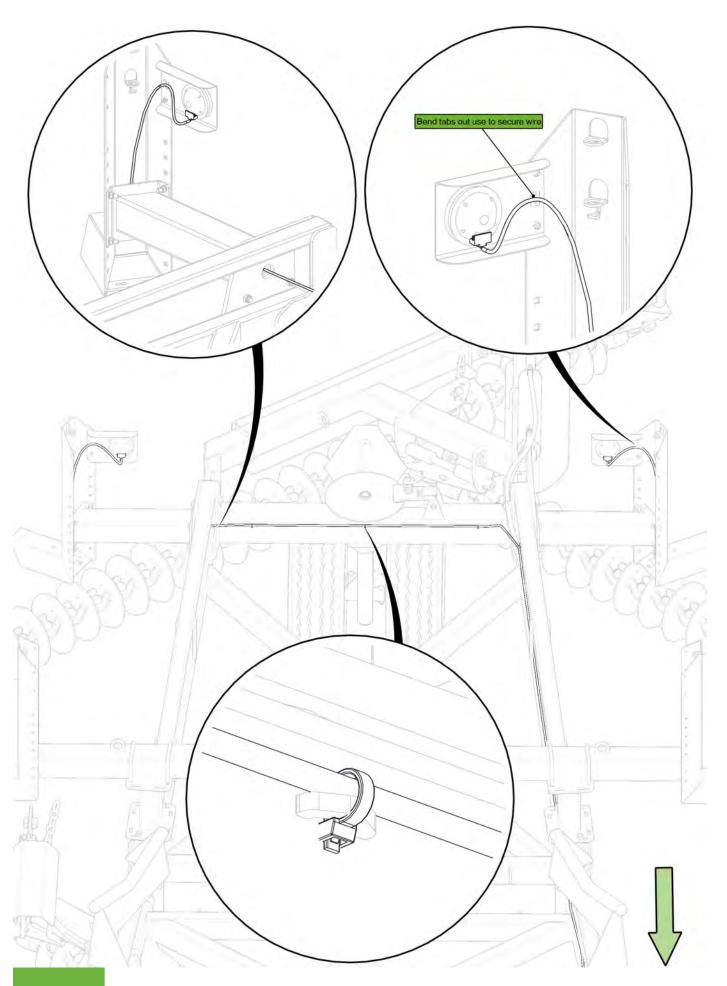

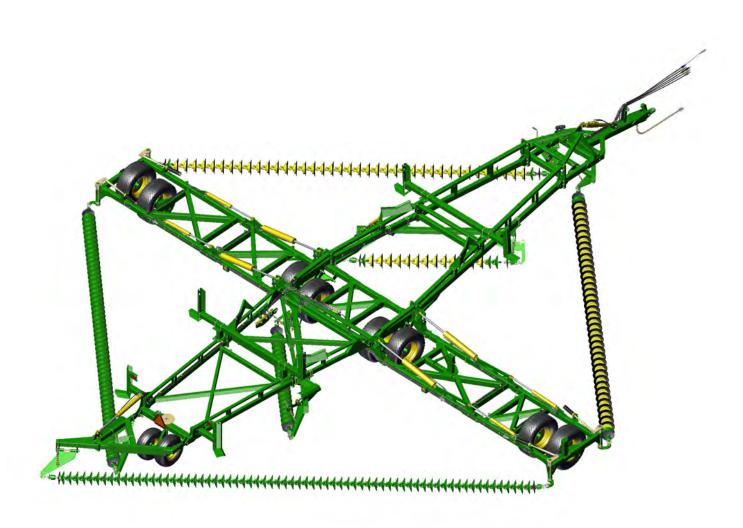



Section 5 Chain Assembly

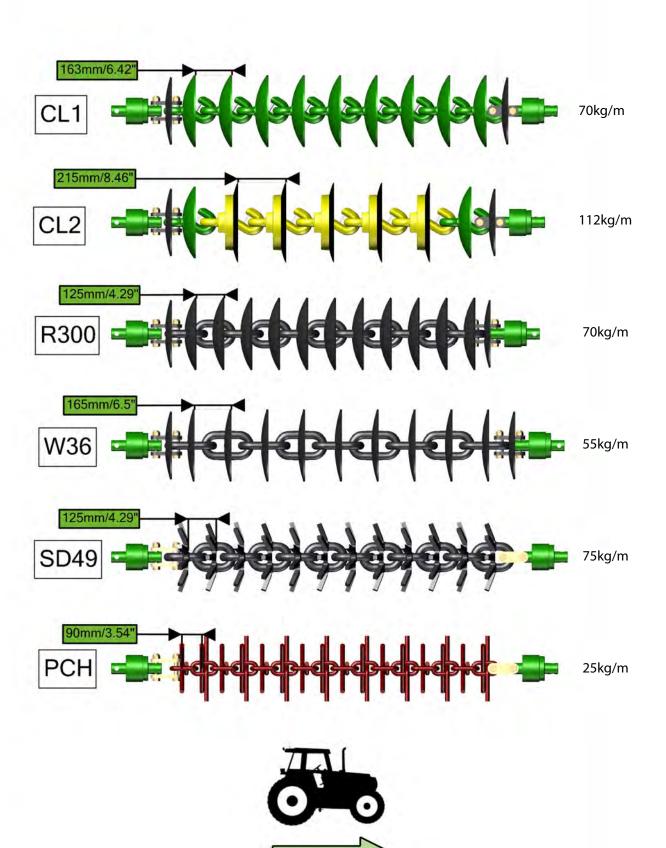

CL1 Disc Chain - CL47/35/7


Item No.	Description	Number	Qty
1	Nyloc Nut M20/24	0221-NYL20/24	4
2	M20 x 110 / M24 x 120 grade 10.9 ZP Short Thread Bolt	0211-20110ST/0211-24120ST	4
3	20/24mm Bolt Swivel Unit	0802-PCHB55 / 0802-PCHB553	2
4	Disc Chain Tie Plate Link 20mm / 24mm	0802-DCTP-20 / 0802-DCTP-24	2
5	Tie Plate Bush	0801-PCDCS55	2
6	Roll Pin Zinc Plated 3/8" x 3"	0262-3-8X3	1
7	CL1-B Chain Disc Link	0803-CL1	1




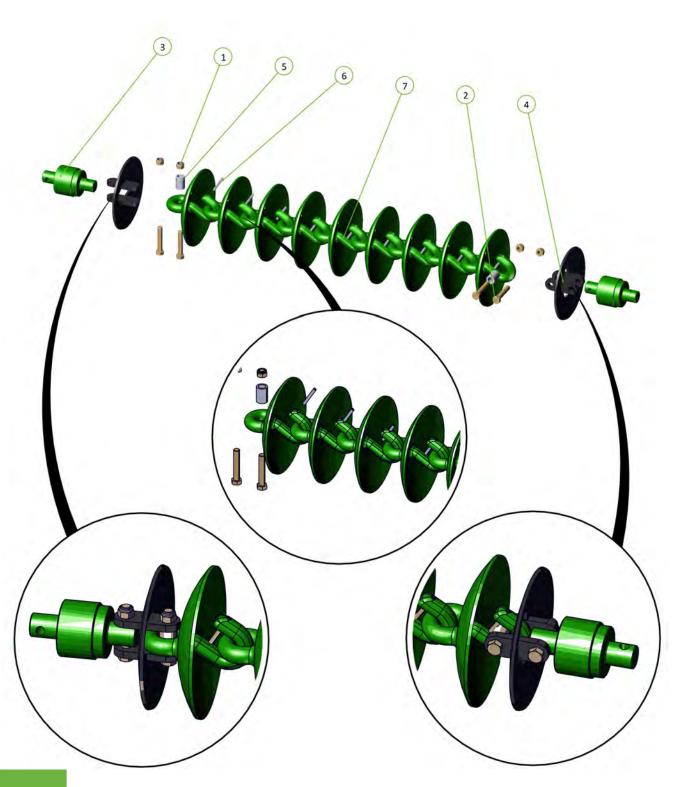


CL2 Disc Chain - CL75/25/8

Item No.	Description	Number	Qty
1	0803-CL2-Link Assembly	0803-CL2	1
2	CL1-B Chain Disc Link	0803-CL1	1




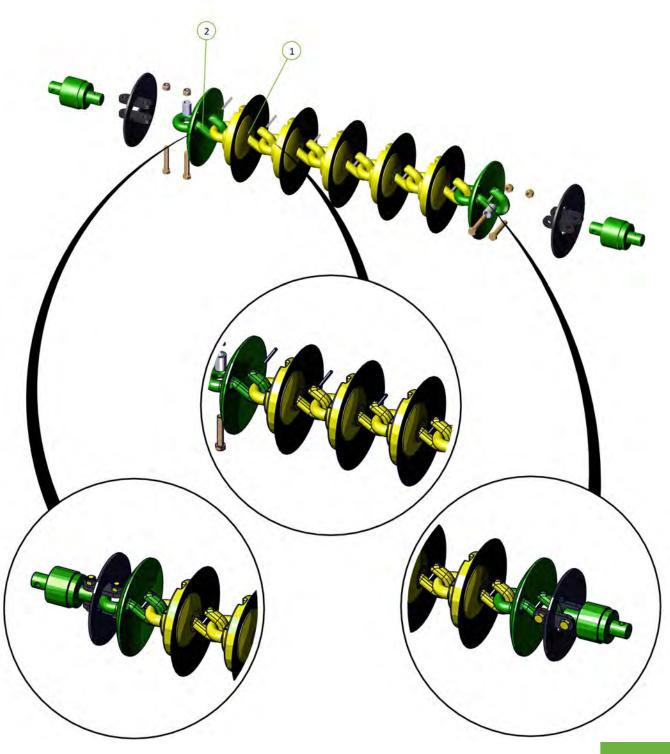


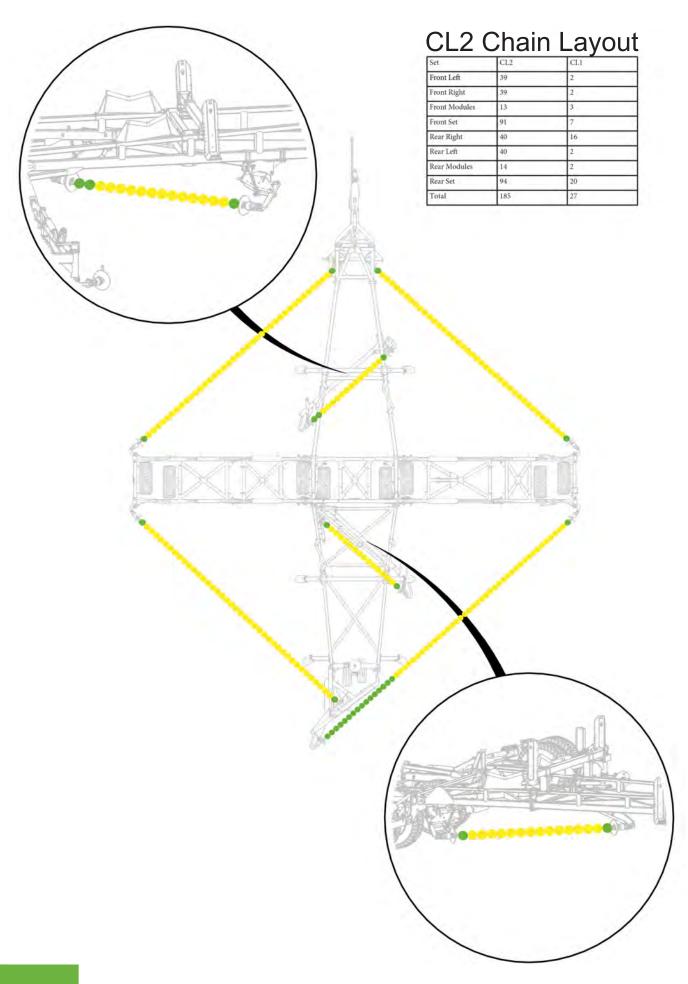

W36 Disc Chain - W36/25/7


Item No.	Description	Number	Qty
1	W36/25 Chain Link	0803-W36	1




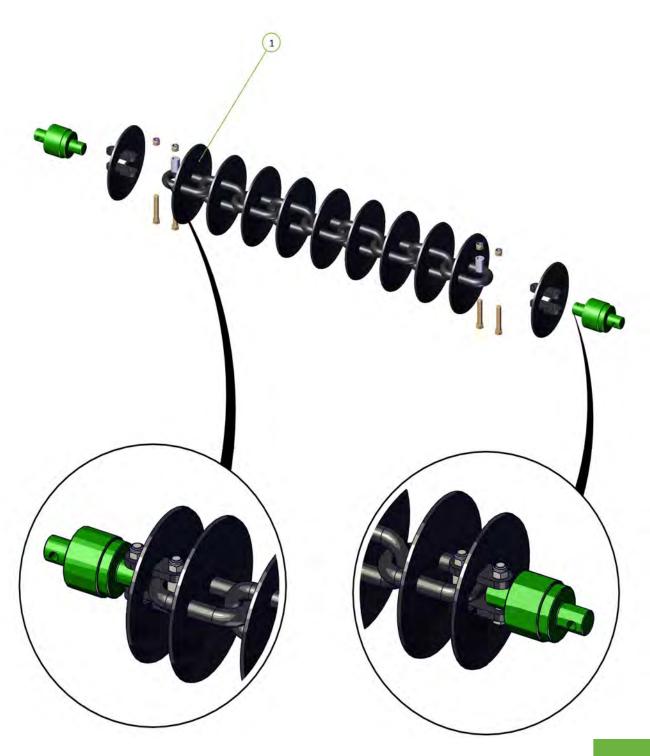


Spike Disc Chain - SD49/27/5

Item No.	Description	Number	Qty
1	10 Spike Disc Chain 49/27/5	0803-SD49	1
2	Tie Plate For 20mm Bolt/ Tie Plate For 24mm Bolt	0800-83.2 / 0800-83.3	4



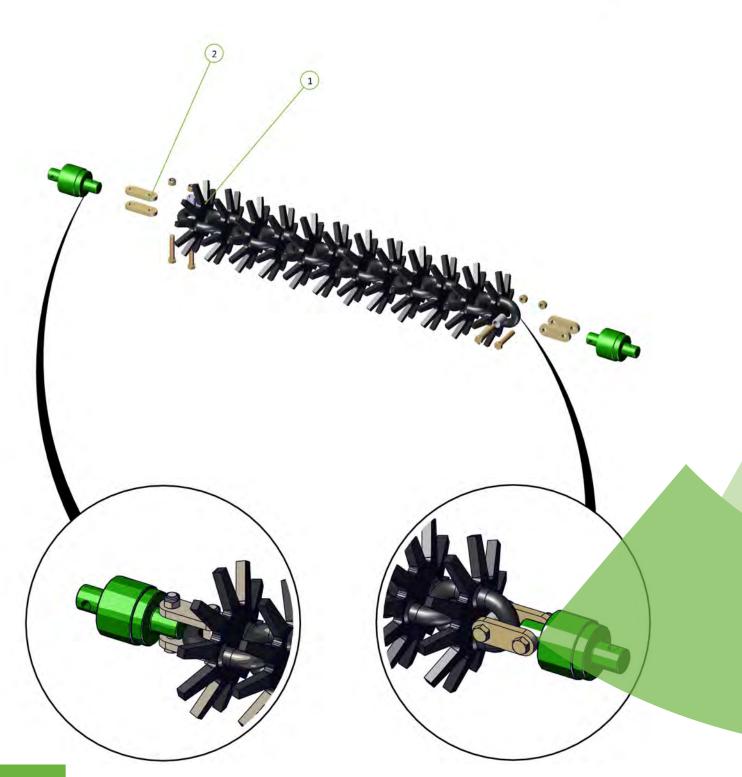


Section 6 Diagrams & Charts

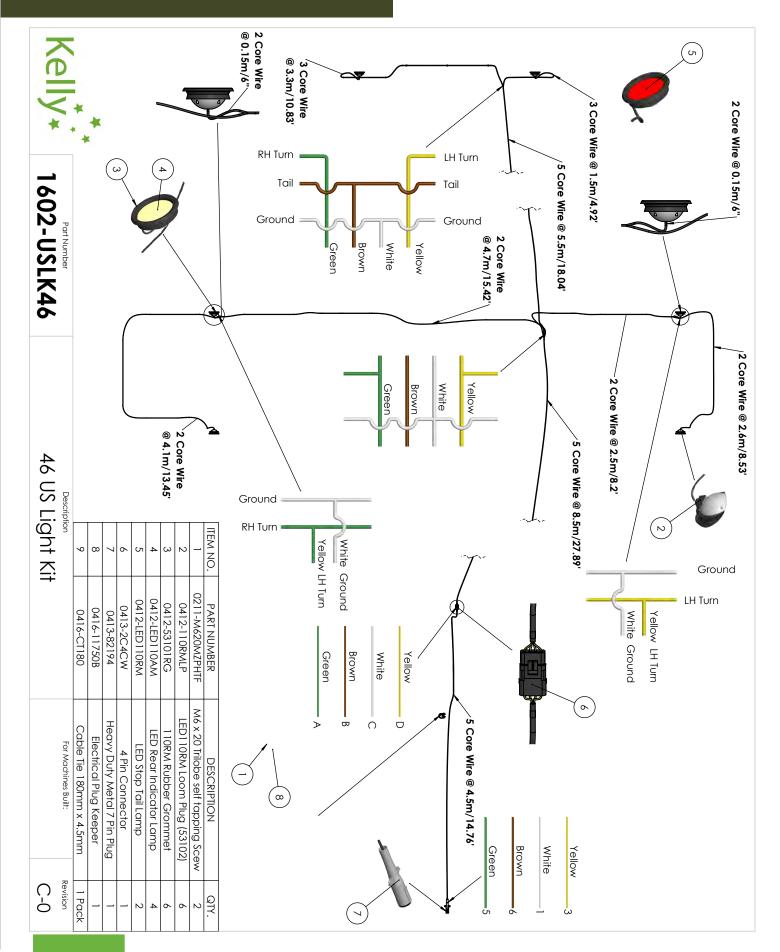


Mounting Swivels

Fixed housing end of swivel should always face forward

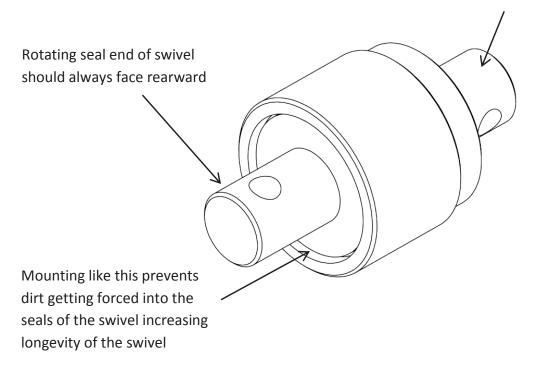

For Example

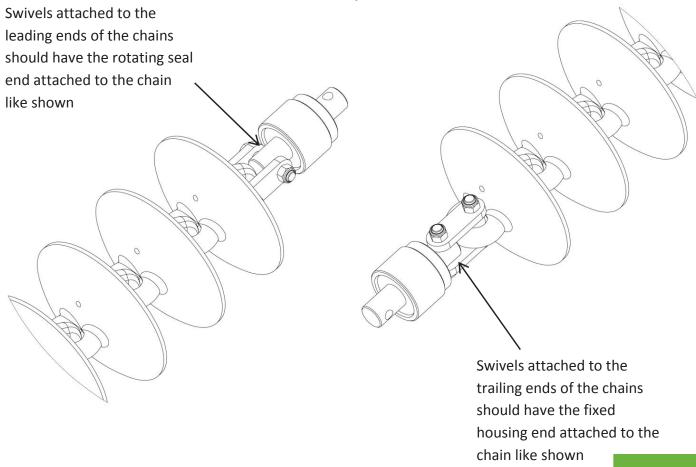

133

Operating speeds

Operating speeds for normal conditions		
Chain type	Speed	
Prickle Chain	6-10 Mph / 10-16 kmph	
Disc Mulch Chain	6-8 Mph / 10-12 kmph	
Transport / towing on roads	15 Mph / 25 kmph	

Tire pressure

Tire size	Ply	PSI	KPA
16.5L x 16.1	14	36	250
H40 x 14.5-19	26	60	410
11L - 15	10	44	300
15.5/80/24	16	58	400
16.5/85/24	16	55	380
550/60/22.5	16	40	280
400/60/22.5	16	50	350
12.5/80/18	14	85	590
15.0/70/18	14	71	490

Chain Harrow specifications

Model	model 46
Working width	46.6′/14.2m
Transport width	13.1′/4m
Transport height	13.5′/4.1m
Transport length	57.7′/17.6m

Model		Length	CL2	CL1	W36	R300	SD49	Prickle chain
			CL2 disc chain also requires CL1 disc chain					
Model 46	Front right	28.47' / 8.67m	CL2 - 39 CL1 - 2	53	52	69	69	96
	Front left	28.44' / 8.67m	CL2 - 39 CL1 - 2	53	52	69	69	96
	Rear right	36.28' / 11.06m	CL2 - 40 CL1 - 16	68	67	88	88	123
	Rear left	29.26' / 8.92m	CL2 - 40 CL1 - 2	55	54	72	72	99
	Modules front	11.05′/ 3.37m	CL2 - 13 CL1 - 3	20	20	27	27	37
	Modules rear	11.05′/ 3.37m	CL2 - 14 CL1 - 2	20	20	27	27	37

Section 7

Operation & Assembly Updates

Basic Operation

Unfolding:

- 1. Walk around and inspect the machine.
 - a. Check that chains are not hooked on framework
 - b. Check swivel bolts are in place and not broken
- c. Check that height adjusting chains have not fallen out of their slotted plates during transport.
- 2. Lower front A frame to working height.
- 3. Unfold wings holding the hydraulic lever until the tail is in working position and the main center cylinder pins have centerd in their slots.
- 4. Walk around and check that all chain links are straight and that working height of all swivels is correct for field conditions. Adjust if neccessary.
- 5. Move off with all chains in working position. If neccessary it is acceptabe to raise front A pull to transport height. This will lift the front chains off the ground and reduce the load on the tractor. Lower the front A pull once moving satisfactorily.

Folding:

- 1. Lower the front A frame to working height.

 (This is important to ensure that all chains locate correctly in their transport rests).
- 2. Fold the wings. They should move as follows; modules will raise, tail will raise, main center cylinders will retract, one or both, until the wings stand vertically. The left outer wing then the right outer wing will fold down.
- 3. Raise front A frame to transport height.
- 4. Walk around and check that chains have located correctly in transport rests.

Setting for correct chain tension

Wings

Use the spanner supplied. Loosen the lock nut adjacent to the tensioner assembly body.

Turn the tension bolt clockwise to compress the coil spring. Correct tension is acheived when spring retains its set length when operator rolls the chain fore and aft on the ground.

Retighten the lock nut.

See table below

Spring Compression Length

Model	inches	mm		
46	12.4	315		

When less than 4" (100mm) of thread remains visible on the adjustor bolt then a link must be removed from the chain









Module & Chain Tension

Modules

Loosen the lock nut on the draw bolt.

Tighten the adjusting nut clockwise until the outer face of the spring retaining washer is flush with the body of the module tensioning unit.

Retighten the lock nut.

If more than 8" (200mm) of thread is exposed then a link should be removed to maintain correct adjustment.





Importance of chain tension

Operational

It is imperative that the correct adjustment be maintained. Only through correct adjustment can a smooth and level finish be achieved in field working.


Loose chains lead to:

- Uneven performance across the width of the machine
- Uneven weed control
- Unsatisfactory incorporation
- Ineffective levelling
- Accelerated or premature chain wear
- Chains failing to engage with transport locators when folded
- Machine damage when folding or unfolding
- Uneven field surface with ridges and furrows being created. The leading 1/3rd of a loose chain is much more aggressive than the trailing 1/3rd and the center. This will mean that middle of the machine's front pair of chains will aggressively move soil outwards. The machine's rear pair of chains, if loose, have their aggressive 1/3rd near the wing extremity. It follows then that as the front discs push soil outwards, the least aggressive portion of the rear chain follows them and does not balance the soil movement.


This is exacerbated at the wings, effectively creating a broad ridge about halfway out each wing. It won't be evident in one pass, but is possible if care is not taken over time.

A correctly adjusted machine will not cause this phenomenon.

CL2 Chain Configuration




0803-CL2-Link Assembly

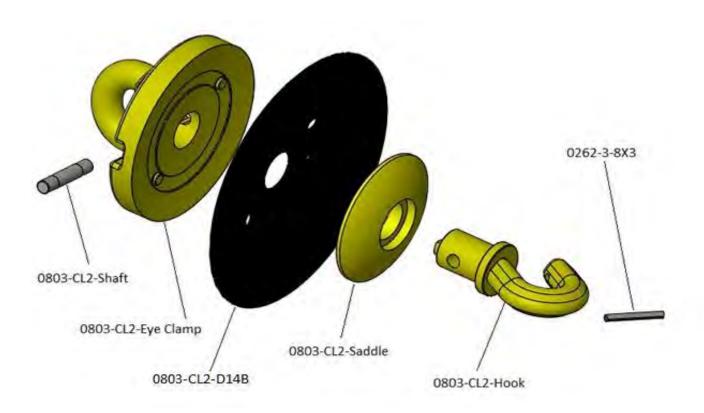

CL2 Chain Configuration

Model 46

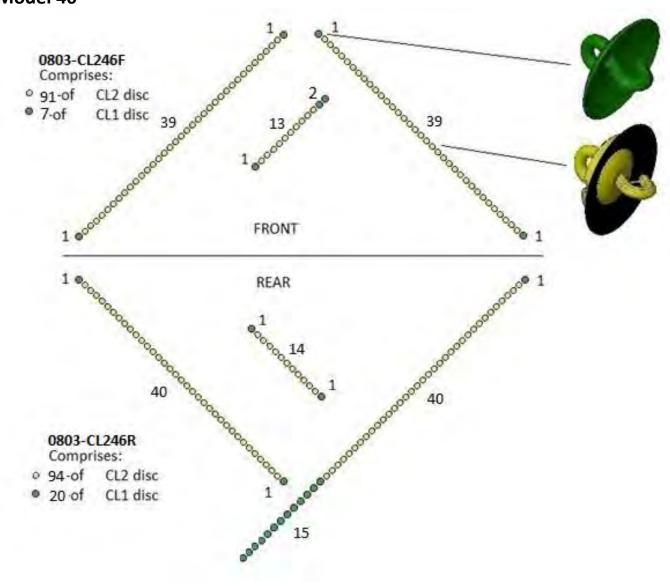

Please Note

Machines built from serial number 1170126 on will have 3 extra CL1 discs on the rear right chain.

CL2 Disc Change Procedure

This document describes a procedure for the safe changeover of CL2 discs.

NOTE: Each disc weighs 22kg (48lb). Appropriate care must be taken during manual handling

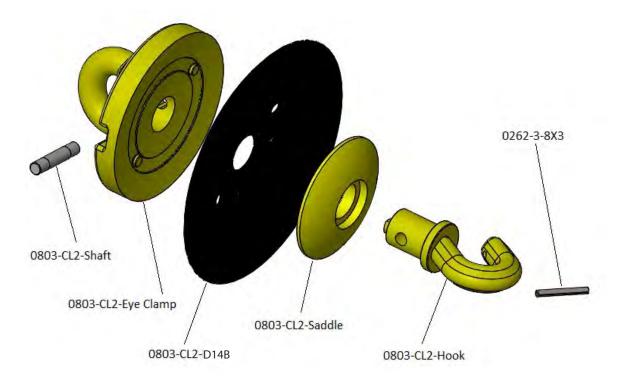


Figure 1: Exploded view of CL2 disc assembly

Changeover procedure as follows:

- 1. Locate press jig in press (see Figure 2 for orientation).
- 2. Load disc into press with Hook facing upwards ensure that Eye Clamp and Hook are secured within the jig with pins supplied
- 3. Close press, applying force to Saddle (see Figure 3). DO NOT exceed pressure of 9 Tonne (19,800lb)
- 4. With the clamping force applied, push or tap the shaft with a hammer & drift, and remove from the CL2 Disc assembly
- 5. Open the press and remove the Disc from the assembly
- 6. Ensure that all surfaces of the castings are free from debris

CL2 Disc Change Procedure

- 7. Place replacement disc on to Eye Clamp, ensuring that location holes align with casting lugs
- 8. Close press and re-apply clamping force. Visually confirm that Hook location hole is properly aligned with Eye Clamp location hole
- 9. Locate pin within hole and tap gently through both castings
- 10. Remove clamping force, and remove CL2 assembly from jig
- 11. CL2 disc is now ready for use. Repeat procedure as necessary

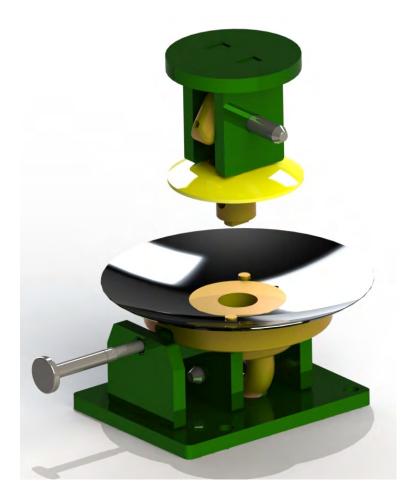


Figure 2: CL2 disc with press jig in Open position

CL2 Disc Change Procedure



Figure 3: CL2 disc with press jig in Closed position

